SIEMENS

Data sheet

3RS2800-1BA40



Temperature monitoring relay with display and IO-Link for resistance temperature sensors and thermocouples, 24 V DC, Width 22.5 mm, 2 change-over contacts, screw terminal


Figuresimil	ar


product brand name SIRIUS product designation Temperature monitoring relay design of the product Digital device for IO-Link, 1 sensor, 2 threshold values product type designation 3RS2
design of the product Digital device for IO-Link, 1 sensor, 2 threshold values product type designation 3RS2
product type designation 3RS2
General technical data
product function temperature monitoring
display version LED No
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value 300 V
test voltage for isolation test 6 kV
degree of pollution 3
maximum permissible voltage for protective separation
between control and auxiliary circuit 300 V
protection class IP 20
shock resistance according to IEC 60068-2-27 11g / 15 ms
vibration resistance according to IEC 60068-2-6 10 55 Hz: 0.35 mm
switching behavior monostable
mechanical service life (operating cycles) typical 10 000 000
electrical endurance (operating cycles) at AC-15 at 230 V 100 000 typical
thermal current of the switching element with contacts 5 A
certificate of suitability relating to ATEX Yes, with sensor extension module 3RS29
reference code according to IEC 81346-2 K
influence of the surrounding temperature 0.05% per K deviation from T20
measurable temperature
• initial value -99 °C
• full-scale value 1 800 °C
measurable Fahrenheit temperature
• initial value -146 °F
• full-scale value 3 276 °F
Substance Prohibitance (Date) 05/01/2012
product function
• error memory Yes
external reset Yes
design of the sensor connectableResistance sensors: Pt100, Pt1000, KTY83-110, KTY84, NTC ThermocoupleType J, K, T, E, N, S, R, B
measurable temperature with KTY-sensor maximum 300 °C
sensor current with KTY-sensor 0.33 mA
Control circuit/ Control

type of voltage of the control supply voltage	DC
control supply voltage at DC rated value	24 24 V
control supply voltage 1	
 at DC rated value 	24 V
• at DC	24 24 V
operating range factor control supply voltage rated value at	
DC	
initial value	0.7
full-scale value	1.25
supply voltage frequency for auxiliary and control circuit	50 60 Hz
number of measuring circuits	1
buffering time in the event of power failure minimum	20 ms
Precision	
relative metering precision	1 %
Short-circuit protection	
design of the fuse link	
 for short-circuit protection of the NO contacts of the relay outputs required 	gL/gG: 6 A or MCB type C: 1 A
 for short circuit protection of the NC contacts of the relay outputs required 	gL/gG: 6 A or MCB type C: 1 A
design of the fuse link	
 for short-circuit protection of the NO contacts of the relay outputs safety-related required 	gL/gG: 2 A or MCB type C: 1 A
 for short circuit protection of the NC contacts of the relay outputs safety-related required 	gL/gG: 2 A or MCB type C: 1 A
Communication/ Protocol	
protocol is supported IO-Link protocol	Yes
IO-Link transfer rate	COM2 (38,4 kBaud)
point-to-point cycle time between master and IO-Link device minimum	5 ms
type of voltage supply via input/output link master	Yes
data volume	
 of the address range of the inputs with cyclical transfer total 	4 byte
 of the address range of the outputs with cyclical transfer total 	2 byte
Auxiliary circuit	
material of switching contacts	AgSnO2
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	2
operational current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5 mA) $$
contact rating of auxiliary contacts according to UL	R300 / B300
operating frequency rated value	50 60 Hz
ampacity of the output relay at AC-15 at 250 V at 50/60 Hz	3 A
ampacity of the output relay at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
continuous current of the DIAZED fuse link of the output relay	6 A
continuous current of DIAZED fuse link of the output relay safety-related	2 A
Electromagnetic compatibility	
EMC emitted interference according to IEC 60947-1	class A
conducted interference	
 due to burst according to IEC 61000-4-4 	2 kV (power ports), 1 kV (signal ports)
• due to conductor-earth surge according to IEC 61000-4-5	2 kV (line to ground)
 due to conductor-conductor surge according to IEC 	1 kV (line to line)

	40.)//		
field-based interference according to IEC 61000-4-3	10 V/m		
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge		
Galvanic isolation			
design of the electrical isolation	Protective separation		
galvanic isolation			
 between input and output 	Yes		
 between the outputs 	Yes		
 between the voltage supply and other circuits 	Yes		
Safety related data			
Safety Integrity Level (SIL) according to IEC 61508	1		
SIL Claim Limit (subsystem) according to EN 62061	1		
performance level (PL) according to EN ISO 13849-1	C		
category according to EN ISO 13849-1	1		
Safe failure fraction (SFF)	66 %		
PFHD with high demand rate according to EN 62061	3.9E-7 1/h		
hardware fault tolerance according to IEC 61508	0		
Connections/ Terminals			
product component removable terminal for auxiliary and control circuit	Yes		
type of electrical connection	screw-type terminals		
 for auxiliary and control circuit 	screw-type terminals		
type of connectable conductor cross-sections			
• solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)		
 finely stranded with core end processing 	1x (0.5 4 mm²), 2x (0.5 2.5 mm²)		
 for AWG cables solid 	1x (20 12), 2x (20 14)		
connectable conductor cross-section			
• solid	0.5 4 mm²		
 finely stranded with core end processing 	0.5 4 mm²		
AWG number as coded connectable conductor cross			
section			
• solid	20 12		
 stranded 	20 12		
tightening torque with screw-type terminals	20 12 0.6 0.8 N·m		
tightening torque with screw-type terminals			
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting — forwards — backwards — upwards — downwards — at the side	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting forwards backwards backwards upwards at the side • for grounded parts forwards for	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - backwards - upwards -	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - backwards - upwards - at the side - downwards - at the side - at the sid	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting forwards backwards backwards at the side • for grounded parts forwards backwards backwards backwards at the side downwards at the side at	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - at the side • for live parts - forwards - backwards - upwards - backwards - upwards - backwards - upwards - backwards - downwards • for live parts - forwards - backwards - upwards - downwards - backwards - upwards - backwards - backwa	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - at the side • for live parts - forwards - backwards - upwards - backwards - backwards - upwards - forwards - forwards - at the side • for live parts - forwards - backwards - upwards - backwards - upwards - backwards - backwards - backwards - backwards - forwards - backwards - backward	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm		
tightening torque with screw-type terminals Installation/ mounting/ dimensions mounting position fastening method height width depth required spacing • with side-by-side mounting - forwards - backwards - backwards - upwards - downwards - at the side • for grounded parts - forwards - backwards - upwards - backwards - upwards - at the side • for live parts - forwards - backwards - upwards - backwards - upwards - backwards - upwards - forwards - forwards - at the side - downwards - at the side - downwards - backwards - upwards - at the side - downwards - backwards - upwards - at the side - downwards - backwards - upwards - backwards - ba	0.6 0.8 N·m any screw and snap-on mounting onto 35 mm DIN rail 100 mm 22.5 mm 90 mm 0 mm		

during operation during storage during transport relative humidity during explosion protection explosion protection Certificates/ approvals General Product App	operation category for dust category for gas	-40 -40 70 % Ex II	. +60 °C . +85 °C . +85 °C (2) D [b1] [Ex h] [pyb] [tb] [(2) G [b1] [Ex h] [db] [eb] [i		sb] II C Gb EMC EMC		
For use in hazardous	locations	Functional Safety/Safety of Ma- chinery	Declaration of Conform	nity	Test Certificates		
Explosion Protection Certificate	K ATEX	<u>Type Examination Cer-</u> tificate	UK CA	CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>		
Marine / Shipping	other	Railway					
Further information	<u>Confirmation</u>	<u>Confirmation</u>					
Siemens has decided to exit the Russian market (see here). https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business Siemens is working on the renewal of the current EAC certificates. Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus). Information on the packaging https://support.industry.siemens.com/cs/ww/en/view/109813875 Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RS2800-1BA40 Cax online generator http://support.automation.siemens.com//WW/CAXorder/default.aspx?lang=en&mlfb=3RS2800-1BA40 Service&Support (Manuals, Certificates, Characteristics, FAQs,) https://support.industry.siemens.com/cs/ww/en/ps/3RS2800-1BA40 Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros,) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RS2800-1BA40& Characteristic: Derating https://support.industry.siemens.com/cs/ww/en/ps/3RS2800-1BA40/manual							

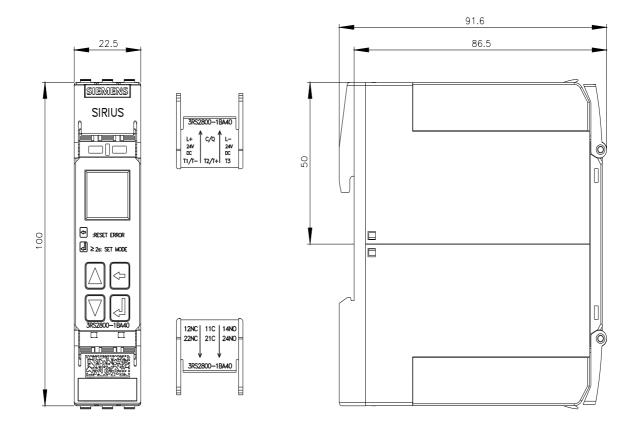

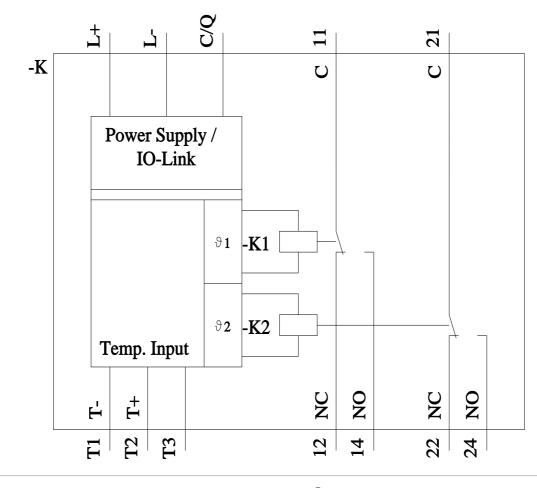

last modified:

11/21/2022 🖸