


# G3VM-□WR

MOS FET Relays

P-SON 4-pin, High-Current and Low-ON-Resistance Type

## New Non-Leaded, High-Current P-SON Package

- Load voltages 30 V/60 V/100 V/200 V.
- 30 V relay: Continuous load current of 4.5 A max.
- 60 V relay: Continuous load current of 3 A max.
- 100 V relay: Continuous load current of 2 A max.
- 200 V relay: Continuous load current of 0.35 A max.
- High ambient operating temperature: -40°C to +110°C

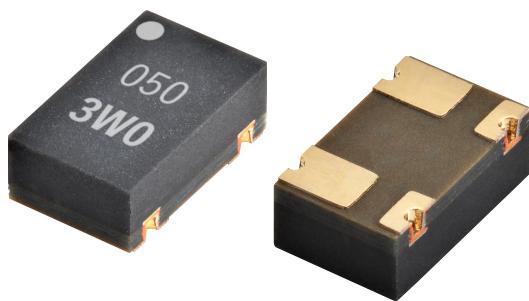

Note: The actual product is marked differently from the image shown above.


RoHS Compliant

## ■ Application Examples

- |                                |                                |
|--------------------------------|--------------------------------|
| • Semiconductor test equipment | • Test & measurement equipment |
| • Communication equipment      | • Data loggers                 |

## ■ Package (Unit : mm, average)

P-SON 4-pin



Note: The actual product is marked differently from the image shown above.

## ■ Model Number Legend

G3VM-□ □ □ □  
1 2 3 4

### 1. Load voltages

- 3: 30 V
- 6: 60 V
- 10: 100 V
- 20: 200 V

### 2. Contact form

- 1: 1a (SPST-NO)

### 3. Package type

- W: P-SON 4-pin

### 4. Additional function

- R: Low on-resistance

## ■ Ordering Information

Package type	Contact form	Terminals	Load voltage (peak value) *	Continuous load current (peak value) *	Packing/Tape cut		Packing/Tape & reel	
					Model	Minimum package quantity	Model	Minimum package quantity
P-SON4	1a (SPST-NO)	Surface-mounting Terminals	30 V	4.5 A	G3VM-31WR	1 pc.	G3VM-31WR (TR05)	500 pcs.
			60 V	3 A	G3VM-61WR		G3VM-61WR (TR05)	
			100 V	2 A	G3VM-101WR		G3VM-101WR (TR05)	
			200 V	0.35 A	G3VM-201WR		G3VM-201WR (TR05)	

\* The AC peak and DC values are given for the load voltage and continuous load current.

Note: When ordering tape packing, add "(TR05)" (500 pcs/reel) to the model number.

Ask your OMRON representative for orders under 500 pcs. We can supply products with the tape already cut.

Tape-cut P-SON is packaged without humidity resistance. Use manual soldering to mount them.

Refer to common precautions.

G  
3  
V  
M  
I  
□  
W  
R

P  
I  
S  
O  
N

■Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	G3VM-31WR	G3VM-61WR	G3VM-101WR	G3VM-201WR	Unit	Measurement conditions
Input	LED forward current	$I_F$		30		mA	
	LED forward current reduction rate	$\Delta I_F/\text{°C}$		-0.3		$\text{mA/}^\circ\text{C}$	$T_a \geq 25^\circ\text{C}$
	LED reverse voltage	$V_R$		6		V	
	Junction temperature	$T_J$		125		$^\circ\text{C}$	
Output	Load voltage (AC peak/DC)	$V_{OFF}$	30	60	100	200	V
	Continuous load current (AC peak/DC)	$I_o$	4.5	3	2	0.35	A
	ON current reduction rate	$\Delta I_o/\text{°C}$	-45	-30	-20	-3.5	$\text{mA/}^\circ\text{C}$
	Pulse ON current	$I_{op}$	10	9	6	1.05	A
Junction temperature		$T_J$		125		$^\circ\text{C}$	
Dielectric strength between I/O *		$V_{i-o}$		500		Vrms	AC for 1 min
Ambient operating temperature		$T_a$		-40 to +110		$^\circ\text{C}$	
Ambient storage temperature		$T_{stg}$		-40 to +125		$^\circ\text{C}$	With no icing or condensation
Soldering temperature		-		260		$^\circ\text{C}$	10 s

Note: The product structure is sensitive to static electricity. When handling it, be sure to take measures against static electricity for the workbench, workers, soldering iron, and soldered mounted devices.

\* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

■Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	G3VM-31WR	G3VM-61WR	G3VM-101WR	G3VM-201WR	Unit	Measurement conditions
Input	$V_F$	Minimum	1.1			V	$I_F=10 \text{ mA}$
		Typical	1.22				
		Maximum	1.4				
Reverse current	$I_R$	Maximum		10		$\mu\text{A}$	$V_R=5 \text{ V}$
Capacitance between terminals	$C_T$	Typical		70		pF	$V=0 \text{ V}, f=1 \text{ MHz}$
Trigger LED forward current	$I_{FT}$	Typical	1	0.9	1	mA	$I_o=1 \text{ A} (\text{G3VM-31WR/61WR/101WR})$ $I_o=0.35 \text{ A} (\text{G3VM-201WR})$
		Maximum		3			
Release LED forward current	$I_{FC}$	Minimum	0.1			mA	$I_{OFF}=10 \mu\text{A}$
		Typical	0.9	0.8	0.9		
Output	$R_{ON}$	Typical	25	45	130	$m\Omega$	$I_o=\text{Continuous load current rated value}$ $I_F=5 \text{ mA}, t<1 \text{ s}$
		Maximum	50	100	200		
Current leakage when the relay is open	$I_{LEAK}$	Maximum	1000 (10)		10	nA	$V_{OFF}=\text{Load voltage rated value}$ 31WR : ( $V_{OFF}=20 \text{ V}$ ) 61WR : ( $V_{OFF}=40 \text{ V}$ ) 101WR : ( $V_{OFF}=80 \text{ V}$ )
Capacitance between terminals	$C_{off}$	Typical	450	250	170	75	pF
Capacitance between I/O terminals	$C_{i-o}$	Typical		1		pF	$f=1 \text{ MHz}, V_s=0 \text{ V}$
Insulation resistance between I/O terminals	$R_{i-o}$	Typical		$10^8$		MΩ	$V_{i-o}=500 \text{ VDC}, RoH \leq 60\%$
Turn-ON time	$t_{ON}$	Typical	3	2	0.5	ms	$I_F=5 \text{ mA}, R_L=200 \Omega,$ $V_{DD}=10 \text{ V} (\text{G3VM-31WR})$ $V_{DD}=20 \text{ V}$ (G3VM-61WR/101WR/201WR) *
		Maximum	5	3	1		
Turn-OFF time	$t_{OFF}$	Typical	0.04	0.03	0.04		
		Maximum		1			

\* Turn-ON and Turn-OFF Times



## ■Recommended Operating Conditions

For high reliability usage, Recommended Operation Conditions are measures that take into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfying several conditions.


Item	Symbol		G3VM-31WR	G3VM-61WR	G3VM-101WR	G3VM-201WR	Unit
Load voltage (AC peak/DC)	$V_{DD}$	Maximum	24	48	80	160	V
Operating LED forward current	$I_F$	Typical		5			mA
		Maximum		20			
		Minimum		-20			
Continuous load current (AC peak/DC)	$I_o$	Maximum	4.5	3	2	0.35	A
Ambient operating temperature	$T_a$	Minimum					$^\circ\text{C}$
		Maximum		85			

G3VM-□WR


PISON

### ■Engineering Data


● LED forward current vs.  
ambient temperature

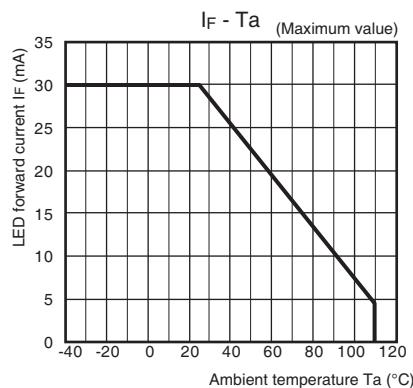


● Continuous load current vs.  
ambient temperature

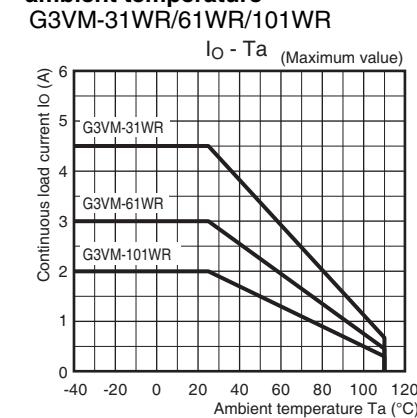


G3VM-201WR

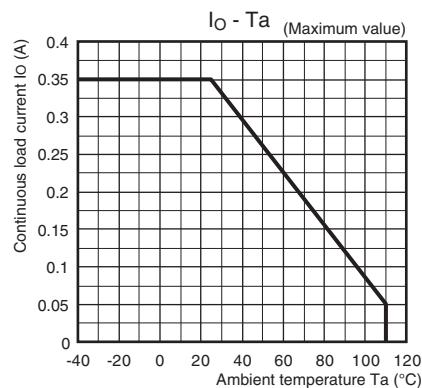


● LED forward current vs.  
LED forward voltage

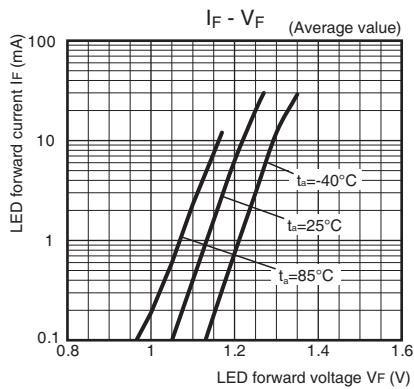

● Continuous load current vs.  
on-state voltage

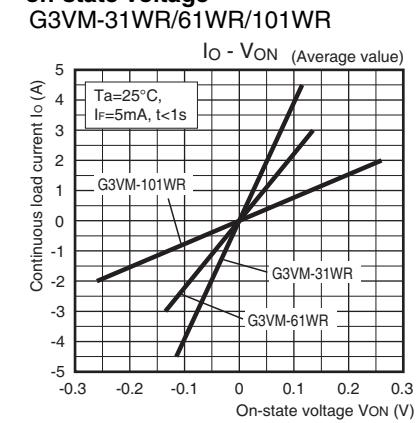


G3VM-201WR

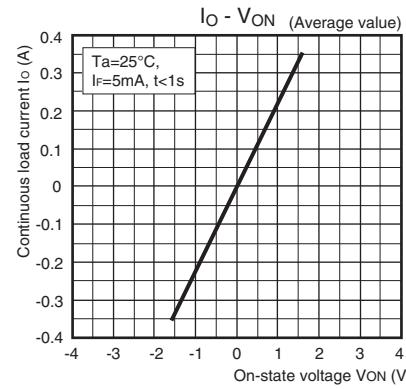


● On-state resistance vs.  
ambient temperature

G3VM-31WR/61WR/101WR

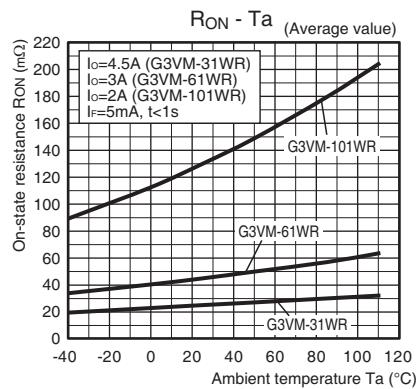


G3VM-201WR

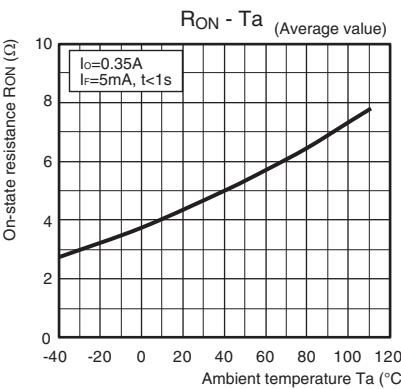


● Trigger LED forward current vs.  
ambient temperature

G3VM-31WR/61WR/101WR

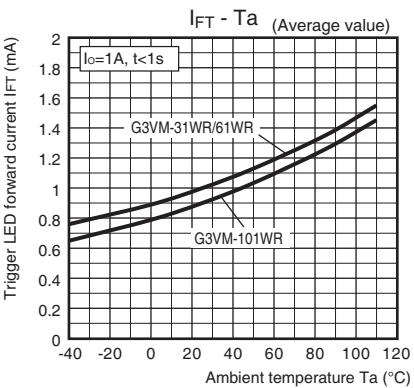

G3VM-201WR

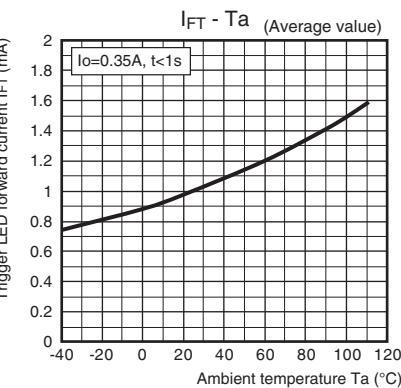

G  
3  
V  
M  
I  
W  
R


P  
I  
S  
O  
N

### ■Engineering Data


#### ● Turn ON, turn OFF time vs.

##### LED forward current

G3VM-31WR/61WR/101WR

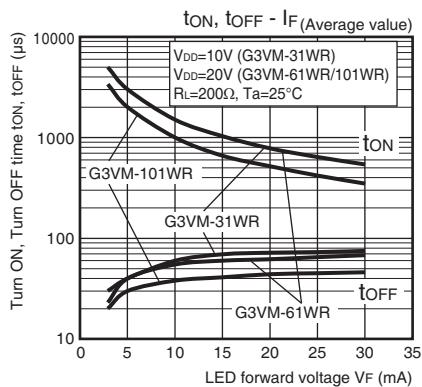


G3VM-201WR

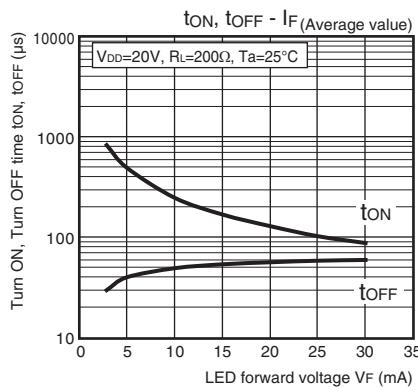


#### ● Turn ON, turn OFF time vs. ambient temperature

G3VM-31WR/61WR/101WR

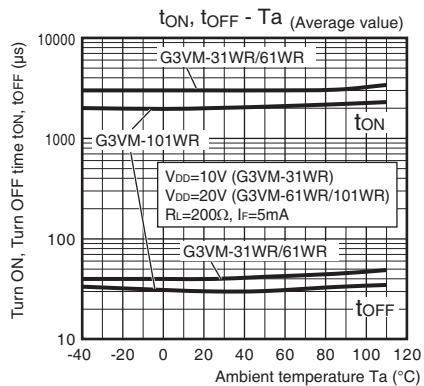


G3VM-201WR

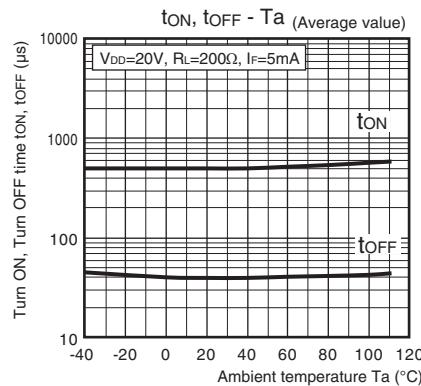


#### ● Current leakage vs. load voltage

G3VM-31WR/61WR/101WR

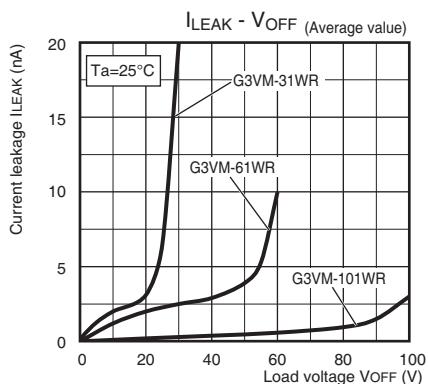


G3VM-201WR

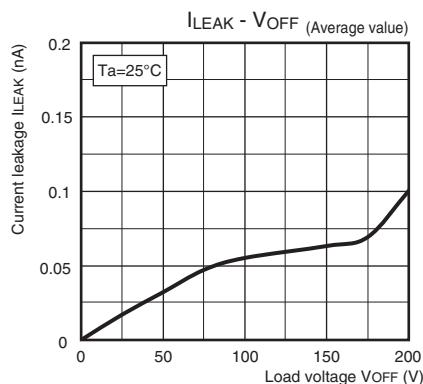


#### ● Current leakage vs. ambient temperature

I<sub>LEAK</sub> - Ta (Average value)

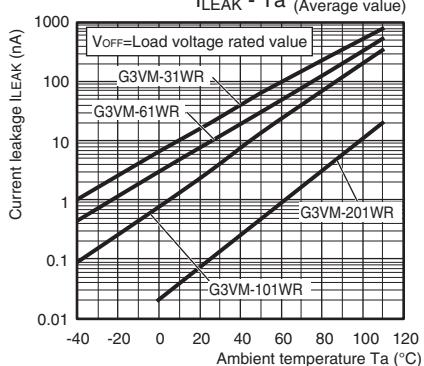

C<sub>OFF</sub> - V<sub>OFF</sub> (Average value)

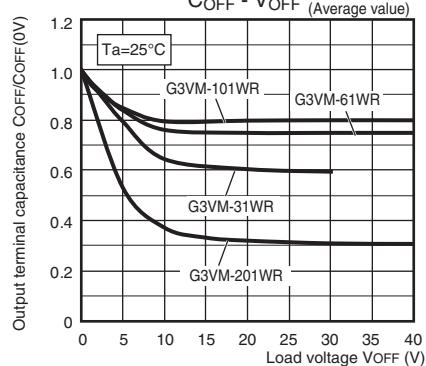

G  
3  
V  
M  
I  
W  
R


P  
I  
S  
O  
N

### ■Appearance / Terminal Arrangement / Internal Connections

#### ■Appearance

P-SON (Power - Small Outline Non-Leaded)


P-SON 4-pin



\* Actual model name marking for each model

Model	Marking
G3VM-31WR	3W0
G3VM-61WR	6W0
G3VM-101WR	AW0
G3VM-201WR	BW0

#### ■Terminal Arrangement/Internal Connections (Top View)





**Note 1.** The actual product is marked differently from the image shown above.  
**2.** "G3VM" does not appear in the model number on the relay.

### ■Dimensions (Unit: mm)

#### Surface-Mounting Terminals


Weight: 0.02 g

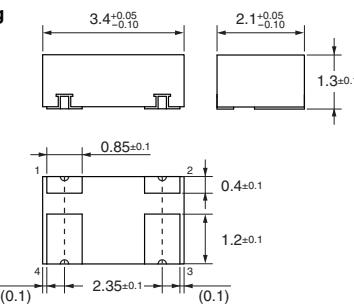

**Note:** The actual product is marked differently from the image shown here.

#### Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Unless otherwise specified, the dimensional tolerance is  $\pm 0.1$  mm.

### ■Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

G  
3  
V  
M  
I  
□  
W  
R

Please check each region's Terms & Conditions by region website.

### OMRON Corporation

Electronic and Mechanical Components Company

#### Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>