EMC Components

⊗TDK

Common mode filters

Automobile ultra high-speed differential signal line (for infotainment) ACM-H series



AEC-Q200

ACM2012H-T03 type




FEATURES

- \bigcirc Highly reliable with a temperature range of -40 to +105°C.
- O Common mode EMI measure: Possible to suppress waveform common mode EMI without straining the waveform.
- Operating temperature range: -40 to +105°C
- O Compliant with AEC-Q200

APPLICATION

- O Radiated noise suppression for car multimedia interfaces (MOST, HDMI, IDB-1394, etc.).
- Portable PC and PC interfaces (USB, IEEE1394)
- ODVC, CD/DVD-ROM, etc.
- O Application guides: Car Infotainment

PART NUMBER CONSTRUCTION



CHARACTERISTICS SPECIFICATION TABLE

Common impedanc		DC resistance	Rated current	Rated voltage	Insulation resistance	Cutoff frequency	Characteristic impedance	Part No.
[at 100MH	-Iz]	[1 line]						
(Ω)min.	(Ω)typ.	(Ω)max.	(mA)max.	(V)max.	(MΩ)min.	(GHz)typ.	(Ω)typ.	
65	90	0.30	300	50	10	6	100	ACM2012H-900-2P-T03

Measurement equipment


Measurement item	Product No.	Manufacturer
Common mode impedance	4991A	Keysight Technologies
DC resistance	4338A	Keysight Technologies
Insulation resistance	4339A	Keysight Technologies

* Equivalent measurement equipment may be used.



ACM2012H-T03 type

■ IMPEDANCE VS. FREQUENCY CHARACTERISTICS

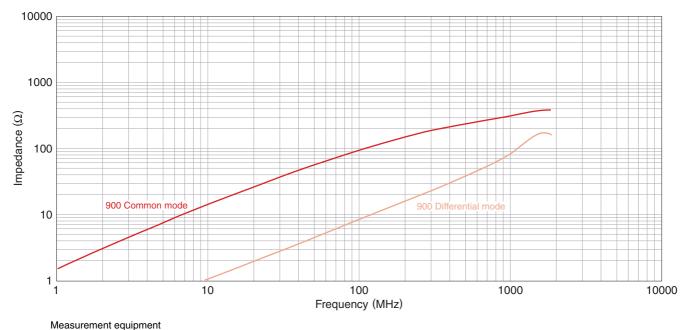


Product No.	Manufacturer		
4991A	Keysight Technologies		

* Equivalent measurement equipment may be used.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.
(2/4)
Please note that the contents may change without any prior notice due to reasons such as upgrading.
20181015


ACM2012H-T03 type

SHAPE & DIMENSIONS




Dimensions in mm


RECOMMENDED LAND PATTERN




Dimensions in mm

CIRCUIT DIAGRAM




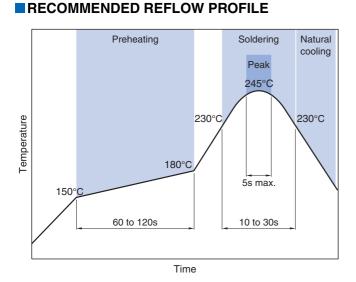


PACKAGING STYLE

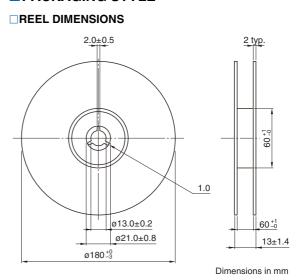


TAPE DIMENSIONS

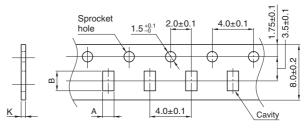

Dimensions in mm



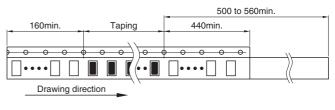

Dimensions in mm

PACKAGE QUANTITY

Package quantity	2,000 pcs/reel
------------------	----------------

TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating	Storage	Individual
temperature range	temperature range*	weight
–40 to +105 °C	–40 to +105 °C	10 mg

* The storage temperature range is for after the assembly.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. (3/4) Please note that the contents may change without any prior notice due to reasons such as upgrading.

EMC Components

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

 The storage period is less than 6 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. 				
Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).				
 Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C. 				
Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.				
When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.				
Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.				
 Carefully lay out the coil for the circuit board design of the non-magn A malfunction may occur due to magnetic interference. 	netic shield type.			
\bigcirc Use a wrist band to discharge static electricity in your body through	the grounding wire.			
○ Do not expose the products to magnets or magnetic fields.				
O Do not use for a purpose outside of the contents regulated in the de	livery specifications.			
 The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us. 				
 (1) Aerospace/aviation equipment (2) Transportation equipment (cars, electric trains, ships, etc.) (3) Medical equipment (4) Power-generation control equipment (5) Atomic energy-related equipment (6) Seabed equipment (7) Transportation control equipment 	 (8) Public information-processing equipment (9) Military equipment (10) Electric heating apparatus, burning equipment (11) Disaster prevention/crime prevention equipment (12) Safety equipment (13) Other applications that are not considered general-purpose applications 			
When designing your equipment even for general-purpose applications tection circuit/device or providing backup circuits in your equipment.	s, you are kindly requested to take into consideration securing pro-			