

Floodlight


ZVZF300

Part Number



- Continuous mode or flash mode synchronized with the camera
- Diffuse light for transmitted light and incident light applications
- Rugged housing (IP67) with minimal thickness and narrow framing

wenglor backlights are ideally suited for vision applications in which large areas need to be illuminated. They can be operated in the continuous mode, or synchronized to the digital camera in the flash mode. Thanks to their diffuse light, the backlights are ideal for applications with transmitted light or incident light. Above all in systems where space is limited, users profit from the rugged housing (IP67) with minimal thickness and narrow framing, and at the same time from the large illuminated surface area.

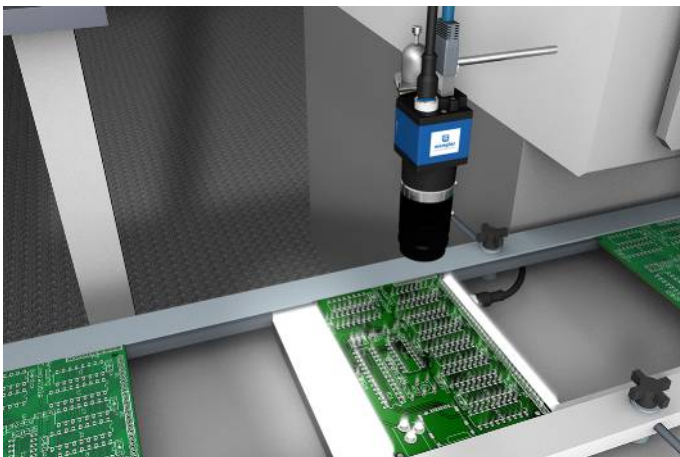

Technical Data

Optical Data

Light Source	White Light
Service Life (T = +25 °C)	100000 h
Luminance (Continuous Mode)	7400 cd/m ²
Luminance (Flash Mode)	31000 cd/m ²

Electrical Data

Supply Voltage	18...30 V DC
Current Consumption Flash Mode (U _b = 24 V)	< 710 mA
Current Consumption Continuous Mode (U _b = 24 V)	< 120 mA
Flash Duration	17...30000 μs
Duty Cycle	< 0,2
Temperature Range	-30...50 °C
Storage temperature	-30...60 °C
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III

Mechanical Data

Luminous field	60 × 60 mm
Housing Material	Aluminum, anodised
Optic Cover	PMMA
Degree of Protection	IP67
Connection	M12 × 1; 4/5-pin

Safety-relevant Data

MTTFd (EN ISO 13849-1)	678,63 a
------------------------	----------


Connection Diagram No.	181
------------------------	-----

Connection Table No.	60
----------------------	----


Suitable Connection Equipment No.	37
-----------------------------------	----

Complementary Products

Connection Cable ZC4G001

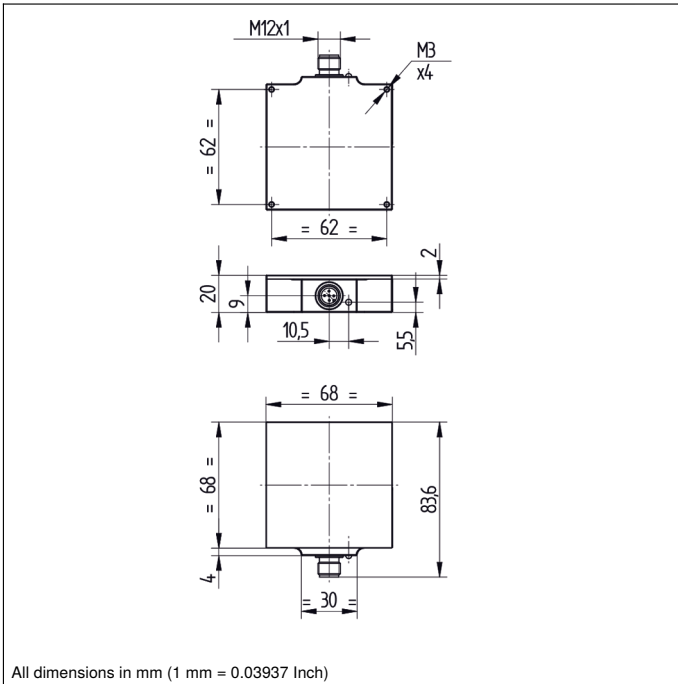

All dimensions in mm (1 mm = 0.03937 Inch)

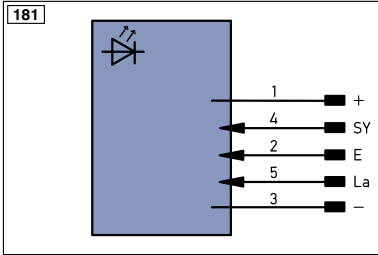

Legend

+ Supply Voltage +	nc not connected	EN_AES42Z Encoder A/Ā (TTL)
- Supply Voltage 0 V	U Test Input	EN_BES42Z Encoder B/B̄ (TTL)
~ Supply Voltage (AC Voltage)	Ū Test Input inverted	EN_A Encoder A
A Switching Output (NO)	W Trigger Input	EN_B Encoder B
Ā Switching Output (NC)	W- Ground for the Trigger Input	A_{MIN} Digital output MIN
V Contamination/Error Output (NO)	O Analog Output	A_{MAX} Digital output MAX
V̄ Contamination/Error Output (NC)	O- Ground for the Analog Output	A_{OK} Digital output OK
E Input (analog or digital)	BZ Block Discharge	SY_{in} Synchronization In
T Teach Input	AWV Valve Output	SY_{OUT} Synchronization OUT
Z Time Delay (activation)	a Valve Control Output +	OL_T Brightness output
S Shielding	b Valve Control Output 0 V	M Maintenance
RxD Interface Receive Path	SY Synchronization	rsv reserved
TxD Interface Send Path	SY- Ground for the Synchronization	Wire Colors according to IEC 60757
RDY Ready	E+ Receiver-Line	BK Black
GND Ground	S+ Emitter-Line	BN Brown
CL Clock	⊕ Grounding	RD Red
E/A Output/Input programmable	S_nR Switching Distance Reduction	OG Orange
IO-Link	Rx+/- Ethernet Receive Path	YE Yellow
PoE Power over Ethernet	Tx+/- Ethernet Send Path	GN Green
IN Safety Input	Bus Interfaces-Bus A(+)/B(-)	BU Blue
OSSD Safety Output	La Emitted Light disengageable	VT Violet
Signal Signal Output	Mag Magnet activation	GY Grey
Bl..D+/- Ethernet Gigabit bidirect. data line (A-D)	RES Input confirmation	WH White
EN₀ES42Z Encoder 0-pulse 0-0̄ (TTL)	EDM Contactor Monitoring	PK Pink
		GNYE Green/Yellow

