## **SIEMENS**

Data sheet 3RS2600-1BA30



Temperature monitoring relay with display for resistance temperature sensors and thermocouples, 24 V AC/DC, Width 22.5 mm, 2 change-over contacts, screw terminal

Figure similar

product brand name	SIRIUS	
product designation	Temperature monitoring relay	
design of the product	Digital device, 1 sensor, 2 threshold values	
product type designation	3RS2	
General technical data		
product function	temperature monitoring	
display version LED	No	
insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V	
test voltage for isolation test	4 kV	
degree of pollution	3	
protection class IP	20	
shock resistance according to IEC 60068-2-27	11g / 15 ms	
vibration resistance according to IEC 60068-2-6	10 55 Hz: 0.35 mm	
switching behavior	monostable	
mechanical service life (operating cycles) typical	10 000 000	
electrical endurance (operating cycles) at AC-15 at 230 V typical	100 000	
thermal current of the switching element with contacts maximum	5 A	
certificate of suitability relating to ATEX	Yes, with sensor extension module 3RS29	
reference code according to IEC 81346-2	K	
influence of the surrounding temperature	0.05% per K deviation from T20	
measurable temperature		
• initial value	-99 °C	
full-scale value	1 800 °C	
measurable Fahrenheit temperature		
• initial value	-146 °F	
full-scale value	3 276 °F	
Substance Prohibitance (Date)	05/01/2012	
product function		
• error memory	Yes	
external reset	Yes	
design of the sensor connectable	Resistance sensors: Pt100, Pt1000, KTY83-110, KTY84, NTC Thermocouples: Type J, K, T, E, N, S, R, B	
measurable temperature with KTY-sensor maximum	300 °C	
sensor current with KTY-sensor	0.33 mA	
Control circuit/ Control		
type of voltage of the control supply voltage	AC/DC	
control supply voltage at AC		

• at 50 Hz rated value	24 24 V
at 60 Hz rated value	24 24 V
control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
● at 50 Hz	24 24 V
at 60 Hz rated value	24 V
• at 60 Hz	24 24 V
control supply voltage 2 at AC	
at 50 Hz rated value	24 V
at 60 Hz rated value	24 V
control supply voltage at DC rated value	24 24 V
control supply voltage 1	
at DC rated value	24 V
• at DC	24 24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.85
full-scale value	1.1
supply voltage frequency for auxiliary and control circuit	50 60 Hz
number of measuring circuits	1
buffering time in the event of power failure minimum	20 ms
Precision	
relative metering precision	1 %
Short-circuit protection	
Short-circuit protection design of the fuse link	
	gL/gG: 6 A or MCB type C: 1 A
design of the fuse link  • for short-circuit protection of the NO contacts of the relay	gL/gG: 6 A or MCB type C: 1 A gL/gG: 6 A or MCB type C: 1 A
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay	
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required	
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay	gL/gG: 6 A or MCB type C: 1 A
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay	gL/gG: 6 A or MCB type C: 1 A gL/gG: 2 A or MCB type C: 1 A
design of the fuse link  of or short-circuit protection of the NO contacts of the relay outputs required  of or short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  of or short-circuit protection of the NO contacts of the relay outputs safety-related required  of or short circuit protection of the NC contacts of the relay outputs safety-related required	gL/gG: 6 A or MCB type C: 1 A gL/gG: 2 A or MCB type C: 1 A
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A
design of the fuse link	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts number of NC contacts for auxiliary contacts	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2 0
design of the fuse link	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2 0 0
design of the fuse link	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2 0 0
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at DC-13	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2 0 0 2
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at DC-13  • at 24 V	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2 0 0 2
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at DC-13  • at 24 V  • at 125 V	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2 0 0 2 1 A 0.2 A
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at DC-13  • at 24 V  • at 125 V  • at 250 V	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2  0  0  1 A  0.2 A  0.1 A  one incorrect switching operation of 100 million switching operations (17 V, 5
design of the fuse link	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2  0  0  2  1 A  0.2 A  0.1 A  one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at DC-13  • at 24 V  • at 125 V  • at 250 V  contact reliability of auxiliary contacts  contact rating of auxiliary contacts according to UL	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  No  AgSnO2  0  0  2  1 A  0.2 A  0.1 A  one incorrect switching operation of 100 million switching operations (17 V, 5 mA)  R300 / B300
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  operational current of auxiliary contacts at DC-13  • at 24 V  • at 125 V  • at 250 V  contact reliability of auxiliary contacts according to UL  operating frequency rated value	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  Ro  AgSnO2  0  0  2  1 A  0.2 A  0.1 A  one incorrect switching operation of 100 million switching operations (17 V, 5 mA)  R300 / B300  50 60 Hz
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of CO contacts for auxiliary contacts  operational current of auxiliary contacts at DC-13  • at 24 V  • at 125 V  • at 250 V  contact reliability of auxiliary contacts according to UL  operating frequency rated value  ampacity of the output relay at AC-15 at 250 V at 50/60 Hz	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  Ro  AgSnO2  0  0  2  1 A  0.2 A  0.1 A  one incorrect switching operation of 100 million switching operations (17 V, 5 mA)  R300 / B300  50 60 Hz
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  operational current of auxiliary contacts  • at 24 V  • at 125 V  • at 250 V  contact reliability of auxiliary contacts  contact rating of auxiliary contacts according to UL  operating frequency rated value  ampacity of the output relay at AC-15 at 250 V at 50/60 Hz  ampacity of the output relay at DC-13	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  RO  AgSnO2  0  1 A  0.2 A  0.1 A  one incorrect switching operation of 100 million switching operations (17 V, 5 mA)  R300 / B300  50 60 Hz  3 A
design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs required  • for short circuit protection of the NC contacts of the relay outputs required  design of the fuse link  • for short-circuit protection of the NO contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  • for short circuit protection of the NC contacts of the relay outputs safety-related required  Communication/ Protocol  protocol is supported IO-Link protocol  Auxiliary circuit  material of switching contacts  number of NC contacts for auxiliary contacts  number of NO contacts for auxiliary contacts  operational current of auxiliary contacts  operational current of auxiliary contacts at DC-13  • at 24 V  • at 125 V  • at 250 V  contact reliability of auxiliary contacts  contact rating of auxiliary contacts according to UL  operating frequency rated value  ampacity of the output relay at AC-15 at 250 V at 50/60 Hz  ampacity of the output relay at DC-13  • at 24 V	gL/gG: 6 A or MCB type C: 1 A  gL/gG: 2 A or MCB type C: 1 A  RO  AgSnO2  1 A  0.2 A  0.1 A  one incorrect switching operation of 100 million switching operations (17 V, 5 mA)  R300 / B300  50 60 Hz  3 A

continuous current of DIAZED fuse link of the output relay safety-related	2 A
Electromagnetic compatibility	
EMC emitted interference according to IEC 60947-1	Class B
conducted interference	
<ul> <li>due to burst according to IEC 61000-4-4</li> </ul>	2 kV (power ports), 1 kV (signal ports)
due to conductor-earth surge according to IEC 61000-4-5	2 kV (line to ground)
due to conductor-conductor surge according to IEC	1 kV (line to line)
61000-4-5	
field-based interference according to IEC 61000-4-3	10 V/m
electrostatic discharge according to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge
Galvanic isolation	
design of the electrical isolation	galvanic isolation
galvanic isolation	
<ul> <li>between input and output</li> </ul>	Yes
<ul> <li>between the outputs</li> </ul>	Yes
between the voltage supply and other circuits	No
Safety related data	
Safety Integrity Level (SIL) according to IEC 61508	1
SIL Claim Limit (subsystem) according to EN 62061	1
performance level (PL) according to EN ISO 13849-1	С
category according to EN ISO 13849-1	1
Safe failure fraction (SFF)	66 %
PFHD with high demand rate according to EN 62061	3.9E-7 1/h
hardware fault tolerance according to IEC 61508	0
Connections/ Terminals	
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	screw-type terminals
for auxiliary and control circuit	screw-type terminals
type of connectable conductor cross-sections	
• solid	1x (0.5 4.0 mm²), 2x (0.5 2.5 mm²)
finely stranded with core end processing	1x (0.5 4 mm²), 2x (0.5 2.5 mm²)
for AWG cables solid	1x (20 12), 2x (20 14)
connectable conductor cross-section	
• solid	0.5 4 mm²
finely stranded with core end processing	0.5 4 mm²
AWG number as coded connectable conductor cross section	
• solid	20 12
stranded	20 12
tightening torque with screw-type terminals	0.6 0.8 N·m
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm DIN rail
height	100 mm
width	22.5 mm
depth	90 mm
required spacing	
<ul><li>with side-by-side mounting</li></ul>	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
<ul> <li>for grounded parts</li> </ul>	
— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— at the side	0 mm
— downwards	0 mm
— downwards	

— forwards	0 mm
— backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-25 +60 °C
during storage	-40 +85 °C
during transport	-40 +85 °C
relative humidity during operation	70 %
explosion protection category for dust	Ex II (2) D [b1] [Ex h] [pyb] [tb] [mb] [kb] [sb] III C Db
explosion protection category for gas	Ex II (2) G [b1] [Ex h] [db] [eb] [pyb] [mb] [ob] [q] [kb] [sb] II C Gb
Certificates/ approvals	



**General Product Approval** 



Confirmation







**EMC** 



Explosion Protection Certificate Type Examination Certificate





Special Test Certificate

Marine / Shipping

other



Confirmation

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RS2600-1BA30

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RS2600-1BA30}$ 

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RS2600-1BA30


 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ EPLAN\ macros,\ ...)$ 

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RS2600-1BA30&lang=en

Characteristic: Derating

https://support.industry.siemens.com/cs/ww/en/ps/3RS2600-1BA30/manual

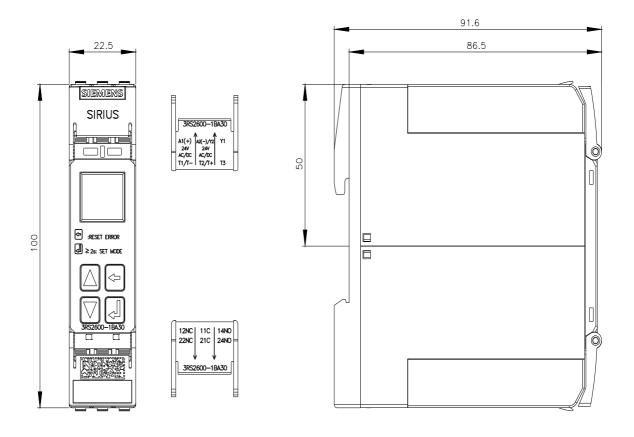

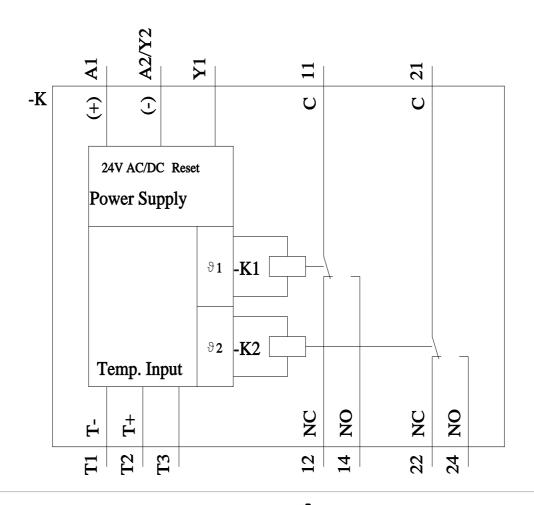

last modified: 11/21/2022 🖸

