# SIEMENS

## Data sheet

## 3RW30 38-1BB04



SIRIUS SOFT STARTER, SIZE S2, 72A, 37KW/400V, 40 DEGREES, 200-480V AC, 24V AC/DC, SCREW TERMINALS

General technical data:	
product brand name	SIRIUS
Product feature	
<ul> <li>integrated bypass contact system</li> </ul>	Yes
Thyristors	Yes
Product function	
<ul> <li>Intrinsic device protection</li> </ul>	No
<ul> <li>motor overload protection</li> </ul>	No
<ul> <li>Evaluation of thermistor motor protection</li> </ul>	No
External reset	No
<ul> <li>Adjustable current limitation</li> </ul>	No
• inside-delta circuit	No
Product component Motor brake output	No
Equipment marking acc. to DIN EN 61346-2	Q
Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750	G

Power Electronics:			
	soft starters for standard applications		
А	72		
А	62		
А	60		
	А		

	14/	22.022
— at standard circuit at 40 °C Rated value	W	22 000
• at 400 V		
— at standard circuit at 40 °C Rated value	W	37 000
yielded mechanical performance [hp] for three-phase	metric	20
AC motor at 200/208 V at standard circuit at 50 °C	hp	
Rated value		
Operating frequency Rated value	Hz	50 60
Relative negative tolerance of the operating	%	-10
frequency		
Relative positive tolerance of the operating frequency	%	10
Operating voltage at standard circuit Rated value	V	200 480
Relative negative tolerance of the operating voltage	%	-15
at standard circuit		
Relative positive tolerance of the operating voltage at	%	10
standard circuit		
Minimum load in % of I_M	%	10
Continuous operating current in % of I_e at 40 °C	%	115
Active power loss at operating current at 40 °C during	W	15
operation typical		
Control electronics:		
Type of voltage of the control supply voltage		AC/DC
Control supply voltage frequency 1 Rated value	Hz	50
Control supply voltage frequency 2 Rated value	Hz	60
Relative negative tolerance of the control supply	%	-10
voltage frequency	,,,	
Relative positive tolerance of the control supply	%	10
voltage frequency		
Control supply voltage 1 with AC	-	
<ul> <li>at 50 Hz Rated value</li> </ul>	V	24
● at 60 Hz Rated value	V	24
Relative negative tolerance of the control supply	%	-10
voltage with AC at 60 Hz	70	
Relative positive tolerance of the control supply	%	10
voltage with AC at 60 Hz		
Control supply voltage 1 for DC Rated value	V	24
Relative negative tolerance of the control supply	%	-10
voltage for DC		
Relative positive tolerance of the control supply	%	10
voltage for DC		
Display version for fault signal		red
Mechanical data:		
		\$2
Size of engine control device	mm	S2
	mm	S2 55 160

Depth	mm	170
Mounting type		screw and snap-on mounting
mounting position		With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° tiltable to the front and back
Required spacing with side-by-side mounting		
• upwards	mm	60
• at the side	mm	30
downwards	mm	40
Installation altitude at height above sea level	m	5 000
Cable length maximum	m	300
Number of poles for main current circuit		3

## Connections/ Terminals:

Type of electrical connection	
<ul> <li>for main current circuit</li> </ul>	screw-type terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>	screw-type terminals
Number of NC contacts for auxiliary contacts	0
Number of NO contacts for auxiliary contacts	1
Number of CO contacts for auxiliary contacts	0
Type of connectable conductor cross-section for main contacts for box terminal using the front clamping point	
• solid	2x (1.5 16 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	0.75 25 mm²
• stranded	0.75 35 mm²
Type of connectable conductor cross-section for main contacts for box terminal using the back clamping point	
• solid	2x (1.5 16 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	1.5 25 mm²
• stranded	1.5 35 mm²
Type of connectable conductor cross-section for main contacts for box terminal using both clamping points	
• solid	2x (1.5 16 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1.5 16 mm²)
• stranded	2x (1.5 25 mm²)
Type of connectable conductor cross-section for AWG conductors for main contacts for box terminal	
<ul> <li>using the back clamping point</li> </ul>	16 2
<ul> <li>using the front clamping point</li> </ul>	18 2
<ul> <li>using both clamping points</li> </ul>	2x (16 2)

Type of connectable conductor cross-section for auxiliary contacts				
• solid		2x (0.5 2	2.5 mm²)	
<ul> <li>finely stranded with core end processing</li> </ul>		2x (0.5 ?	1.5 mm²)	
Type of connectable conductor cross-section for AWG conductors	_			
<ul> <li>for auxiliary contacts</li> </ul>		2x (20 1	4)	
<ul> <li>for auxiliary contacts finely stranded with core end processing</li> </ul>		2x (20 1	6)	
mbient conditions:				
Ambient temperature				
<ul> <li>during operation</li> </ul>	°C	-25 +60		
<ul> <li>during storage</li> </ul>	°C	-40 +80		
Derating temperature	°C	40		
Protection class IP	_	IP00		
ertificates/ approvals:				
General Product Approval			EMC	Test Certificates
	ł	<b>HC</b>	С-тіск	<u>Type Test</u> Certificates/Test <u>Report</u>
other Environmental other Declaration				
Environmental other Declaration	on of			

UL/CSA ratings:		
yielded mechanical performance [hp] for three-phase		
AC motor		
● at 220/230 V		
— at standard circuit at 50 °C Rated value	metric hp	20
● at 460/480 V		
— at standard circuit at 50 °C Rated value	metric hp	40
Contact rating of the auxiliary contacts acc. to UL		B300 / R300

#### urther information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

#### Industry Mall (Online ordering system) http://www.siemens.com/industrymall


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW30381BB04


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RW30381BB04/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/index.aspx?attlD9=3RW30381BB04&lang=en







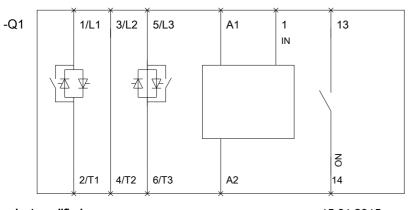

last modified:

15.01.2015