

STECA SOLSUM

0606 | 0808 | 1010

The Steca Solsum-Line continues the huge success of one of the most used SHS controllers. With a power range of up to 10 A at automatically recognized 12 V or 24 V it fits to a system sizes of maximum 240 W.

Full circuit board protection with LED display for simple recognition of battery status. Various connections make it possible to connect easily to solar panels, battery and load. The Steca Solsum works on PWM as a low loss series controller.

BASIC



Product features

- Serial topology with MOSFETs
- Automatic detection of voltage
- Voltage regulation
- PWM control
- Multistage charging technology
- Current compensated load disconnection
- Automatic load reconnection
- Temperature compensation
- Negative earthing of one or positive earthing of several terminals possible
- Monthly equalisation charge

Electronic protection functions

- Overcharge protection
- Deep discharge protection
- Reverse polarity protection of module (≤ 36 V), load and battery
- Automatic electronic fuse
- Short circuit protection of load and module
- Overvoltage protection at module input
- Open circuit protection without battery
- Reverse current protection at night
- Overtemperature and overload protection
- Load disconnection on battery overvoltage

Displays

- Multifunction LED display
- Multi-coloured LED
- 4 LEDs show operating states
~ for operation, state of charge, fault messages

Options

- Evening or night light function pre-set in the factory or adjustable via Steca PA RC 100
- Parameterisation of function values via Steca PA RC 100


Certificates

- Compliant with European Standards (CE)
- RoHS compliant
- Made in EU
- Manufactured according to ISO 9001 and ISO 14001

Steca accessories

- Remote control Steca PA RC100

6 A...10 A

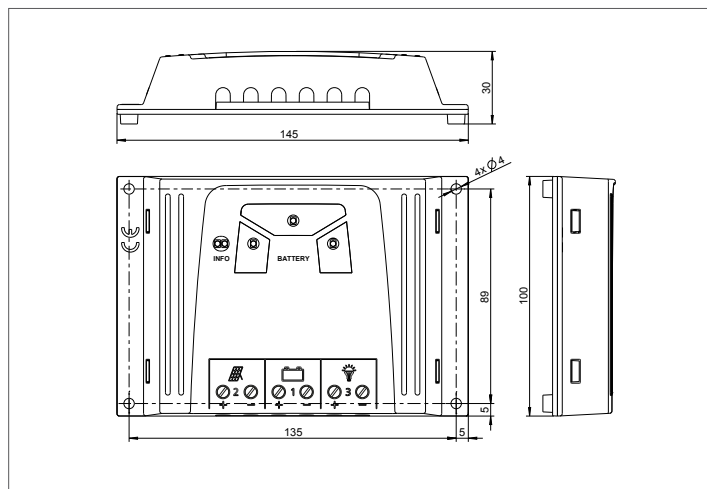

	0606	0808	1010
Characterisation of the operating performance			
System voltage	12 V (24 V)		
Own consumption	< 4 mA		
DC input			
Open circuit voltage solar module (at minimum operating temperature)	< 47 V		
Module current	6 A	8 A	10 A
DC output			
Load current**	6 A	8 A	10 A
Reconnection voltage (LVR)*	12.4 V ... 12.7 V (24.8 V ... 25.4 V)		
Deep discharge protection (LVD)*	11.2 V ... 11.6 V (22.4 V ... 23.2 V)		
Battery			
End of charge voltage*	13.9 V (27.8 V)		
Boost charge voltage*	14.4 V (28.8 V)		
Set battery type*	gel		
Operating conditions			
Ambient temperature	-25 °C ... +50 °C		
Fitting and construction			
Terminal (fine / single wire)	4 mm ² / 6 mm ² - AWG 12 / 9		
Degree of protection	IP 31		
Dimensions (X x Y x Z)	145 x 100 x 30 mm		
Weight	approx. 150 g		

Technical data at 25 °C / 77 °F

* adjustable via Steca PA RC100

** Inverters must not be connected to the load output.