


Air Slide Table

Series MXQ

ø6, ø8, ø12, ø16, ø20, ø25

How to Order

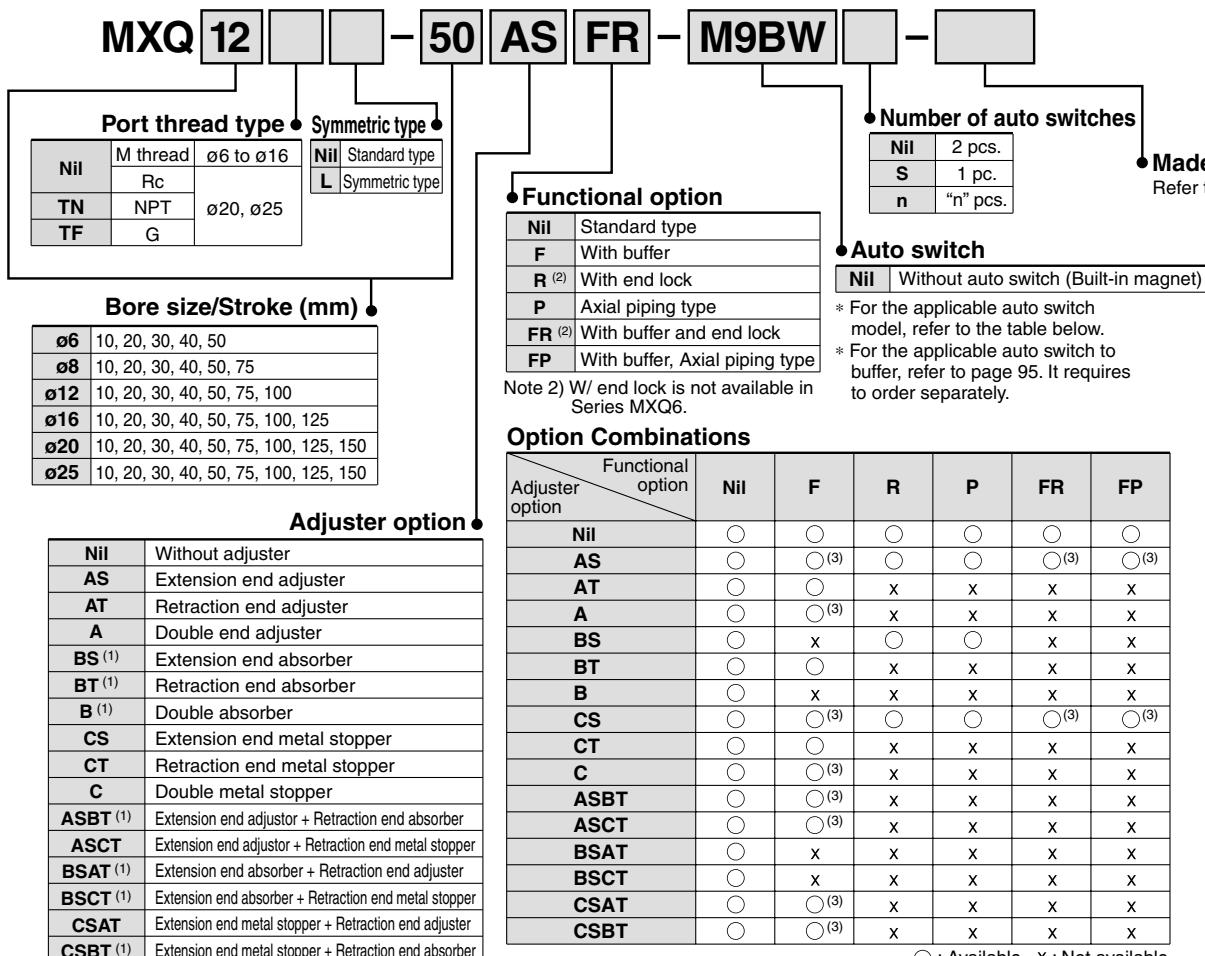

Applicable Auto Switch

Refer to pages 1719 to 1827 for the detailed specifications of auto switches.

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model	Lead wire length (m)	Pre-wired connector	Applicable load				
					DC	AC								
Solid state switch	Diagnostic indication (2-color indication)	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	M9NV	M9N	●	●	●	○	○	IC circuit
				3-wire (PNP)					●	●	●	○	○	
				2-wire					●	●	●	○	○	
				3-wire (NPN)	24 V	12 V	M9BV	M9B	●	●	●	○	○	
				3-wire (PNP)					●	●	●	○	○	
				2-wire					●	●	●	○	○	
Reed switch		Grommet	Yes	3-wire (NPN equivalent)	24 V	5 V	A96V	A96	●	—	●	—	—	IC circuit
				2-wire		12 V			●	—	●	—	—	
			No	100 V	100 V or less	A93V	A93	●	—	●	—	—	Relay, PLC	
				100 V or less				●	—	●	—	—		

* Lead wire length symbols: 0.5 m Nil (Example) M9NW
1 m M (Example) M9NWM
3 m L (Example) M9NWL
5 m Z (Example) M9NWZ


* Solid state auto switches marked with "○" are produced upon receipt of order.

* Since there are other applicable auto switches than listed, refer to page 128 for details.
* For details about auto switches with pre-wired connector, refer to pages 1784 and 1785.
* Auto switches are shipped together (not assembled).

Series MXQ

Dimensions: MXQ8

Basic style

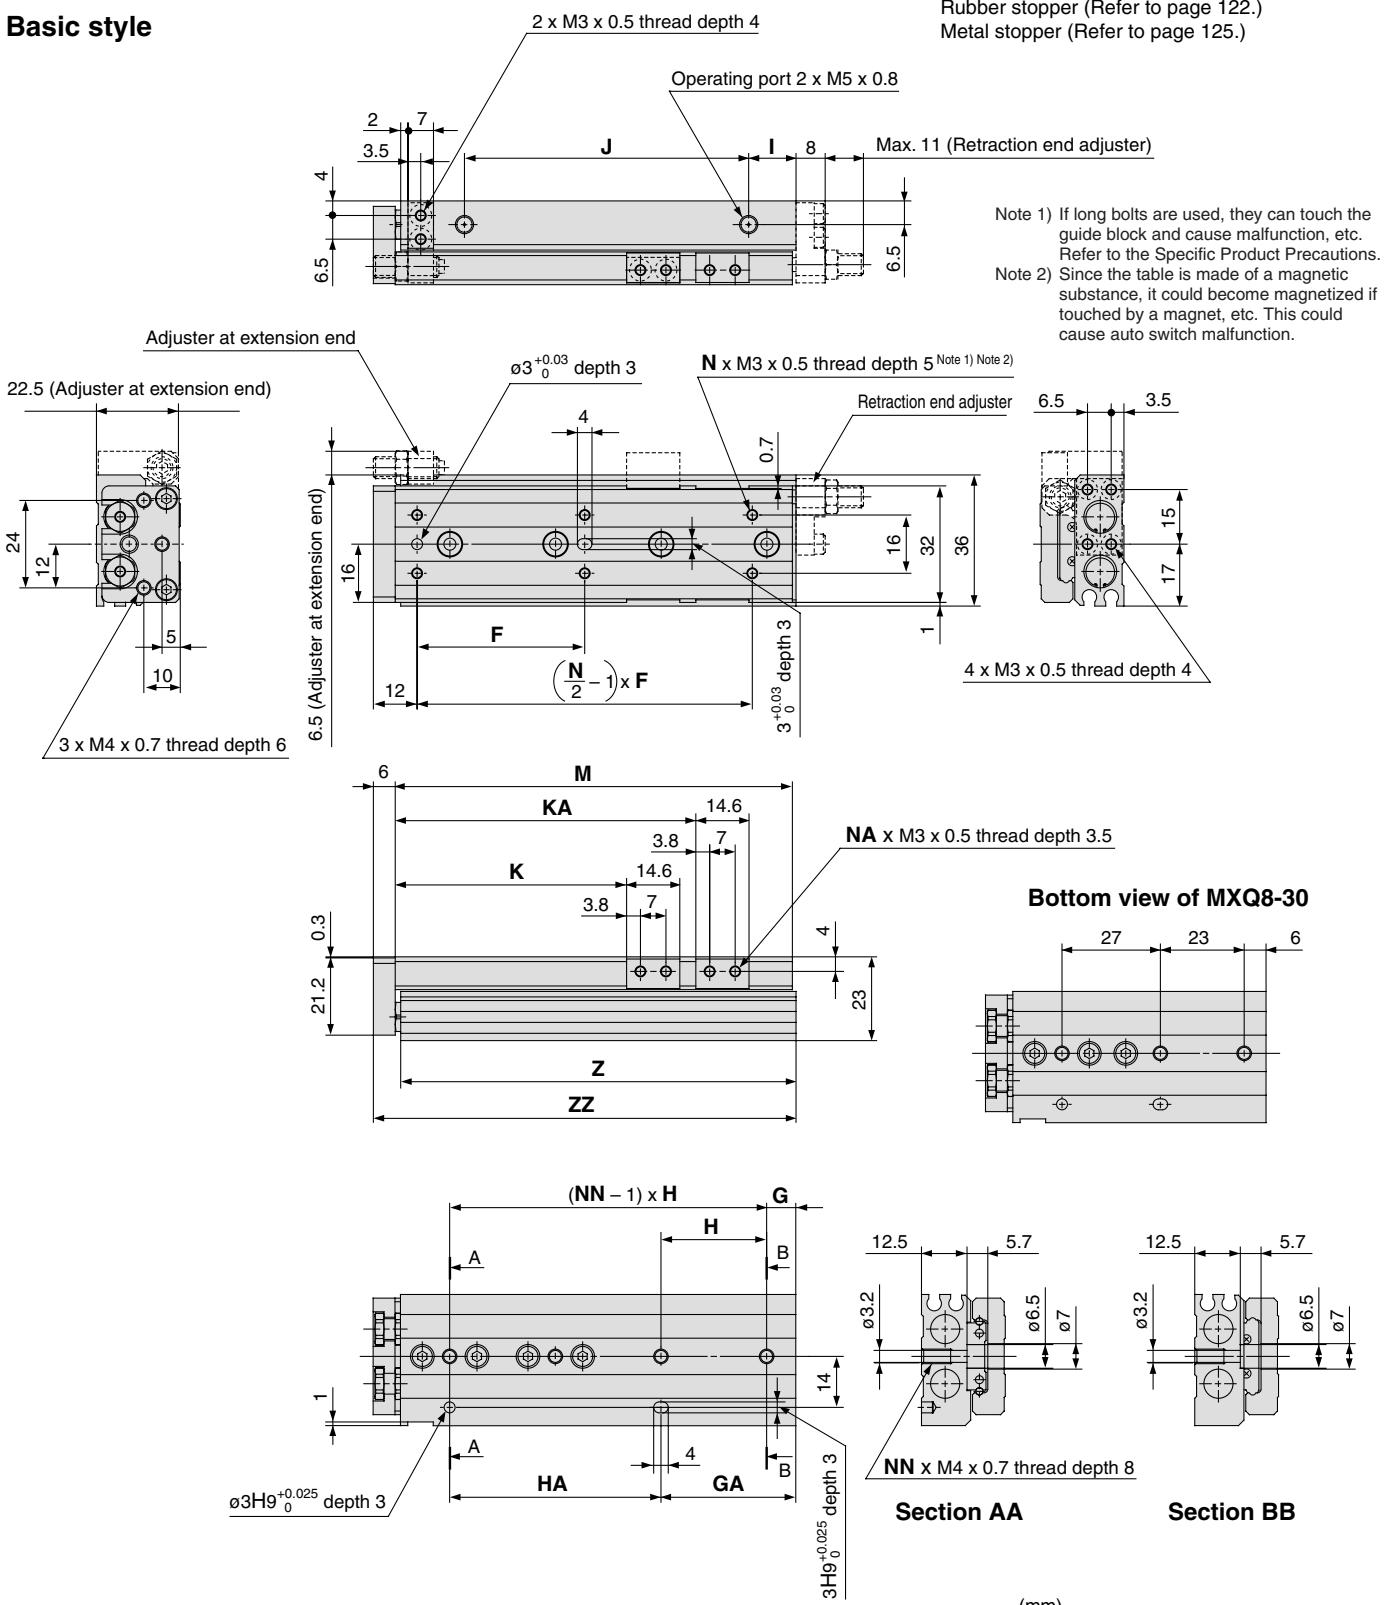

Note) Refer to the bottom view of MXQ8-30.

Model	F	N	G	H	NN	GA	HA	I	J	K	KA	NA	M	Z	ZZ	(mm)
MXQ8-10	25	4	7	25	2	13	19	11	17	23.5	—	4	46	45.5	53	
MXQ8-20	25	4	14	28	2	14	28	10	28	33.5	—	4	56	55.5	63	
MXQ8-30	26	6	—	—	3	29	27	12	40	43.5	—	4	70	69.5	77	
MXQ8-40	32	6	8	31	3	39	31	14	52	53.5	—	4	84	83.5	91	
MXQ8-50	46	6	8	29	4	37	58	13	78	63.5	82.5	8	109	108.5	116	
MXQ8-75	50	6	31	30	4	61	60	12	105	88.5	112.5	8	135	134.5	142	