



ASR-6000 Series

4.5/6/9/12/13.5/18/24/30/36 kVA High-Performance AC/DC Power Supply

FEATURES


- Adopts Third-generation Semiconductor Silicon Carbide (SiC) Technology to Create a 4 U 6 kVA High-performance AC/DC Power Source with High Power Density
- AC Input Supports Single-phase and Three-phase, Phase Voltage 200 V to 240 V \pm 10% (Delta or Y Connection)*
- 10 output Modes: Including External Input Signal Frequency and Mains Synchronization(SYNC), External Voltage Controlled Internal Amplifier Output (VCA)
- Multi-channel Output Function
- Supports AC 1P2W, 1P3W, 3P4W Output
- AC Maximum Output Phase Voltage: 350 Vrms Line Voltage: 700 Vrms
- AC Balanced and Unbalanced Three-phase, Phase Failure Output Functions
- Programmable Output Impedance Adjustment*
- Dual-channel Voltage/Current Output Monitoring Function
- Voltage Output Rise Time Can be Adjusted in Three Ranges*
- Supports Sequence Editing and Emulation Output Mode
- Powerful Arbitrary Waveform Editing and Output Function, Built-in Over 253 Types of Arbitrary Waveform Outputs
- Advanced Web Server Control to Support Data Acquisition and Data Logger Both Functions
- 100th Order Harmonic Measurement Function
- Support Parallel Connection Type Up to 36 kVA Maximum
- Interfaces: RS-232C, USB, LAN; Opt: CAN BUS, DeviceNet, GPIB

* Stand-alone models only.

From the very moment Alpha Go defeated the human chess champion with its ultra-high-speed computing capability, artificial intelligence technology (AI) has developed rapidly around the world. Today, servers with advanced AI functions process tremendous amounts of data under the high-speed computing architecture of 2 CPUs + 8 GPUs. servers require a huge amount of power to maintain high-speed computing! In order to meet this demand, the power, density and efficiency of server power supplies have been greatly improved. High-power server power modules require high-efficiency conversion and saving of power consumption. AC single-phase input, HVDC 400 V input or increased DC voltage output designs can be utilized to achieve this purpose. In order to ensure power stability when high-power servers are operating, power modules with hot-swappable redundant power supply specifications (such as CRPS) have been widely applied in server racks. Power modules with redundant functions require testing of multiple power modules at a time to ensure that all modules can maintain normal operation during high power output. Due to the rapid changes in the development of server power supplies GW Insteek developed the brand new flagship model ASR-6000 series to meet customer needs. ASR-6000 series has two models - ASR-6450 AC/DC 4.5 kVA and ASR-6600 series AC/DC 6 kVA.


ASR-6000 series is the first stand-alone unit from GW Insteek that supports AC single/three-phase input and output, and has rated DC power output. The series employs third-generation semiconductor silicon carbide (SiC) technology to create a 4U 6 kVA high power density and high-performance AC/DC power source ASR-6000 series has the ability to emulate more diverse power environment changes, such as balanced three-phase and unbalanced three-phase, phase failure, and features multi-channel output function in three-phase output mode, programmable output impedance adjustment, and up to tens of thousands of arbitrary waveform outputs. The invincible launch of GW Insteek flagship model ASR-6000 series demonstrates that GW Insteek can provide a complete test solution for high-power AC sources. ASR-6000 series is the MVP of GW Insteek power sources.

PANEL INTRODUCTION

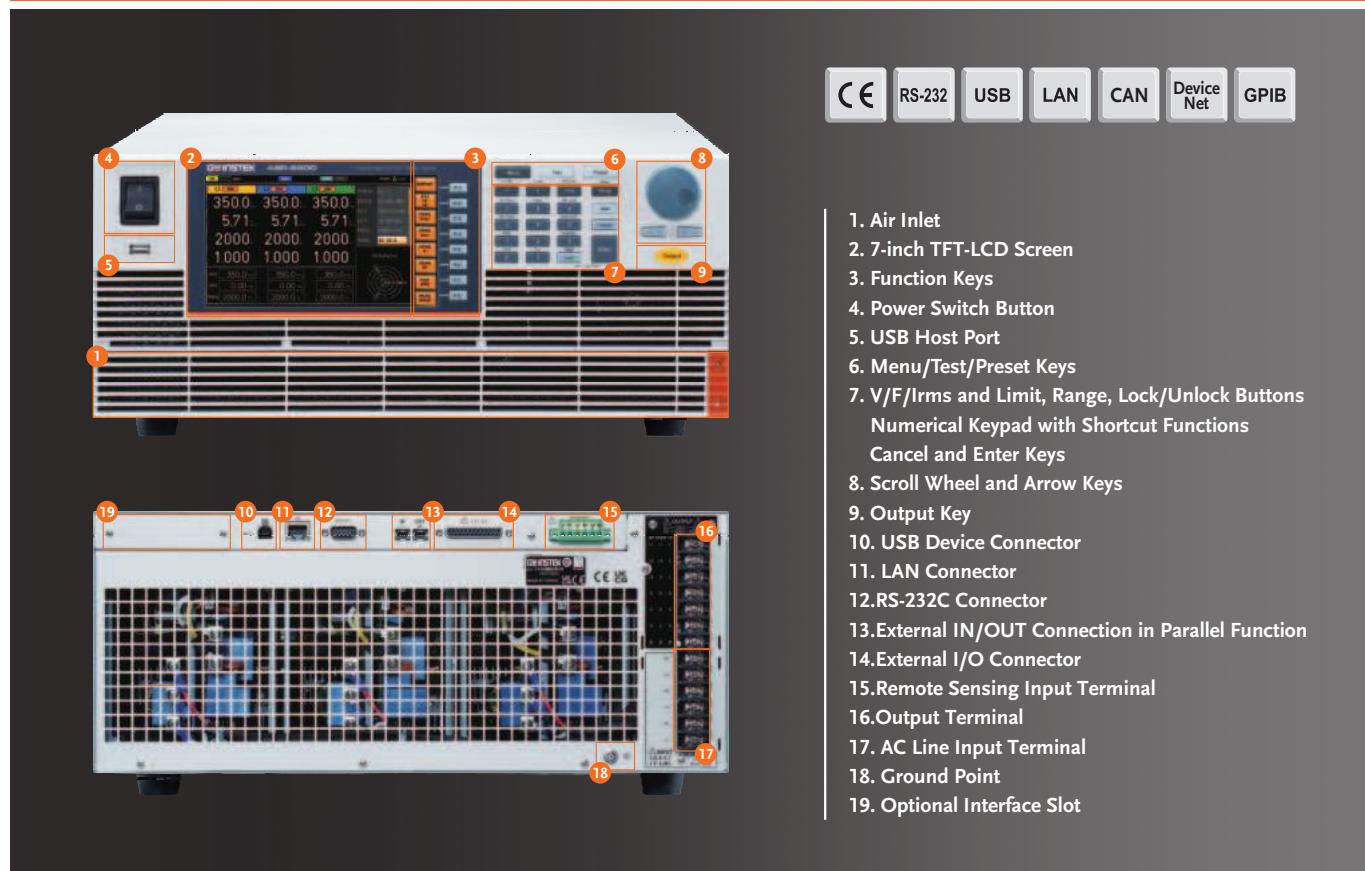


| Model | ASR-6450 | ASR-6600 | ASR-6450-09 | ASR-6450-13.5 | ASR-6600-12 | ASR-6600-18 | ASR-6600-24 | ASR-6600-30 | ASR-6600-36 |
|--------------------|--|---|---|--|--|--|---|---|---|
| AC Input Voltage | Single/Three Phase 200 Vac to 240 Vac $\pm 10\%$ | | | | 200 Vac to 240 Vac $\pm 10\%$ (Phase Voltage) / 380 to 415 Vac $\pm 10\%$ (Line Voltage) | | | | |
| AC Output Voltage | | | | | Phase Voltage 0 V to 350.0 V / Line Voltage 0 V to 700 V | | | | |
| AC Output Current | 1P2W 45 A/22.5 A 1P3W, 3P4W 15 A/7.5 A | 1P2W 60 A/30 A 1P3W, 3P4W 20 A/10 A | 1P2W 90 A/45 A 1P3W, 3P4W 30 A/15 A | 1P2W 135 A/67.5 A 1P3W, 3P4W 45 A/22.5 A | 1P2W 120 A/60 A 1P3W, 3P4W 40 A/20 A | 1P2W 180 A/90 A 1P3W, 3P4W 60 A/30 A | 1P2W 240 A/120 A 1P3W, 3P4W 80 A/40 A | 1P2W, 300 A/150 A 1P3W, 3P4W 100 A/50 A | 1P2W, 360 A/180 A 1P3W, 3P4W 120 A/60 A |
| Output Frequency | 2000 Hz | 2000 Hz | 1000 Hz | 1000 Hz | 1000 Hz | 1000 Hz | 550 Hz | 550 Hz | 550 Hz |
| AC Output Capacity | 4.5 kVA | 6 kVA | 9 kVA | 13.5 kVA | 12 kVA | 18 kVA | 24 kVA | 30 kVA | 36 kVA |
| DC Output Voltage | | | | | -250.0 V to +250.0 V/-500.0 V to +500.0 V | | | | |
| DC Output Capacity | 4.5 kW | 6 kW | 9 kW | 13.5 kW | 12 kW | 18 kW | 24 kW | 30 kW | 36 kW |

A. SINGLE UNIT PROVIDES AC SINGLE/THREE-PHASE INPUT FUNCTION



AC One-phase Input



AC Three-phase Input
(Delta Connection)



AC Three-phase Input
(Y Connection)

The ASR-6000 series is GW Insteek's first programmable AC/DC power source that supports AC single/three-phase input.

AC three-phase input supports delta (Delta) and star (Y) wiring methods

Advantages:

a. ASR-6000 can use mains in most countries around the world (ex. Mainland China, Southeast Asia, India, Europe..) AC single-phase 220 V input can help test software development engineers work with the ASR-6000 on mains in the office. No additional three-phase power source is required.


b. ASR-6000 can be used immediately in various regions around the world and is not affected by differences in power grids in different countries.

Note: 1. The AC input three-phase Y connection method must be connected to the N wire, otherwise the ASR-6000 cannot be turned on.
2. ASR-6000 AC voltage input range AC 200 V ~ AC 240 V.

B. 10 OUTPUT MODES



ASR-6000 Has 10 Output Modes

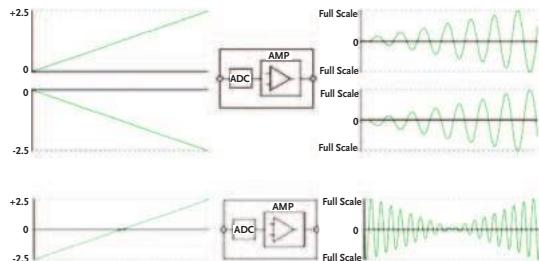

AC-VCA Output Mode

| Output Phase | Output Mode | Signal Source | | | | |
|--------------|-------------|---------------|-----------|-----------|------------|--------|
| | | INT | EXT | ADD | SYNC | VCA |
| 1P | AC+DC | AC+DC-INT | AC+DC-EXT | AC+DC-ADD | AC+DC-Sync | N/A |
| | AC | AC-INT | AC-EXT | AC-ADD | AC-Sync | AC-VCA |
| | DC | DC-INT | N/A | N/A | N/A | N/A |
| 1P3W | AC+DC | AC+DC-INT | AC+DC-EXT | AC+DC-ADD | AC+DC-Sync | N/A |
| | AC | AC-INT | AC-EXT | AC-ADD | AC-Sync | AC-VCA |
| | DC | DC-INT | N/A | N/A | N/A | N/A |
| 3P | AC+DC | AC+DC-INT | AC+DC-EXT | AC+DC-ADD | AC+DC-Sync | N/A |
| | AC | AC-INT | AC-EXT | AC-ADD | AC-Sync | AC-VCA |
| | DC | DC-INT | N/A | N/A | N/A | N/A |

- AC+DC-INT AC & DC Internal output
- AC-INT AC Internal output
- DC-INT DC Internal output
- AC+DC-EXT AC & DC External output
- AC-EXT AC External output
- AC+DC-ADD AC & DC Additional output
- AC-ADD AC Additional output
- AC+DC-Sync AC & DC Synchronal output
- AC-Sync AC Synchronal output
- AC-VCA AC Voltage Control Amplifier output

A high-performance AC power source = amplifier + signal source
It has: internal output + external input signal to control internal output + amplify external input signal. and output, and other diversified output functions.
ASR-6000 has up to 10 output modes, including :

1. Internal output (INT)
2. External input controls internal output (EXT)
3. Sum output of external and internal signal sources (ADD)
4. Mains frequency synchronous output (SYNC)
5. External DC signal controls internal AC amplitude (VCA)

C. AC SINGLE/THREE-PHASE OUTPUT + MULTI-CHANNEL OUTPUT FUNCTION



The ASR-6000 series has diverse output functions, including three modes: 1P2W, 1P3W and 3P4W. The maximum output for phase voltage is 350 Vrms and the maximum output for line voltage is 700 Vrms.

In AC three-phase output (3P4W) mode, each phase supports independent output settings. Taking ASR-6600 as an example, The maximum output of each phase reaches 2 kVA, supporting power supply testing of up to three DUTs to meet the needs of server power modules. Testing requirements for high-power AC power products such as electric vehicle chargers and uninterruptible power supply systems. independent output settings. Taking ASR-6600 as an example, The maximum output of each phase reaches 2 kVA, supporting power supply testing of up to three DUTs to meet the needs of server power modules. Testing requirements for high-power AC power products such as electric vehicle chargers and uninterruptible power supply systems.

D. AC BALANCED/UNBALANCED THREE-PHASE OUTPUT MODES



AC Balanced Three-phase



AC Unbalanced Three-phase

The ASR-6000 series has unbalanced and balanced three-phase output modes. In the AC three-phase output mode, users can set the phase angles of L1, L2 and L3 for control.

Main applications: Three-phase input power supply products, when emulating unbalanced three-phase input and phase loss, the ability of three-phase power input products to restore balanced three-phase.


E. OUTPUT IMPEDANCE ADJUSTMENT FUNCTION

ASR-6000 has an output impedance adjustment function, which is mainly used to change the output inductance value and output impedance value of each phase to emulate the output voltage drop of each phase due to line loss. The adjustable range of the output impedance of ASR-6000 is as follows:

| | |
|------------------------------|--------------------|
| L1, L2, L3 Output Inductance | 0.0 ~ 2000 μ H |
| L1, L2, L3 Output Resistance | 0.0 ~ 1 Ω |


Note: This function only supports stand-alone applications. This function is automatically turned off in external parallel connection.

F. VOLTAGE AND CURRENT OUTPUT MONITORING FUNCTIONS

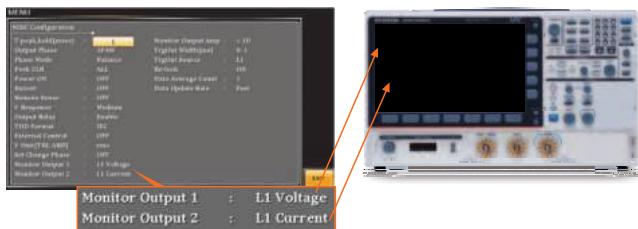

ASR-6000 provides dual-channel voltage and current monitoring, allowing instant output of voltage and current signals of each phase to an oscilloscope for measurement.

G. OUTPUT VOLTAGE RISE TIME IS ADJUSTABLE

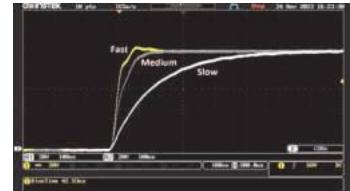

In order to meet the test requirements of different DUT output voltages, it is necessary to adjust the rise time of different output voltages. The ASR-6000 offers users up to three adjustable settings: typical values are fast (50 microseconds), medium (100 microseconds) and slow (300 microseconds). ASR-6000 is initially set to medium speed. Note: When using 1P2W output, impedance adjustment or external parallel connection, the fast range setting will be automatically turned off. Application: It can output high-speed arbitrary waveforms to emulate various changes in the power system caused by transient high-speed rising voltage, etc.

H. ADVANCED WEB SERVER CONTROL FEATURES




ASR-6000 provides a full range of web control functions, including:

- * View system and information, and network configuration
- * Monitor measurements

- * Set/Operate ASR-6000
- * Sequence Function/Simulate Function/Edit Waveform
- * Data logger function

I. DIVERSE WAVEFORM OUTPUT FUNCTION

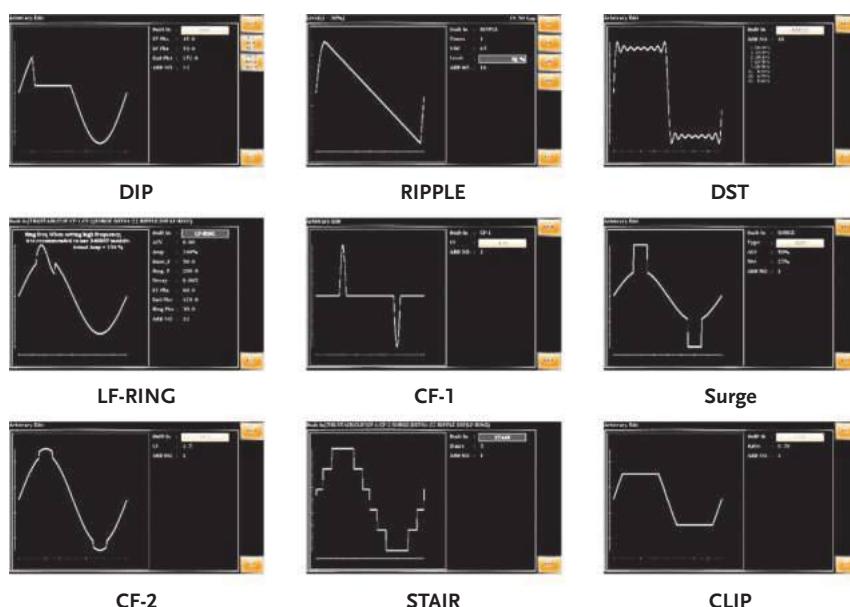

ASR-6000 provides more than 40 built-in waveforms, including: TRI, STAIR, CLIP, CF-1, CF-2, SURGE, DST01-22, RIPPLE, DIP, LF-RING. Each waveform also provides a change setting function, which can modulate thousands of combined waveforms and quickly emulate different AC output environments.

Users can adjust the required waveform type through the panel (the screen is displayed simultaneously), then load it into the ARB 1 to 16 waveform register through the access step, and return to the main menu output mode to perform ARB Waveform output. Users can also edit waveform through ASR-6000 software and then import it into ASR-6000 for execution.

SPECIFICATIONS

| Model | ASR-6450 | | ASR-6600 | | | |
|---|---|---|--|---|--|--|
| Input Ratings | | | | | | |
| Power type | Single-phase ; Three-phase, Delta or Y connection selectable | | | | | |
| Voltage range ¹ | 200 Vac to 240 Vac $\pm 10\%$ phase voltage (Delta: L-L, Y: L-N) | | | | | |
| Frequency range | 47 Hz to 63 Hz | | | | | |
| Power factor ² | 0.95 or higher (typ.) | | | | | |
| Efficiency ³ | 80 % or higher | | | | | |
| Maximum power consumption | 6 kVA or lower | | 8 kVA or lower | | | |
| AC Output | | | | | | |
| Multi-phase output | Single-phase output | Polyphase output | Single-phase output | Polyphase output | | |
| Output capacity | 4.5 kVA | 1P3W: 3 kVA ; 3P4W: 4.5 kVA | 6 kVA | 1P3W: 4 kVA ; 3P4W: 6 kVA | | |
| Mode | 1P2W | 1P3W ; 3P4W (Y-connection) | 1P2W | 1P3W ; 3P4W (Y-connection) | | |
| Setting mode ⁴ | --- | Independ, Balanced | --- | Independ, Balanced | | |
| Phase voltage | Setting Range ⁴ | 0.00 V to 175.0 V / 0.0 V to 350.0 V (sine and square wave), Setting Resolution: 0.01 V / 0.1 V | | | | |
| | | 0.00 Vpp to 500.0 Vpp / 0.00 Vpp to 1000 Vpp (triangle and arbitrary wave), Setting Resolution: 0.01 Vpp / 0.1 Vpp / 1 Vpp | | | | |
| | | $\pm(0.3\% \text{ of set} + 0.5\text{ V} / 1\text{ V})$ | | | | |
| Line voltage setting range ⁵ | --- | 1P3W: 0.00 V to 350.0 V / 0.00 V to 700.0 V 3P4W: 0.00 V to 303.1 V / 0.00 V to 606.2 V (sine wave only) Setting Resolution: 0.01 V / 0.1 V | --- | 1P3W: 0.00 V to 350.0 V / 0.00 V to 700.0 V 3P4W: 0.00 V to 303.1 V / 0.00 V to 606.2 V (sine wave only) Setting Resolution: 0.01 V / 0.1 V | | |
| Maximum current ⁶ | 45 A / 22.5 A | 15 A / 7.5 A | 60 A / 30 A | 20 A / 10 A | | |
| Maximum peak current ⁷ | Four times of the maximum RMS current | | | | | |
| Load power factor ⁸ | 0 to 1 (leading phase or lagging phase, 45 Hz to 65 Hz) | | | | | |
| Frequency | Setting range | AC Mode: 15.00 Hz to 2000.0 Hz, AC+DC Mode: 1.00 Hz to 2000.0 Hz, Setting resolution: 0.01 Hz / 0.1 Hz | | | | |
| | | Accuracy ⁹ | | | | |
| | | $\pm 0.01\% \text{ of set}$ | | | | |
| Setting range of the phase angle ¹⁰ | | Setting Resolution: 0.1° | 3P4W: L2 phase: 0° to 359.9° L3 phase: 0° to 359.9° Setting Resolution: 0.1° | | | |
| Phase angle accuracy ¹¹ | | | 45 Hz to 65 Hz: $\pm 1.0^\circ$ 15 Hz to 2000 Hz: $\pm 2.0^\circ$ | 45 Hz to 65 Hz: $\pm 1.0^\circ$ 15 Hz to 2000 Hz: $\pm 2.0^\circ$ | | |
| DC offset ¹² | $\pm 20\text{ mV}$ (typ.) | | | | | |
| DC Output (Only Single Phase Output) | | | | | | |
| Output capacity | 4.5 kW | | 6 kW | | | |
| Mode | Floating output, the N terminal can be grounded | | | | | |
| Voltage | Setting Range | -250.0 V to +250.0 V / -500.0 V to +500.0 V, Setting Resolution: 0.01 V / 0.1 V | | | | |
| | | Accuracy ¹³ $\pm(0.3\% \text{ of set} + 0.3\text{ V} / 0.6\text{ V})$ | | | | |
| Maximum current ¹⁴ | 45 A / 22.5 A | 60 A / 30 A | | | | |
| Maximum peak current ¹⁵ | Four times of the maximum current | | | | | |
| Output Stability, Total Harmonic Distortion, Output Voltage Rising Time and Ripple Noise | | | | | | |
| Line regulation | $\pm 0.1\%$ or less (Phase voltage) | | | | | |
| Load regulation ¹⁶ | $\pm 0.1\text{ V} / \pm 0.2\text{ V}$, @DC (only single-phase output) $\pm 0.1\text{ V} / \pm 0.2\text{ V}$, @45 Hz to 65 Hz (phase voltage, 0 to 100%, via output terminal) $\pm 0.5\text{ V} / \pm 1.0\text{ V}$, @all other frequencies (phase voltage, 0 to 100%, via output terminal) | | | | | |
| Distortion of Output ¹⁷ | <0.3 % @1Hz to 100Hz, <0.5 % @100.1 Hz to 500 Hz, <1 % @500.1 Hz to 2000 Hz | | | | | |
| Output voltage response time ¹⁸ | Fast: 50 μs (typ.) ; Middle: 100 μs (typ.) ; Slow: 300 μs (typ.) | | | | | |
| Ripple noise ¹⁹ | 0.5 Vrms / 1 Vrms (TYP) | | | | | |

¹ Y connection is three-phase, five-wire, Delta connection is three-phase, four-wire.

² In the case of AC-INT mode, the rate output voltage, resistance load at maximum output current, 45 Hz to 65 Hz and sine wave output only.

³ Can be only set in 3P4W mode.

⁴ For phase voltage setting in polyphase output. In balance mode all phase are collectively set and in unbalance mode each phases are individually set.

⁵ For an output voltage of 10 V to 175 V / 20 V to 350 V, sine wave, an output frequency of 45 Hz to 65 Hz, no load, DC voltage setting 0V (AC+DC mode) and $23^\circ\text{C} \pm 5^\circ\text{C}$. For phase voltage setting in the polyphase output.

⁶ Line voltage output can be set in balance mode.

⁷ If the output voltage is higher than rated value, this is limited to satisfy the power capacity. If there is the DC superimposition, the active current of AC+DC satisfies the maximum current. In the case of 40 Hz or lower or 400 Hz or higher, and that the ambient temperature is 40 degree or higher, the maximum current may decrease.

⁸ With respect to the capacitor-input rectifying load. Limited by the maximum current.

⁹ External power injection or regeneration which is over short reverse power flow capacity is not available.

¹⁰ For 45 Hz to 65 Hz, the rated output voltage, no load and the resistance load for the maximum current, and the operating temperature range.

¹¹ L1, L2 and L3 phase can be set independently in independent mode of the polyphase output.

¹² Can be set only with independent mode in polyphase output.

¹³ For an output voltage of 50V or higher, sine wave, same load and voltage condition for all phase.

¹⁴ In the case of 0V, 23°C ± 5°C

¹⁵ For an output voltage of -250 V to -10 V, -10 V to +250 V to -20 V, +20 V to +500 V, no load, AC voltage set to 0V (AC+DC mode) and $23^\circ\text{C} \pm 5^\circ\text{C}$

¹⁶ If the output voltage is higher than rated value, this is limited to satisfy the power capacity. If there is the AC superimposition, the active current of AC+DC satisfies the maximum current. And the ambient temperature is 40 degree or higher, the maximum current may decrease.

¹⁷ Instantaneous within 3 ms, limited by the maximum current at rated output voltage.

¹⁸ For an output voltage of 75 V to 175 V / 150 V to 350 V, a load power factor of 1, stepwise change from an output current of 0 A to maximum current (or its reverse), using the output terminal on the rear panel.

¹⁹ 50 % or higher of the rated output voltage, the maximum current or lower, AC and AC+DC modes, THD+N. For the polyphase output, it is a specification for phase voltage setting.

²⁰ For an output voltage of 100 V / 200 V, a load power factor of 1, with respect to stepwise change from an output current of 0 A to the maximum current (or its reverse). 10% ~ 90% of output voltage.

²¹ For 5 Hz to 1 MHz components in DC mode using the output terminal on the rear panel.


Measured Value Display (All accuracy of the measurement function is indicated for $23^\circ\text{C} \pm 5^\circ\text{C}$.)

| | Single-phase output | Polyphase output ²² |
|-----------------------|-----------------------------------|--|
| Voltage ²³ | Resolution | 0.01 V / 0.1 V |
| | RMS value accuracy | 45 Hz to 65 Hz and DC: $\pm(0.5\% \text{ of rdg} + 0.5\text{ V} / 1\text{ V})$ 15 Hz to 2000 Hz: $\pm(0.7\% \text{ of rdg} + 1\text{ V} / 2\text{ V})$ |
| | AVG value accuracy | DC: $\pm(0.5\% \text{ of rdg} + 0.5\text{ V} / 1\text{ V})$ |
| | PEAK value accuracy ²⁴ | 45 Hz to 65 Hz and DC: $\pm(2\% \text{ of rdg} + 1\text{ V} / 2\text{ V})$ |
| Current ²⁴ | Resolution | 0.01 A / 0.1 A |
| | RMS value accuracy | 45 Hz to 65 Hz and DC: $\pm(0.5\% \text{ of rdg} + 0.1\text{ A} / 0.05\text{ A})$ 15 Hz to 2000 Hz: $\pm(0.7\% \text{ of rdg} + 0.2\text{ A} / 0.1\text{ A})$ |
| | AVG value accuracy | DC: $\pm(0.5\% \text{ of rdg} + 0.2\text{ A} / 0.1\text{ A})$ |
| | PEAK value accuracy ²⁵ | 45 Hz to 65 Hz and DC: $\pm(2\% \text{ of rdg} + 0.5\text{ A} / 0.25\text{ A})$ |
| Power ²⁶ | Active (W) | 0.1 W / 1 W |
| | Resolution | $\pm(1\% \text{ of rdg} + 3\text{ W})$ |
| | Accuracy ²⁷ | $\pm(1\% \text{ of rdg} + 1\text{ W})$ |
| | Apparent (VA) | 0.1 VA / 1 VA |
| | Resolution | $\pm(2\% \text{ of rdg} + 6\text{ VA})$ |
| | Accuracy | $\pm(2\% \text{ of rdg} + 2\text{ VA})$ |
| | Reactive (VAR) | 0.1 VAR / 1 VAR |
| | Resolution | $\pm(2\% \text{ of rdg} + 6\text{ VAR})$ |
| | Accuracy ²⁸ | $\pm(2\% \text{ of rdg} + 2\text{ VAR})$ |

SPECIFICATIONS

| Model | ASR-6450 | | ASR-6600 | | |
|---|--|---|---|--|--|
| Power factor | Range | 0.000 to 1.000 | | | |
| | Resolution | 0.001 | | | |
| Harmonic voltage Effective value (rms) Percent (%) (AC-INT and 50/60 Hz only) ¹¹ | Range | Up to 100th order of the fundamental wave | | | |
| | Full Scale | 200 V / 400 V, 100% | | | |
| | Resolution | 0.01 V / 0.1 V, 0.1% | | | |
| | Accuracy ¹² | Up to 20th: $\pm(0.2\% \text{ of rdg} + 0.5 \text{ V} / 1 \text{ V})$; 20th to 100th: $\pm(0.3\% \text{ of rdg} + 0.5 \text{ V} / 1 \text{ V})$ | | | |
| Harmonic current Effective value (rms) Percent (%) (AC-INT and 50/60 Hz only) ¹¹ | Range | Up to 100th order of the fundamental wave | | | |
| | Full Scale | 63 A / 31.5 A, 100% | 21 A / 10.5 A, 100% | | |
| | Resolution | 0.01 A / 0.1 A, 0.1% | | | |
| | Accuracy ¹³ | Up to 20th: $\pm(1\% \text{ of rdg} + 1.5 \text{ A} / 0.75 \text{ A})$ 20th to 100th: $\pm(1.5\% \text{ of rdg} + 1.5 \text{ A} / 0.75 \text{ A})$ | Up to 20th: $\pm(1\% \text{ of rdg} + 0.5 \text{ A} / 0.25 \text{ A})$ 20th to 100th: $\pm(1.5\% \text{ of rdg} + 0.5 \text{ A} / 0.25 \text{ A})$ | | |
| <small> *1. In the polyphase output, the specification is for phase voltage, and the DC average value display cannot be selected. *2. Accuracy values are in the case that the output voltage is within voltage setting range. *3. The accuracy is for output waveform DC or sine wave only. *4. Accuracy values are in the case that the output current is 5% to 100% of the maximum current. *5. The accuracy is for output waveform DC or sine wave only. *6. In the polyphase output, these are the specifications for each phase. *7. For an output voltage of 50 V or greater, an output current in the range of 10% to 100% of the maximum current, DC or an output frequency of 45 Hz to 65 Hz. *8. The apparent and reactive powers are not displayed in the DC mode. *9. For the load with the power factor 0.5 or higher. *10. For the load with the power factor 0.5 or lower. *11. The measurement does not conform to the IEC or other standard. Phase Voltage and Phase Current. *12. For an output voltage of 10 V to 175 V / 20 V to 350 V. *13. An output current in the range of 5% to 100% of the maximum current. </small> | | | | | |
| Others | | | | | |
| Protections | UVP, OVP, OCP, OTP, OPP, Fan Fail, Peak and RMS Current Limit | | | | |
| Parallel function | Up to 4 units | | | | |
| Display | TFT-LCD, 7 inch | | | | |
| Memory function | Store and recall settings, Basic settings: 10 | | | | |
| Arbitrary Wave | Number of memories | 253 (nonvolatile) | | | |
| | Waveform length | 4096 words | | | |
| | Amplitude resolution | 16 bits | | | |
| General Specifications | | | | | |
| Interface | Standard | USB | Type A: Host, Type B: Slave, Speed: 1.1/2.0, USB-CDC / USB-TMC | | |
| | | LAN | MAC Address, DNS IP Address, User Password, Gateway IP Address, Instrument IP Address, Subnet Mask | | |
| | | External | External Signal Input ; External Control I/O ; V/I Monitor Output | | |
| | | RS-232C | Complies with the EIA-RS-232 specifications | | |
| | Optional 1 | GPIO | SCPI-1993, IEEE 488.2 compliant interface | | |
| | Optional 2 | CAN Bus | Complies with CAN 2.0A or 2.0B based protocol | | |
| | Optional 3 | DeviceNet | Complies with CAN 2.0A or 2.0B based protocol | | |
| Insulation resistance | Between input and chassis, output and chassis, input and output | DC 500 V, 30 MΩ or more | | | |
| Withstand voltage | Between input and chassis, output and chassis, input and output | AC 1500 V or DC 2130 V, 1 minute | | | |
| EMC | EN 61326-1 (Class A) EN 61326-2-1/-2-2 (Class A) EN 61000-3-2/-3-12 (Class A, Group 1) EN 61000-3-3/-3-11 (Class A, Group 1) EN 61000-4-2/-4-3/-4-4/-4-5/-4-6/-4-8/-4-11/-4-34 (Class A, Group 1) EN 55011 (Class A, Group 1) | | | | |
| Safety | EN 61010-1 | | | | |
| Vibration, Shock and Transportation Integrity | ISTA 2A Test Procedure | | | | |
| Environment | Operating environment | Indoor use, Overvoltage Category II | | | |
| | Operating temperature range | 0 °C to 40 °C | | | |
| | Storage temperature range | -10 °C to 70 °C | | | |
| | Operating humidity range | 20 %rh to 80 % RH (no condensation) | | | |
| | Storage humidity range | 90 % RH or less (no condensation) | | | |
| | Altitude | Up to 2000 m | | | |
| Dimensions (mm) | 430(W)×176(H)×590(D) (not including protrusions) | | | | |
| Weight | Approx. 40 kg | | | | |
| <small> A value with the accuracy is the guaranteed value of the specification. However, an accuracy noted as reference value shows the supplemental data for reference when the product is used, and is not under the guarantee. A value without the accuracy is the nominal value or representative value (shown as typ.). Product specifications are subject to change without notice. </small> | | | | | |

GRA-451-J Rack Mount Kit (JIS)

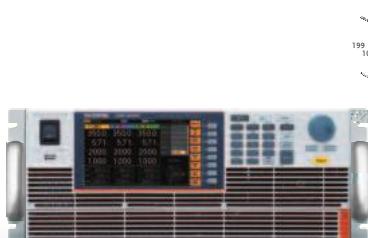

GRA-451-E Rack Mount Kit (EIA)



SPECIFICATIONS

| Model | ASR-6450-09 | | ASR-6600-12 | | | | | | |
|---|---|--|---------------------|--|--|--|--|--|--|
| Input Ratings | | | | | | | | | |
| Power type | Three-phase Three-wire Delta connection, Three-phase Four-wire Y connection | | | | | | | | |
| Voltage range ¹ | 200 Vac to 240 Vac (Phase Voltage), 380 Vac to 460 Vac (Line Voltage) | | | | | | | | |
| Frequency range | 47 Hz to 63 Hz | | | | | | | | |
| Power factor ² | 0.95 or higher (typ.) | | | | | | | | |
| Efficiency ³ | 80 % or higher | | | | | | | | |
| Maximum power consumption | 12 kVA or lower | | 16 kVA or lower | | | | | | |
| AC output | | | | | | | | | |
| Multi-phase output | Single-phase output | Polyphase output | Single-phase output | Polyphase output | | | | | |
| Output capacity | 9 kVA | 1P3W: 6 kVA 3P4W: 9 kVA | 12 kVA | 1P3W: 8 kVA 3P4W: 12 kVA | | | | | |
| Mode | 1P2W | 1P3W 3P4W (Y-connection) | 1P2W | 1P3W 3P4W (Y-connection) | | | | | |
| Setting mode ⁴ | --- | | | | | | | | |
| Phase voltage | Setting Range ⁴ | 0.00 V to 175.0 V / 0.0 V to 350.0 V (sine and square wave), Setting Resolution: 0.01 V / 0.1 V | | | | | | | |
| | | 0.00 Vpp to 500.0 Vpp / 0.00 Vpp to 1000 Vpp (triangle and arbitrary wave), Setting Resolution: 0.01 Vpp / 0.1 Vpp / 1 Vpp | | | | | | | |
| Line voltage setting range ⁶ | Accuracy ⁵ | ±(0.3 % of set + 0.5 V / 1 V) | | | | | | | |
| | | 1P3W: 0.00 V to 350.0 V / 0.00 V to 700.0 V 3P4W: 0.00 V to 303.1 V / 0.00 V to 606.2 V (sine wave only) Setting Resolution: 0.01 V / 0.1 V | --- | 1P3W: 0.00 V to 350.0 V / 0.00 V to 700.0 V 3P4W: 0.00 V to 303.1 V / 0.00 V to 606.2 V (sine wave only) Setting Resolution: 0.01 V / 0.1 V | | | | | |
| Maximum current ⁷ | 90 A / 45 A | 30 A / 15 A | 120 A / 60 A | 40 A / 20 A | | | | | |
| Maximum peak current ⁸ | Four times of the maximum RMS current | | | | | | | | |
| Load power factor ⁹ | 0 to 1 (leading phase or lagging phase, 45 Hz to 65 Hz) | | | | | | | | |
| Frequency | Setting range | AC Mode: 15.00 Hz to 1000.0 Hz, AC+DC Mode: 1.00 Hz to 1000.0 Hz, Setting resolution: 0.01 Hz / 0.1 Hz | | | | | | | |
| | Accuracy | ± 0.01% of set | | | | | | | |
| Output on phase setting range ¹¹ | Stability ¹⁰ | ± 0.005% | | | | | | | |
| | | 0.0° to 359.9° variable (Free / Fix selectable), 0.1° (1 Hz to 500 Hz), 1° (500 Hz to 1000 Hz) | | | | | | | |
| Output off phase setting range ¹¹ | | 0.0° to 359.9° variable (Free / Fix selectable), 0.1° (1 Hz to 500 Hz), 1° (500 Hz to 1000 Hz) | | | | | | | |
| | | 3P4W: L2 phase: 0° to 359.9° L3 phase: 0° to 359.9° Setting Resolution: 0.1° | --- | 3P4W: L2 phase: 0° to 359.9° L3 phase: 0° to 359.9° Setting Resolution: 0.1° | | | | | |
| Setting range of the phase angle ¹² | | 45 Hz to 65 Hz: ±1.0° 15 Hz to 1000 Hz: ±2.0° | | | | | | | |
| | | 45 Hz to 65 Hz: ±1.0° 15 Hz to 1000 Hz: ±2.0° | --- | 45 Hz to 65 Hz: ±1.0° 15 Hz to 1000 Hz: ±2.0° | | | | | |
| Phase angle accuracy ¹³ | ± 20 mV (typ.) | | | | | | | | |
| DC offset ¹⁴ | ± 20 mV (typ.) | | | | | | | | |
| DC output (only single phase output) | | | | | | | | | |
| Output capacity | 9 kW | | 12 kW | | | | | | |
| Mode | Floating output, the N terminal can be grounded | | | | | | | | |
| Voltage | Setting Range | -250.0 V to +250.0 V / -500.0 V to +500.0 V, Setting Resolution: 0.01 V / 0.1 V | | | | | | | |
| | Accuracy ¹⁵ | ±(0.3 % of set) + 0.3 V / 0.6 V | | | | | | | |
| Maximum current ¹⁶ | 90 A / 45 A | 120 A / 60 A | | | | | | | |
| Maximum peak current ¹⁷ | Four times of the maximum current | | | | | | | | |
| Output Stability, Total Harmonic Distortion, Output voltage rising time and Ripple noise | | | | | | | | | |
| Line regulation | ±0.1% or less (Phase voltage) | | | | | | | | |
| Load regulation ¹⁸ | ±0.5 V / ±1.0 V (phase voltage, 0 to 100%, via output terminal) | | | | | | | | |
| Distortion of Output ¹⁹ | <0.3 % @1Hz to 100Hz, <0.5 % @100.1 Hz to 500 Hz, <1 % @500.1 Hz to 1000 Hz | | | | | | | | |
| Output voltage response time ²⁰ | Middle: 100 µs (typ.); Slow: 300 µs (typ.) | | | | | | | | |
| Ripple noise ²¹ | 0.5 Vrms / 1 Vrms (TYP) | | | | | | | | |

*1 Y connection is three-phase, five-wire, Delta connection is three-phase, four-wire.

*2. In the case of AC-INT mode, the rate output voltage, resistance load at maximum output current, 45 Hz to 65 Hz and sine wave output only.

*3. Can be only set in 3P4W mode.

*4. For phase voltage setting in polyphase output. In balance mode all phase are collectively set and in unbalance mode each phases are individually set.

*5. For an output voltage of 10 V to 175 V / 20 V to 350 V, sine wave, an output frequency of 45 Hz to 65 Hz, no load, DC voltage setting 0V (AC+DC mode) and 23°C ± 5°C. For phase voltage setting in the polyphase output.

*6. Line voltage only can be set in balance mode.

*7. If the output voltage is higher than rated value, this is limited to satisfy the power capacity. If there is the DC superimposition, the active current of AC+DC satisfies the maximum current. In the case of 40 Hz or lower or 400 Hz or higher, and that the ambient temperature is 40 degree or higher, the maximum current may decrease.

*8. With respect to the capacitor-input rectifying load. Limited by the maximum current.

*9. External power injection or regeneration which is over short reverse power flow capacity is not available.

*10. For 45 Hz to 65 Hz, the rated output voltage, no load and the resistance load for the maximum current, and the operating temperature range.

*11. L1, L2 and L3 phase can be set independent in the polyphase output.

*12. Can be set only with independent mode in polyphase output.

*13. For an output voltage of 50V or higher, sine wave, same load and voltage condition for all phase.

*14. In the case of the AC mode and output voltage setting to 0 V, 23°C ± 5°C

*15. For an output voltage of -250 V to -10 V, +10 V to +250 V / -500 V to -20 V, +20 V to +500 V, no load, AC voltage set to 0V (AC+DC mode) and 23°C ± 5°C

*16. If the output voltage is higher than rated value, this is limited to satisfy the power capacity. If there is the AC superimposition, the active current of AC+DC satisfies the maximum current.

And the ambient temperature is 40 degree or higher, the maximum current may decrease.

*17. Instantaneous within 3 ms, limited by the maximum current at rated output voltage.

*18. For an output voltage of 75 V to 175 V / 150 V to 350 V, a load power factor of 1, stepwise change from an output current of 0 A to maximum current (or its reverse), using the output terminal on the rear panel.

*19. 50 % or higher of the rated output voltage, the maximum current or lower, AC and AC+DC modes, THD+N. For the polyphase output, it is a specification for phase voltage setting.

*20. For an output voltage of 100 V / 200 V, a load power factor of 1, with respect to stepwise change from an output current of 0 A to the maximum current (or its reverse). 10% ~ 90% of output voltage.

*21. For 5 Hz to 1 MHz components in DC mode using the output terminal on the rear panel.

Measured Value Display (All accuracy of the measurement function is indicated for 23 °C± 5 °C.)

| | Single-phase output | Polyphase output ²⁶ |
|------------------------|-----------------------------------|---|
| Voltage ^{1/2} | Resolution | 0.01 V / 0.1 V |
| | RMS value accuracy | 45 Hz to 65 Hz and DC: ± (0.5 % of rdg + 0.5 V / 1 V) 15 Hz to 1000 Hz: ± (0.7 % of rdg + 1 V / 2 V) |
| | AVG value accuracy | DC: ± (0.5 % of rdg) + 0.5 V / 1 V |
| | PEAK value accuracy ²³ | 45 Hz to 65 Hz and DC: ± (2 % of rdg) + 1 V / 2 V |
| Current ²⁴ | Resolution | 0.01 A / 0.1 A |
| | RMS value accuracy | 45 Hz to 65 Hz and DC: ± (0.5 % of rdg + 0.2 A / 0.1 A) 15 Hz to 1000 Hz: ± (0.7 % of rdg + 0.4 A / 0.2 A) |
| | AVG value accuracy | DC: ± (0.5 % of rdg) + 0.4 A / 0.2 A |
| | PEAK value accuracy ²⁵ | 45 Hz to 65 Hz and DC: ± (2 % of rdg) + 2 A / 1 A |

SPECIFICATIONS

| | | | ASR-6450-09 | ASR-6600-12 | | | | | |
|---|---|---|--|-----------------------|--|--|--|--|--|
| Power ^{*7*8} | Active (W) | Resolution | 0.1 W / 1 W / 10 W | | | | | | |
| | Accuracy ^{*9} | Accuracy | ±(2 % of rdg + 6 W) | ±(2 % of rdg + 2 W) | | | | | |
| | Apparent (VA) | Resolution | 0.1 VA / 1 VA / 10VA | | | | | | |
| | Accuracy | Accuracy | ±(2 % of rdg + 9 VA) | ±(2 % of rdg + 3 VA) | | | | | |
| | Reactive (VAR) | Resolution | 0.1 VAR / 1 VAR / 10VAR | | | | | | |
| | Accuracy ^{*10} | Accuracy | ±(2 % of rdg + 9 VAR) | ±(2 % of rdg + 3 VAR) | | | | | |
| | Power factor | Range | 0.000 to 1.000 | | | | | | |
| | | Resolution | 0.001 | | | | | | |
| Harmonic voltage Effective value (rms) Percent (%) (AC-INT and 50/60 Hz only) ^{*11} | Range | Up to 100th order of the fundamental wave | | | | | | | |
| | Full Scale | 200 V / 400 V, 100% | | | | | | | |
| | Resolution | 0.01 V / 0.1 V, 0.1% | | | | | | | |
| | Accuracy ^{*12} | Up to 20th: ±(0.2 % of rdg + 0.5 V / 1 V) 21th to 100th: ±(0.3 % of rdg + 0.5 V / 1 V) | | | | | | | |
| | Harmonic current Effective value (rms) Percent (%) (AC-INT and 50/60 Hz only) ^{*11} | Range | Up to 100th order of the fundamental wave | | | | | | |
| Harmonic current Effective value (rms) Percent (%) (AC-INT and 50/60 Hz only) ^{*11} | Full Scale | 126 A / 63 A, 100% | 42 A / 21 A, 100% | | | | | | |
| | Resolution | 0.01 A / 0.1 A, 0.1% | | | | | | | |
| | Accuracy ^{*13} | Up to 20th: ±(1 % of rdg + 3 A / 1.5 A) 21th to 100th: ±(1.5 % of rdg + 3 A / 1.5 A) | Up to 20th: ±(1 % of rdg + 1 A / 0.5 A) 21th to 100th: ±(1.5 % of rdg + 1 A / 0.5 A) | | | | | | |
| | | | | | | | | | |
| <p>*1. In the polyphase output, the specification is for phase voltage, and the DC average value display cannot be selected.</p> <p>*2. Accuracy values are in the case that the output voltage is within voltage setting range.</p> <p>*3. The accuracy is for output waveform DC or sine wave only.</p> <p>*4. Accuracy values are in the case that the output current is 5% to 100% of the maximum current.</p> <p>*5. The accuracy is for output waveform DC or sine wave only.</p> <p>*6. In the polyphase output, these are the specifications for each phase.</p> <p>*7. For an output voltage of 50 V or greater, an output current in the range of 10 % to 100 % of the maximum current, DC or an output frequency of 45 Hz to 65 Hz.</p> <p>*8. The apparent and reactive powers are not displayed in the DC mode.</p> <p>*9. For the load with the power factor 0.5 or higher.</p> <p>*10. For the load with the power factor 0.5 or lower.</p> <p>*11. The measurement does not conform to the IEC or other standard. Phase Voltage and Phase Current.</p> <p>*12. For an output voltage of 10 V to 175 V / 20 V to 350 V.</p> <p>*13. An output current in the range of 5 % to 100 % of the maximum current.</p> | | | | | | | | | |
| <h3>Others</h3> | | | | | | | | | |
| Protections | UVP, OVP, OCP, OTP, OPP, Fan Fail, Peak and RMS Current Limit | | | | | | | | |
| Display | TFT-LCD, 7 inch | | | | | | | | |
| Memory function | Store and recall settings, Basic settings: 10 | | | | | | | | |
| Arbitrary wave | Number of memories | 253 (nonvolatile) | | | | | | | |
| | Waveform length | 4096 words | | | | | | | |
| | Amplitude resolution | 16 bits | | | | | | | |
| <h3>General Specifications</h3> | | | | | | | | | |
| Interface | Standard | USB | Type A: Host, Type B: Slave, Speed: 2.0, USB-CDC / USB-TMC | | | | | | |
| | | LAN | MAC Address, DNS IP Address, User Password, Gateway IP Address, Instrument IP Address, Subnet Mask | | | | | | |
| | | External | External Signal Input; External Control I/O; V/I Monitor Output | | | | | | |
| | | RS-232C | Complies with the EIA-RS-232 specifications | | | | | | |
| | Optional 1 | GPIO | SCPI-1993, IEEE 488.2 compliant interface | | | | | | |
| | Optional 2 | CAN Bus | Complies with CAN 2.0A or 2.0B based protocol | | | | | | |
| | Optional 3 | Device Net | Complies with CAN 2.0A or 2.0B based protocol | | | | | | |
| Insulation resistance | Between input and chassis, output and chassis, input and output | DC 500 V, 30 MΩ or more | | | | | | | |
| Withstand voltage | Between input and chassis, output and chassis, input and output | AC 1500 V or DC 2130 V, 1 minute | | | | | | | |
| EMC | EN 61326-1 (Class A) EN 61326-2-1/-2-2 (Class A) EN 61000-3-2 (Class A, Group 1) EN 61000-3-3 (Class A, Group 1) EN 61000-4-2/-4-3/-4-4/-4-5/-4-6/-4-8/-4-11 (Class A, Group 1) EN 55011 (Class A, Group1) | | | | | | | | |
| Safety | EN 61010-1 | | | | | | | | |
| Environment | Operating environment | Indoor use, Overvoltage Category II | | | | | | | |
| | Operating temperature range | 0 °C to 40 °C | | | | | | | |
| | Storage temperature range | -10 °C to 70 °C | | | | | | | |
| | Operating humidity range | 20 %rh to 80 % RH (no condensation) | | | | | | | |
| | Storage humidity range | 90 % RH or less (no condensation) | | | | | | | |
| | Altitude | Up to 2000 m | | | | | | | |
| Dimensions (mm) | 598(W)×937(H)×906(D) (not including protrusions) | | | | | | | | |
| Weight | Approx. 155 kg | | | | | | | | |
| <p>A value with the accuracy is the guaranteed value of the specification. However, an accuracy noted as reference value shows the supplemental data for reference when the product is used, and is not under the guarantee. A value without the accuracy is the nominal value or representative value (shown as typ.).</p> <p>Product specifications are subject to change without notice.</p> | | | | | | | | | |

SPECIFICATIONS

| Model | ASR-6450-13.5 | | ASR-6600-18 | | | | | | | |
|---|--|---|---|---|--|--|--|--|--|--|
| Input Ratings | | | | | | | | | | |
| Power type | Three-phase Three-wire Delta connection, Three-phase Four-wire Y connection | | | | | | | | | |
| Voltage range ^① | 200 Vac to 240 Vac (Phase Voltage), 380 Vac to 460 Vac (Line Voltage) | | | | | | | | | |
| Frequency range | 47 Hz to 63 Hz | | | | | | | | | |
| Power factor ^② | 0.95 or higher (typ.) | | | | | | | | | |
| Efficiency ^② | 80 % or higher | | | | | | | | | |
| Maximum power consumption | 18 kVA or lower | | 24 kVA or lower | | | | | | | |
| AC Output | | | | | | | | | | |
| Multi-phase output | Single-phase output | Polyphase output | Single-phase output | Polyphase output | | | | | | |
| Output capacity | 13.5 kVA | 1P3W: 9 kVA 3P4W: 13.5 kVA | 18 kVA | 1P3W: 12 kVA 3P4W: 18 kVA | | | | | | |
| Mode | 1P2W | 1P3W 3P4W (Y-connection) | 1P2W | 1P3W 3P4W (Y-connection) | | | | | | |
| Setting mode ^③ | --- | Unbalance, Balanced | --- | Unbalance, Balanced | | | | | | |
| Phase voltage | Setting Range ^④ | 0.00 V to 175.0 V / 0.0 V to 350.0 V (sine and square wave), Setting Resolution: 0.01 V / 0.1 V | | | | | | | | |
| | | 0.00 Vpp to 500.0 Vpp / 0.00 Vpp to 1000 Vpp (triangle and arbitrary wave), Setting Resolution: 0.01 Vpp / 0.1 Vpp / 1 Vpp | | | | | | | | |
| Accuracy ^⑤ | | ±(0.3 % of set + 0.5 V / 1 V) | | | | | | | | |
| | | | | | | | | | | |
| Line voltage setting range ^⑥ | --- | 1P3W: 0.00 V to 350.0 V / 0.0 V to 700.0 V 3P4W: 0.00 V to 303.1 V / 0.0 V to 606.2 V (sine wave only) Setting Resolution: 0.01 V / 0.1 V | --- | 1P3W: 0.00 V to 350.0 V / 0.0 V to 700.0 V 3P4W: 0.00 V to 303.1 V / 0.0 V to 606.2 V (sine wave only) Setting Resolution: 0.01 V / 0.1 V | | | | | | |
| Maximum current ^⑦ | 135 A / 67.5 A | 45 A / 22.5 A | 180 A / 90 A | 60 A / 30 A | | | | | | |
| Maximum peak current ^⑧ | Four times of the maximum RMS current | | | | | | | | | |
| Load power factor ^⑨ | 0 to 1 (leading phase or lagging phase, 45 Hz to 65 Hz) | | | | | | | | | |
| Frequency | Setting range | AC Mode: 15.00 Hz to 1000.0 Hz, AC+DC Mode: 1.00 Hz to 1000.0 Hz, Setting resolution: 0.01 Hz / 0.1 Hz | | | | | | | | |
| | | ± 0.01 % of set | | | | | | | | |
| Output on phase setting range ^⑪ | Setting range | AC Mode: 15.00 Hz to 1000.0 Hz, AC+DC Mode: 1.00 Hz to 1000.0 Hz, Setting resolution: 0.01 Hz / 0.1 Hz | | | | | | | | |
| | | ± 0.005 % | | | | | | | | |
| Output off phase setting range ^⑫ | 0.0° to 359.9° variable (Free / Fix selectable), 0.1° (1 Hz to 500 Hz), 1° (500 Hz to 1000 Hz) | | | | | | | | | |
| Setting range of the phase angle ^⑬ | --- | 3P4W: L2 phase: 0° to 359.9° L3 phase: 0° to 359.9° Setting Resolution: 0.1° | --- | 3P4W: L2 phase: 0° to 359.9° L3 phase: 0° to 359.9° Setting Resolution: 0.1° | | | | | | |
| Phase angle accuracy ^⑭ | --- | 45 Hz to 65 Hz: ± 1.0° 15 Hz to 1000 Hz: ± 2.0° | --- | 45 Hz to 65 Hz: ± 1.0° 15 Hz to 1000 Hz: ± 2.0° | | | | | | |
| DC Offset ^⑮ | ± 20 mV (typ.) | | | | | | | | | |
| DC output (only single phase output) | | | | | | | | | | |
| Output Capacity | 13.5 kW | | 18 kW | | | | | | | |
| Mode | Floating output, the N terminal can be grounded | | | | | | | | | |
| Voltage | Setting Range | -250.0 V to +250.0 V / -500.0 V to +500.0 V, Setting Resolution: 0.01 V / 0.1 V | | | | | | | | |
| | | ± (0.3 % of set) + 0.3 V / 0.6 V | | | | | | | | |
| Maximum current ^⑯ | 135 A / 67.5 A | 180 A / 90 A | | | | | | | | |
| Maximum peak current ^⑰ | Four times of the maximum current | | | | | | | | | |
| Output Stability, Total Harmonic Distortion, Output voltage rising time and Ripple noise | | | | | | | | | | |
| Line regulation | ± 0.1 % or less (Phase voltage) | | | | | | | | | |
| Load regulation ^⑱ | ± 0.5 V / ± 1.0 V (phase voltage, 0 to 100%, via output terminal) | | | | | | | | | |
| Distortion of Output ^⑲ | < 0.3 % @ 1Hz to 100Hz, < 0.5 % @ 100.1 Hz to 500 Hz, < 1 % @ 500.1 Hz to 1000 Hz | | | | | | | | | |
| Output voltage response time ^⑳ | Middle: 100 us (typ.); Slow: 300 us (typ.) | | | | | | | | | |
| Ripple noise ^㉑ | 0.5 Vrms / 1 Vrms (TYP) | | | | | | | | | |
| *1 Y connection is three-phase, five-wire, Delta connection is three-phase, four-wire. | | | | | | | | | | |
| *2 In the case of AC-INT mode, the rated output voltage, resistance load at maximum output current, 45 Hz to 65 Hz and sine wave output only. | | | | | | | | | | |
| *3. Can be only set in 3P4W mode. | | | | | | | | | | |
| *4. For phase voltage setting in polyphase output. In balance mode all phase are collectively set and in unbalance mode each phases are individually set. | | | | | | | | | | |
| *5. For an output voltage of 10 V to 175 V / 20 V to 350 V, sine wave, an output frequency of 45 Hz to 65 Hz, no load, DC voltage setting 0V (AC+DC mode) and 23°C ± 5°C. For phase voltage setting in the polyphase output. | | | | | | | | | | |
| *6. Line voltage only can be set in balance mode. | | | | | | | | | | |
| *7. If the output voltage is higher than rated value, this is limited to satisfy the power capacity. If there is the DC superimposition, the active current of AC+DC satisfies the maximum current. In the case of 40 Hz or lower or 400 Hz or higher, and that the ambient temperature is 40 degree or higher, the maximum current may decrease. | | | | | | | | | | |
| *8. With respect to the capacitor-input rectifying load. Limited by the maximum current. | | | | | | | | | | |
| *9. External power injection or regeneration which is over short reverse power flow capacity is not available. | | | | | | | | | | |
| *10. For 45 Hz to 65 Hz, the rated output voltage, no load and the resistance load for the maximum current, and the operating temperature range. | | | | | | | | | | |
| *11. L1, L2 and L3 phase can be set independent in the polyphase output. | | | | | | | | | | |
| *12. Can be set only with independent mode in polyphase output. | | | | | | | | | | |
| *13. For an output voltage of 50V or higher, sine wave, same load and voltage condition for all phase. | | | | | | | | | | |
| *14. In the case of the AC mode and output voltage setting to 0 V, 23°C ± 5°C | | | | | | | | | | |
| *15. For an output voltage of -250 V to -10 V, +10 V to +250 V / -500 V to -20 V, +20 V to +500 V, no load, AC voltage set to 0V (AC+DC mode) and 23°C ± 5°C | | | | | | | | | | |
| *16. If the output voltage is higher than rated value, this is limited to satisfy the power capacity. If there is the DC superimposition, the active current of AC+DC satisfies the maximum current. And the ambient temperature is 40 degree or higher, the maximum current may decrease. | | | | | | | | | | |
| *17. Instantaneous within 3 ms, limited by the maximum current at rated output voltage. | | | | | | | | | | |
| *18. For an output voltage of 75 V to 175 V / 150 V to 350 V, a load power factor of 1, stepwise change from an output current of 0 A to maximum current (or its reverse), using the output terminal on the rear panel. | | | | | | | | | | |
| *19. 50 % or higher of the rated output voltage, the maximum current or lower, AC and AC+DC modes, THD+N. For the polyphase output, it is a specification for phase voltage setting. | | | | | | | | | | |
| *20. For an output voltage of 100 V / 200 V, a load power factor of 1, with respect to stepwise change from an output current of 0 A to the maximum current (or its reverse). 10% ~ 90% of output voltage. | | | | | | | | | | |
| *21. For 5 Hz to 1 MHz components in DC mode using the output terminal on the rear panel. | | | | | | | | | | |
| Measured Value Display (All accuracy of the measurement function is indicated for 23 °C ± 5 °C.) | | | | | | | | | | |
| | Single-phase output | | Polyphase output ^㉒ | | | | | | | |
| Voltage ^{㉓㉔} | Resolution | 0.01 V / 0.1 V | | | | | | | | |
| | RMS value accuracy | 45 Hz to 65 Hz and DC: ± (0.5 % of rdg + 0.5 V / 1 V) 15 Hz to 1000 Hz: ± (0.7 % of rdg + 1 V / 2 V) | 45 Hz to 65 Hz: ± (0.5 % of rdg + 0.5 V / 1 V) 15 Hz to 1000 Hz: ± (0.7 % of rdg + 1 V / 2 V) | | | | | | | |
| | AVG value accuracy | DC: ± (0.5 % of rdg + 0.5 V / 1 V) | DC: ± (0.5 % of rdg + 0.5 V / 1 V) | | | | | | | |
| | PEAK value accuracy ^㉕ | 45 Hz to 65 Hz and DC: ± (2 % of rdg + 1 V / 2 V) | 45 Hz to 65 Hz: ± (2 % of rdg + 1 V / 2 V) | | | | | | | |
| Current ^㉔ | Resolution | 0.01 A / 0.1 A | | | | | | | | |
| | RMS value accuracy | 45 Hz to 65 Hz and DC: ± (0.5 % of rdg + 0.3 A / 0.15 A) 15 Hz to 1000 Hz: ± (0.7 % of rdg + 0.6 A / 0.4 A) | 45 Hz to 65 Hz: ± (0.5 % of rdg + 0.15 A / 0.08 A) 15 Hz to 1000 Hz: ± (0.7 % of rdg + 0.3 A / 0.15 A) | | | | | | | |
| | AVG value accuracy | DC: ± (0.5 % of rdg + 0.6 A / 0.4 A) | DC: ± (0.5 % of rdg + 0.3 A / 0.15 A) | | | | | | | |
| | PEAK value accuracy ^㉖ | 45 Hz to 65 Hz and DC: ± (2 % of rdg + 3 A / 1.5 A) | 45 Hz to 65 Hz: ± (2 % of rdg + 1.5 A / 0.75 A) | | | | | | | |

SPECIFICATIONS

| Model | | ASR-6450-13.5 | | ASR-6600-18 | | |
|--|---|---|--|---|--|--|
| Power ^{⑦⑧} | Active (W) | Resolution | 0.1 W / 1 W / 10 W | | | |
| | | Accuracy ^⑨ | ±(2 % of rdg + 6 W) | ±(2 % of rdg + 2 W) | | |
| | Apparent (VA) | Resolution | 0.1 VA / 1 VA / 10VA | | | |
| | | Accuracy | ±(2 % of rdg + 9 VA) | ±(2 % of rdg + 3 VA) | | |
| | Reactive (VAR) | Resolution | 0.1 VAR / 1 VAR / 10VAR | | | |
| | | Accuracy ^⑩ | ±(2 % of rdg + 9 VAR) | ±(2 % of rdg + 3 VAR) | | |
| Power factor | Range | | 0.000 to 1.000 | | | |
| | Resolution | | 0.001 | | | |
| Harmonic voltage Effective value (rms) Percent (%) (AC-INT and 50/60 Hz only) ^⑪ | Range | | Up to 100th order of the fundamental wave | | | |
| | Full Scale | | 200 V / 400 V, 100% | | | |
| | Resolution | | 0.01 V / 0.1 V, 0.1% | | | |
| | Accuracy ^⑫ | | Up to 20th: ±(0.2 % of rdg + 0.5 V / 1 V) 21th to 100th: ±(0.3 % of rdg + 0.5 V / 1 V) | | | |
| | Range | | Up to 100th order of the fundamental wave | | | |
| | Full Scale | | 189 A / 94.5 A, 100% | 63 A / 31.5 A, 100% | | |
| Harmonic current Effective value (rms) Percent (%) (AC-INT and 50/60 Hz only) ^⑪ | Resolution | | 0.01 A / 0.1 A, 0.1% | | | |
| | Accuracy ^⑬ | | Up to 20th: ±(1 % of rdg + 3 A / 1.5 A) 21th to 100th: ±(1.5 % of rdg + 3 A / 1.5 A) | Up to 20th: ±(1 % of rdg + 1 A / 0.5 A) 21th to 100th: ±(1.5 % of rdg + 1 A / 0.5 A) | | |
| | | | | | | |
| ①. In the polyphase output, the specification is for phase voltage, and the DC average value display cannot be selected. | | | | | | |
| ②. Accuracy values are in the case that the output voltage is within voltage setting range. | | | | | | |
| ③. The accuracy is for output waveform DC or sine wave only. | | | | | | |
| ④. Accuracy values are in the case that the output current is 5% to 100% of the maximum current. | | | | | | |
| ⑤. The accuracy is for output waveform DC or sine wave only. | | | | | | |
| ⑥. In the polyphase output, these are the specifications for each phase. | | | | | | |
| ⑦. For an output voltage of 50 V or greater, an output current in the range of 10 % to 100 % of the maximum current, DC or an output frequency of 45 Hz to 65 Hz. | | | | | | |
| ⑧. The apparent and reactive powers are not displayed in the DC mode. | | | | | | |
| ⑨. For the load with the power factor 0.5 or higher. | | | | | | |
| ⑩. For the load with the power factor 0.5 or lower. | | | | | | |
| ⑪. The measurement does not conform to the IEC or other standard. Phase Voltage and Phase Current. | | | | | | |
| ⑫. For an output voltage of 10 V to 175 V / 20 V to 350 V. | | | | | | |
| ⑬. An output current in the range of 5 % to 100 % of the maximum current.an output current of 0 A to the maximum current (or its reverse). 10 % to 90 % of output voltage. | | | | | | |
| ⑭. For 5 Hz to 1 MHz components in DC mode using the output terminal on the rear panel. | | | | | | |
| Others | | | | | | |
| Protections | | UVP, OVP, OCP, OTP, OPP, Fan Fail, Peak and RMS Current Limit | | | | |
| Display | | TFT-LCD, 7 inch | | | | |
| Memory function | | Store and recall settings, Basic settings: 10 | | | | |
| Arbitrary wave | Number of memories | 253 (nonvolatile) | | | | |
| | Waveform length | 4096 words | | | | |
| | Amplitude resolution | 16 bits | | | | |
| General Specifications | | | | | | |
| Interface | Standard | USB | Type A: Host, Type B: Slave, Speed: 2.0, USB-CDC / USB-TMC | | | |
| | | LAN | MAC Address, DNS IP Address, User Password, Gateway IP Address, Instrument IP Address, Subnet Mask | | | |
| | | External | External Signal Input; External Control I/O; V/I Monitor Output | | | |
| | | RS-232C | Complies with the EIA-RS-232 specifications | | | |
| | Optional 1 | GPIO | SCPI-1993, IEEE 488.2 compliant interface | | | |
| | Optional 2 | CAN Bus | Complies with CAN 2.0A or 2.0B based protocol | | | |
| | Optional 3 | Device Net | Complies with CAN 2.0A or 2.0B based protocol | | | |
| Insulation resistance | Between input and chassis, output and chassis, input and output | DC 500 V, 30 MΩ or more | | | | |
| Withstand voltage | Between input and chassis, output and chassis, input and output | AC 1500 V or DC 2130 V, 1 minute | | | | |
| EMC | | EN 61326-1 (Class A) EN 61326-2-1/-2-2 (Class A) EN 61000-3-2 (Class A, Group 1) EN 61000-3-3 (Class A, Group 1) EN 61000-4-2/-4-3/-4-4/-4-5/-4-6/-4-8/-4-11 (Class A, Group 1) EN 55011 (Class A, Group1) | | | | |
| Safety | | EN 61010-1 | | | | |
| Environment | Operating environment | Indoor use, Overvoltage Category II | | | | |
| | Operating temperature range | 0 °C to 40 °C | | | | |
| | Storage temperature range | -10 °C to 70 °C | | | | |
| | Operating humidity range | 20 %rh to 80 % RH (no condensation) | | | | |
| | Storage humidity range | 90 % RH or less (no condensation) | | | | |
| Altitude | | Up to 2000 m | | | | |
| Dimensions (mm) | | 598(W)×1116(H)×906(D) (not including protrusions) | | | | |
| Weight | | Approx. 200 kg | | | | |
| A value with the accuracy is the guaranteed value of the specification. However, an accuracy noted as reference value shows the supplemental data for reference when the product is used, and is not under the guarantee. A value without the accuracy is the nominal value or representative value (shown as typ.). Product specifications are subject to change without notice. | | | | | | |

SPECIFICATIONS

| Model | ASR-6600-24 | | ASR-6600-30 | | ASR-6600-36 | | | | | | | | |
|---|---|--|---|------------------------------|---|------------------------------|---|--|--|--|--|--|--|
| Input Ratings | | | | | | | | | | | | | |
| Power type | Three phase Three wire Delta connection, Three phase Four wire Y connection | | | | | | | | | | | | |
| Voltage range ¹ | 200 to 240 Vac $\pm 10\%$ (Phase Voltage), 380 to 415 Vac $\pm 10\%$ (Line Voltage) | | | | | | | | | | | | |
| Frequency range | 47 Hz to 63 Hz | | | | | | | | | | | | |
| Power factor ² | 0.95 or higher (typ.) | | | | | | | | | | | | |
| Efficiency ² | 80 % or higher | | | | | | | | | | | | |
| Maximum power consumption | 32 kVA or lower | 40 kVA or lower | | 48 kVA or lower | | | | | | | | | |
| AC Output | | | | | | | | | | | | | |
| Multi-phase output | Single-phase output | Polyphase output | Single-phase output | Polyphase output | Single-phase output | Polyphase output | | | | | | | |
| Output capacity | 24 kVA | 1P3W: 16 kVA 3P4W: 24 kVA | 30 kVA | 1P3W: 20 kVA 3P4W: 30 kVA | 36 kVA | 1P3W: 24 kVA 3P4W: 36 kVA | | | | | | | |
| Mode | 1P2W | 1P3W 3P4W (Y-connection) | 1P2W | 1P3W 3P4W (Y-connection) | 1P2W | 1P3W 3P4W (Y-connection) | | | | | | | |
| Setting mode ³ | --- | Unbalance, Balanced | --- | Unbalance, Balanced | --- | Unbalance, Balanced | | | | | | | |
| Phase voltage | Setting Range ⁴ | 0.00 V to 175.0 V / 0.0 V to 350.0 V (sine and square wave), Setting Resolution: 0.01 V / 0.1 V | | | | | | | | | | | |
| | Accuracy ⁵ | 0.00 Vpp to 500.0 Vpp / 0.00 Vpp to 1000 Vpp (triangle and arbitrary wave), Setting Resolution: 0.01 Vpp / 0.1 Vpp | | | | | | | | | | | |
| | | $\pm(0.3\% \text{ of set} + 0.5\% \text{ of } 1\text{ V})$ | | | | | | | | | | | |
| Line voltage setting range ⁶ | | --- | 1P3W: 0.00 V to 350.0 V / 0.00 V to 700.0 V 3P4W: 0.00 V to 303.1 V / 0.00 V to 606.2 V (sine wave only) | --- | 1P3W: 0.00 V to 350.0 V / 0.00 V to 700.0 V 3P4W: 0.00 V to 303.1 V / 0.00 V to 606.2 V (sine wave only) | --- | | | | | | | |
| Maximum current ⁷ | 240 A / 120 A | 80 A / 40 A | 300 A / 150 A | 100 A / 50 A | 360 A / 180 A | 120 A / 60 A | | | | | | | |
| Maximum peak current ⁸ | Four times of the maximum RMS current | | | | | | | | | | | | |
| Load power factor ⁹ | 0 to 1 (leading phase or lagging phase, 45 Hz to 65 Hz) | | | | | | | | | | | | |
| Frequency | Setting range | AC Mode: 15.00 Hz to 550.0 Hz, AC+DC Mode: 1.00 Hz to 550.0 Hz, Setting resolution: 0.01 Hz / 0.1 Hz | | | | | | | | | | | |
| | Accuracy | $\pm 0.01\% \text{ of set}$ | | | | | | | | | | | |
| | Stability ¹⁰ | $\pm 0.005\%$ | | | | | | | | | | | |
| Output on phase setting range ¹¹ | | 0.0° to 359.9° variable (Free / Fix selectable), 0.1° (1 Hz to 500 Hz), 1° (500 Hz to 550 Hz) | | | | | | | | | | | |
| Output off phase setting range ¹¹ | | 0.0° to 359.9° variable (Free / Fix selectable), 0.1° (1 Hz to 500 Hz), 1° (500 Hz to 550 Hz) | | | | | | | | | | | |
| Setting range of the phase angle ¹² | | --- | 3P4W: L2 phase: 0° to 359.9° L3 phase: 0° to 359.9° Setting Resolution: 0.1° | --- | 3P4W: L2 phase: 0° to 359.9° L3 phase: 0° to 359.9° Setting Resolution: 0.1° | --- | 3P4W: L2 phase: 0° to 359.9° L3 phase: 0° to 359.9° Setting Resolution: 0.1° | | | | | | |
| Phase angle accuracy ¹³ | | --- | 45 Hz to 65 Hz: $\pm 1.0^\circ$ 15 Hz to 550 Hz: $\pm 2.0^\circ$ | --- | 45 Hz to 65 Hz: $\pm 1.0^\circ$ 15 Hz to 550 Hz: $\pm 2.0^\circ$ | --- | 45 Hz to 65 Hz: $\pm 1.0^\circ$ 15 Hz to 550 Hz: $\pm 2.0^\circ$ | | | | | | |
| DC offset ¹⁴ | $\pm 20\text{ mV}$ (typ.) | | | | | | | | | | | | |
| DC Output (only single phase output) | | | | | | | | | | | | | |
| Output capacity | 24 kW | | 30 kW | | 36 kW | | | | | | | | |
| Mode | Floating output, the N terminal can be grounded | | | | | | | | | | | | |
| Voltage | Setting Range ¹⁵ | -250.0 V to +250.0 V / -500.0 V to +500.0 V, Setting Resolution: 0.01 V / 0.1 V | | | | | | | | | | | |
| | Accuracy ¹⁵ | $\pm(0.3\% \text{ of set} + 0.3\% \text{ of } 0.6\text{ V})$ | | | | | | | | | | | |
| Maximum current ¹⁶ | 240 A / 120 A | 300 A / 150 A | | 360 A / 180 A | | | | | | | | | |
| Maximum peak current ¹⁷ | Four times of the maximum current | | | | | | | | | | | | |
| Output Stability, Total Harmonic Distortion, Output Voltage Rising Time and Ripple Noise | | | | | | | | | | | | | |
| Line regulation | $\pm 0.1\%$ or less (Phase voltage) | | | | | | | | | | | | |
| Load regulation ¹⁸ | $\pm 1\%$ (phase voltage: 0% to 100%, via output terminal) | | | | | | | | | | | | |
| Distortion of Output ¹⁹ | <0.3 % @1 Hz to 100 Hz, <0.5 % @100.1 Hz to 550 Hz | | | | | | | | | | | | |
| Output voltage response time ²⁰ | Slow: 300 μs (typ.) | | | | | | | | | | | | |
| Ripple noise ²¹ | 0.5 Vrms / 1 Vrms (typ.) | | | | | | | | | | | | |

¹ 1. Y connection is three-phase, five-wire, Delta connection is three-phase, four-wire. (Accessories will be provided)

² 2. In the case of AC-INT mode, the rate output voltage, resistance load at maximum output current, 45 Hz to 65 Hz and sine wave output only.

³ 3. Can be only set in 3P4W mode.

⁴ 4. For phase voltage setting in polyphase output. In balance mode all phase are collectively set and in unbalance mode each phases are individually set.

⁵ 5. For an output voltage of 10 V to 175 V / 20 V to 350 V, sine wave, an output frequency of 45 Hz to 65 Hz, no load, DC voltage setting 0V (AC+DC mode) and 23 °C ± 5 °C. For phase voltage setting in the polyphase output.

⁶ 6. Line voltage only can be set in balance mode.

⁷ 7. If the output voltage is higher than rated value, this is limited to satisfy the power capacity. If there is the DC superimposition, the active current of AC+DC satisfies the maximum current. In the case of 40 Hz or lower or 400 Hz or higher, and that the ambient temperature is 40 degree or higher, the maximum current may decrease.

⁸ 8. With respect to the capacitor-input rectifying load. Limited by the maximum current.

⁹ 9. External power injection or regeneration which is over short reverse power flow capacity is not available.

¹⁰ 10. For 45 Hz to 65 Hz, the rated output voltage, no load and the resistance load for the maximum current, and the operating temperature range.

¹¹ 11. L1, L2 and L3 phase can set independt at independ mode in the polyphase output.

¹² 12. Can be set only with independ mode in polyphase output.

¹³ 13. For an output voltage of 50 V or higher, sine wave, same load and voltage condition for all phase.

¹⁴ 14. In the case of the AC mode and output voltage setting to 0 V, 23 °C ± 5 °C

¹⁵ 15. For an output voltage of -250 V to -10 V, +10 V to +250 V / -500 V to -20 V, +20 V to +500 V, no load, AC voltage set to 0 V (AC+DC mode) and 23 °C ± 5 °C

¹⁶ 16. If the output voltage is higher than rated value, this is limited to satisfy the power capacity. If there is the AC superimposition, the active current of AC+DC satisfies the maximum current.

And the ambient temperature is 40 degree or higher, the maximum current may decrease.

¹⁷ 17. Instantaneous within 3 ms, limited by the maximum current at rated output voltage.

¹⁸ 18. For an output voltage of 75 V to 175 V / 150 V to 350 V, a load power factor of 1, stepwise change from an output current of 0 A to maximum current (or its reverse), using the output terminal on the rear panel.

¹⁹ 19. 50 % or higher of the rated output voltage, the maximum current or lower, AC and AC+DC modes, THD+N. For the polyphase output, it is a specification for phase voltage setting.

²⁰ 20. For an output voltage of 100 V / 200 V, a load power factor of 1, with respect to stepwise change from an output current of 0 A to the maximum current (or its reverse). 10 % to 90 % of output voltage.

²¹ 21. For 5 Hz to 1 MHz components in DC mode using the output terminal on the rear panel.


Measured Value Display (All accuracy of the measurement function is indicated for 23 °C ± 5 °C.)

| | Single-phase output | | Polyphase output ²⁶ | | |
|--|-----------------------------------|---|--|--|--|
| Voltage ²⁷ | Resolution | 0.01 V / 0.1 V | | | |
| | RMS value accuracy | 45 Hz to 65 Hz and DC: $\pm(0.5\% \text{ of rdg} + 0.5\% \text{ of } 1\text{ V})$ 15 Hz to 550 Hz: $\pm(0.7\% \text{ of rdg} + 1\text{ V} / 2\text{ V})$ | | | |
| | AVG value accuracy | DC: $\pm(0.5\% \text{ of rdg} + 0.5\% \text{ of } 1\text{ V})$ | | | |
| | PEAK value accuracy ²⁸ | 45 Hz to 65 Hz and DC: $\pm(2\% \text{ of rdg} + 1\text{ V} / 2\text{ V})$ | | | |
| Current ²⁹ | Resolution | 0.01 A / 0.1 A | | | |
| | RMS value accuracy | 45 Hz to 65 Hz: $\pm(0.5\% \text{ of rdg} + 0.3\text{ A} / 0.15\text{ A})$ 15 Hz to 550 Hz: $\pm(0.7\% \text{ of rdg} + 0.6\text{ A} / 0.4\text{ A})$ | 45 Hz to 65 Hz: $\pm(0.5\% \text{ of rdg} + 0.15\text{ A} / 0.08\text{ A})$ 15 Hz to 550 Hz: $\pm(0.7\% \text{ of rdg} + 0.3\text{ A} / 0.15\text{ A})$ | | |
| | AVG value accuracy | DC: $\pm(0.5\% \text{ of rdg} + 0.6\text{ A} / 0.4\text{ A})$ | DC: $\pm(0.5\% \text{ of rdg} + 0.3\text{ A} / 0.15\text{ A})$ | | |
| | PEAK value accuracy ²⁸ | 45 Hz to 65 Hz and DC: $\pm(2\% \text{ of rdg} + 3\text{ A} / 1.5\text{ A})$ | 45 Hz to 65 Hz and DC: $\pm(2\% \text{ of rdg} + 1.5\text{ A} / 0.75\text{ A})$ | | |
| Power ^{27/28} | Active (W) | 0.1 W / 1 W / 10 W | | | |
| | Accuracy ²⁹ | 45 Hz to 65 Hz and DC: $\pm(2\% \text{ of rdg} + 9\text{ W})$ | 45 Hz to 65 Hz and DC: $\pm(2\% \text{ of rdg} + 3\text{ W})$ | | |
| | Resolution | 0.1 VA / 1 VA / 10VA | | | |
| | Accuracy | 45 Hz to 65 Hz: $\pm(2\% \text{ of rdg} + 18\text{ VA})$ | 45 Hz to 65 Hz: $\pm(2\% \text{ of rdg} + 6\text{ VA})$ | | |
| Reactive (VAR) | Resolution | 0.1 VAR / 1 VAR / 10VAR | | | |
| | Accuracy ²⁹ | 45 Hz to 65 Hz: $\pm(2\% \text{ of rdg} + 18\text{ VAR})$ | 45 Hz to 65 Hz: $\pm(2\% \text{ of rdg} + 6\text{ VAR})$ | | |
| | Range | 0.000 to 1.000 | | | |
| | Resolution | 0.000 | | | |
| Harmonic voltage | Range | Up to 100th order of the fundamental wave | | | |
| | Full Scale | 200 V / 400 V, 100 % | | | |
| | Effective value (rms) | 0.01 V / 0.1 V, 0.1% | | | |
| | Percent (%) | Up to 20th: $\pm(0.2\% \text{ of rdg} + 0.5\% \text{ of } 1\text{ V})$ 21th to 100th: $\pm(0.3\% \text{ of rdg} + 0.5\% \text{ of } 1\text{ V})$ | | | |
| Harmonic current | Range | Up to 100th order of the fundamental wave | | | |
| | Full Scale | 252 A / 126 A, 100 % (ASR-6600-24), 315 A / 157.5 A, 100 % (ASR-6600-30), 378 A / 189 A, 100 % (ASR-6600-36) | 84 A / 42 A, 100 % (ASR-6600-24), 105A / 52.5 A, 100 % (ASR-6600-30), 126 A / 63 A, 100 % (ASR-6600-36) | | |
| | Effective value (rms) | 0.01 A / 0.1 A, 0.1% | | | |
| | Percent (%) | Up to 20th: $\pm(1\% \text{ of rdg} + 3\text{ A} / 1\text{ A})$ 21th to 100th: $\pm(1.5\% \text{ of rdg} + 3\text{ A} / 1.5\text{ A})$ | Up to 20th: $\pm(1\% \text{ of rdg} + 1\text{ A} / 0.5\text{ A})$ 21th to 100th: $\pm(1.5\% \text{ of rdg} + 1\text{ A} / 0.5\text{ A})$ | | |
| ²⁶ (AC-INT and 50/60 Hz only) ²¹ | | | | | |

SPECIFICATIONS

| Model | ASR-6600-24 | ASR-6600-30 | ASR-6600-36 |
|---|---|---|--|
| *1. In the polyphase output, the specification is for phase voltage, and the DC average value display cannot be selected. *2. Accuracy values are in the case that the output voltage is within voltage setting range. *3. The accuracy is for output waveform DC or sine wave only. *4. Accuracy values are in the case that the output current is 5 % to 100 % of the maximum current. *5. The accuracy is for output waveform DC or sine wave only. *6. In the polyphase output, these are the specifications for each phase. *7. For an output voltage of 50 V or greater, an output current in the range of 10 % to 100 % of the maximum current. *8. The apparent and reactive powers are not displayed in the DC mode. *9. For the load with the power factor 0.5 or higher. *10. For the load with the power factor 0.5 or lower. *11. The measurement does not conform to the IEC or other standard. Phase Voltage and Phase Current. *12. For an output voltage of 10 V to 175 V / 20 V to 350 V. *13. An output current in the range of 5 % to 100 % of the maximum current. | | | |
| Others | | | |
| Protections UVP, OVP, OCP, OTP, OPP, Fan Fail, Peak and RMS Current Limit | | | |
| Display TFT-LCD, 7 inch | | | |
| Memory function Store and recall settings, Basic settings: 10 | | | |
| Arbitrary wave | Number of memories | 253 (nonvolatile) | |
| | Waveform length | 4096 words | |
| | Amplitude resolution | 16 bits | |
| General Specifications | | | |
| Interface | Standard | USB | Type A: Host, Type B: Slave, Speed: 2.0, USB-CDC / USB-TMC |
| | | LAN | MAC Address, DNS IP Address, User Password, Gateway IP Address, Instrument IP Address, Subnet Mask |
| | External | External Signal Input External Control I/O V/I Monitor Output | |
| | RS-232C | Complies with the EIA-RS-232 specifications | |
| Optional 1 | GPIB | SCPI-1993, IEEE 488.2 compliant interface | |
| | CAN Bus | Complies with CAN 2.0A or 2.0B based protocol | |
| | Optional 3 | Device Net | Complies with CAN 2.0A or 2.0B based protocol |
| Insulation resistance | Between input and chassis, output and chassis, input and output | DC 500 V, 30 MΩ or more | |
| Withstand voltage | Between input and chassis, output and chassis, input and output | AC 1500 V or DC 2130 V, 1 minute | |
| EMC | | | |
| EN 61326-1 (Class A) EN 61326-2-1/-2-2 (Class A) EN 61000-3-2 (Class A, Group 1) EN 61000-3-3 (Class A, Group 1) EN 61000-4-2/-4-3/-4-4/-4-5/-4-6/-4-8/-4-11 (Class A, Group 1) EN 55011 (Class A, Group1) | | | |
| Safety | | | |
| Environment | Operating environment | Indoor use, Overvoltage Category II | |
| | Operating temperature range | 0 °C to 40 °C | |
| | Storage temperature range | -10 °C to 70 °C | |
| | Operating humidity range | 20 %rh to 80 % RH (no condensation) | |
| | Storage humidity range | 90 % RH or less (no condensation) | |
| | Altitude | Up to 2000 m | |
| Dimensions (mm) (not including protrusions) | | 598(W)×1294(H)×906(D) | 598(W)×1472(H)×906(D) |
| Weight | | Approx. 250 kg | Approx. 305 kg |
| A value with the accuracy is the guaranteed value of the specification. However, an accuracy noted as reference value shows the supplemental data for reference when the product is used, and is not under the guarantee. A value without the accuracy is the nominal value or representative value (shown as typ.). Product specifications are subject to change without notice. | | | |

Dimensions(mm)

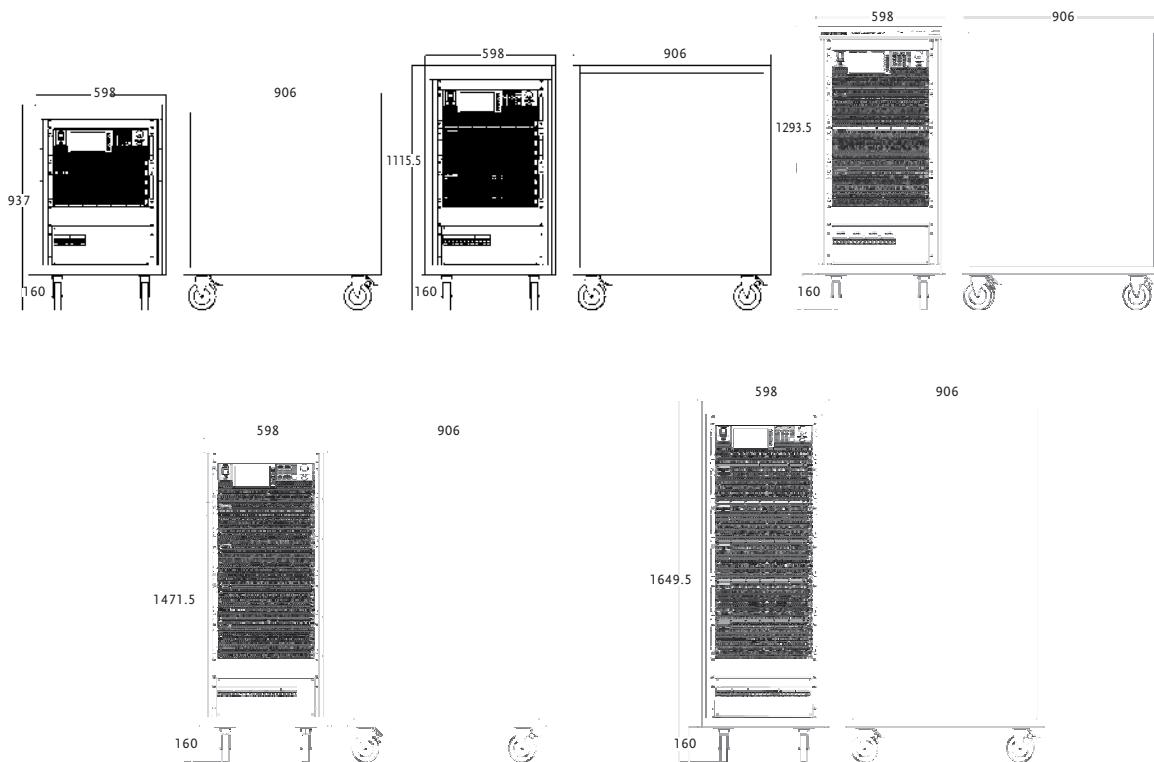

ASR-6600-24 (Four units)

ASR-6450-13.5/6600-18 (Three units)

ASR-6450-09/6600-12 (Two units)



ASR-6600-36 (Six units)

ASR-6600-30 (Five units)



Specifications subject to change without notice. ASR-6000ID2BH

ORDERING INFORMATION

ASR-6450 4.5 kVA High-Performance AC/DC Power Supply
ASR-6450-09 9 kVA AC/DC Rack Type Power Source
ASR-6450-13.5 13.5 kVA AC/DC Rack Type Power Source
ASR-6600 6 kVA High-Performance AC/DC Power Supply
ASR-6600-12 12 kVA AC/DC Rack Type Power Source
ASR-6600-18 18 kVA AC/DC Rack Type Power Source
ASR-6600-24 24 kVA AC/DC Rack Type Power Source
ASR-6600-30 30 kVA AC/DC Rack Power Source
ASR-6600-36 36 kVA AC/DC Rack Power Source

ACCESSORIES

Input terminal cover, Output terminal cover,
Copper plate for delta connection input(Mark 1),
Copper plate for single phase and Y connection input(Mark 2),
Copper plate for delta connection input(Mark 3),
Copper plate for 1P output(Mark 4),
GRA-451-E Rack mount adapter(EIA)(Stand-alone models only)
CTL-246 USB cable (USB 2.0 Type A - Type B cable, approx. 1.2 M)

OPTION ACCESSORIES

ASR-003 GPIB Interface Card
ASR-004 DeviceNet Interface Card
ASR-005 CAN BUS Interface Card
ASR-C003 Modbus TCP feature
GTL-232 RS-232C Cable, approx. 2 M
GTL-248 GPIB Cable, approx. 2 M
For ASR-6450/ASR-6600 use only :
GET-006 Universal Extension
ASR-006 External Parallel Cable
GRA-451-E Rack mount adapter(EIA)
GRA-451-J Rack mount adapter(JIS)
GPW-008 6RV3 Power Cord; 10 AWG/3 C, 3 m Max Length, RVS-5*3P, RVS-5*3P UL Type
GPW-012 6RVV5 VDE Power Cord; 2.5 mm 2/5 C, 3 m Max Length, RVS3-5*5P, RVS3-5*5P VDE Type
GPW-013 6RVT5 PSE Power Cord; 2.0 mm 2/5 C, 3 m Max Length, RVS2-5*5P, RVS2-5*5P PSE Type
GPW-014 6RV4 UL Power Cord; 10 AWG/4 C, 3 m, RVS-5*4P, RVS-5*4P UL TYPE
GPW-015 6RVV4 VDE Power Cord; 2.5 mm 2/4 C, 3 m Max Length, RVS3-5*4P, RVS3-5*4P VDE Type