

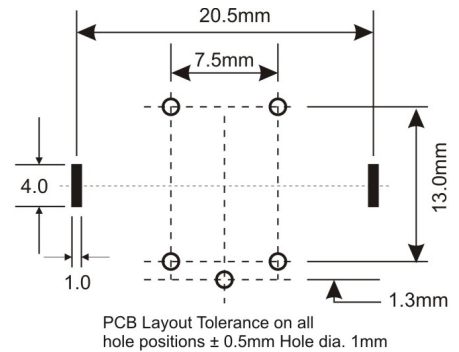

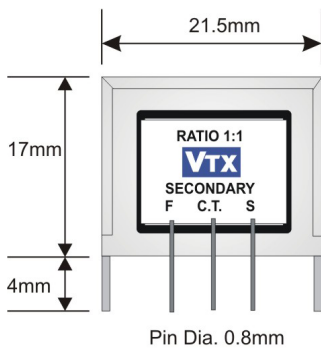


### Features:

- Cost effective Audio Line transformer
- Impedance Line Matching 800:800  $\Omega$  C.T.
- Off Centre C.T Pin
- Dielectric strength: >500Vrms.
- RoHS Compliant
- Custom Configurations on Request.

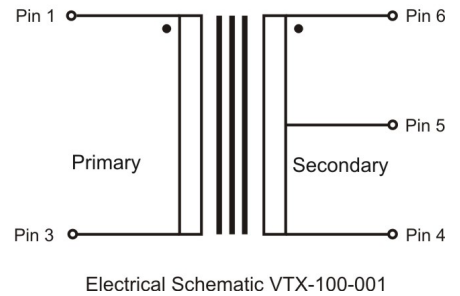

**Dimensions:**  
 Height : 17mm  
 Width: 21.5mm  
 Length : 16.0mm  
 Weight : 0.015kg



Part No	VTX-101-1606			Unit
Primary Impedance (Ref 1k Ohms)	800			ohms
Secondary Impedance	800 C.T			ohms
D.C. Resistance +/-15%, PRI	63			ohms
D.C. Resistance +/-15%, SEC	84			ohms
Inductance , PRI min.	1.7			H
Inductance , SEC min	0.42 + 0.42			H
Dielectric Test PRI-SEC	900			V AC
Direct Current PRI, maximum	none			mA DC
Turns Ratio (PRI:SEC), +/-2%	1:1 C.T			-----
Freq. Resp. 200 ~ 15k Hz, 2mW	+/-0.5			dB

Products can be altered to suite custom requirements. Please contact Vigortronix for your specific requirements.  
 The information contained in this document is subject to change without notice.