


STEVAL-IPMnM1N

Motor control power board based on the SLLIMM-nano 2nd series

Data brief



Features

- Input voltage: from 125 to 400 V_{DC}
- Nominal power: up to 60 W
- Nominal current: up to 0.6 A_{rms}
- Input auxiliary voltage: up to 20 V_{DC}
- Single- or three-shunt resistors for current sensing (with sensing network)
- Three options for current sensing: dedicated external op-amps, internal SLLIMM-nano op-amp (single) or via MCU
- Overcurrent hardware protection
- IPM temperature monitoring and protection
- Hall sensor or encoder input
- IGBT intelligent power module:
 - 2nd series SLLIMM-nano IPM MOSFETbased (STIPN1M50T-H – full molded package)
- Motor control connector (32 pins) interfacing with ST MCU boards
- Universal design for further evaluation with bread board and testing pins

- Very compact size
- RoHS compliant

Description

The STEVAL-IPMnM1N is a compact motor drive power board based on SLLIMM™-nano (small low-loss intelligent molded module) 2nd series MOSFET-based product (STIPN1M50T-H) . It provides an affordable and easy-to-use solution for driving high power motors in a wide range of applications such as power white goods, air conditioning, compressors, power fans and 3-phase inverters for motor drives in general.

The IPM itself consists of short-circuit rugged MOSFETs and a wide range of features like undervoltage lockout, smart shutdown, internal temperature sensor and NTC, overcurrent protection and internal op-amp.

The main characteristics of this evaluation board are small size, minimal BOM and high efficiency. It features an interface circuit (BUS and $V_{\rm CC}$ connectors), bootstrap capacitors, snubber capacitor, hardware short-circuit protection, fault event signal and temperature monitoring. It is designed to work in single- or three-shunt configuration and with triple current sensing options: three dedicated on-board op-amps, opamps embedded on MCU or single internal IPM op-amp. The Hall/Encoder part completes the circuit.

The system is designed to achieve accurate and fast conditioning of current feedback to satisfy the typical requirements for field oriented control (FOC).

The STEVAL-IPMnM1N is compatible with ST's control board based on STM32, providing a complete platform for motor control.

Schematic diagrams

Figure 1: STEVAL-IPMnM1N circuit schematic (1 of 5)


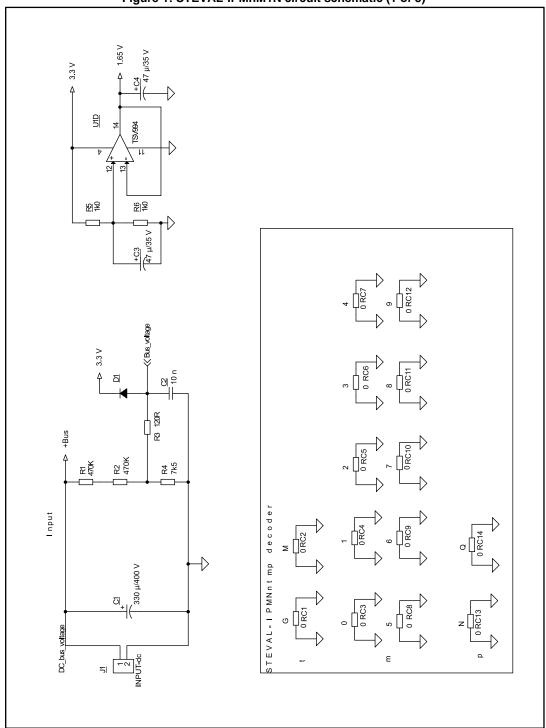


Figure 2: STEVAL-IPMnM1N circuit schematic (2 of 5)

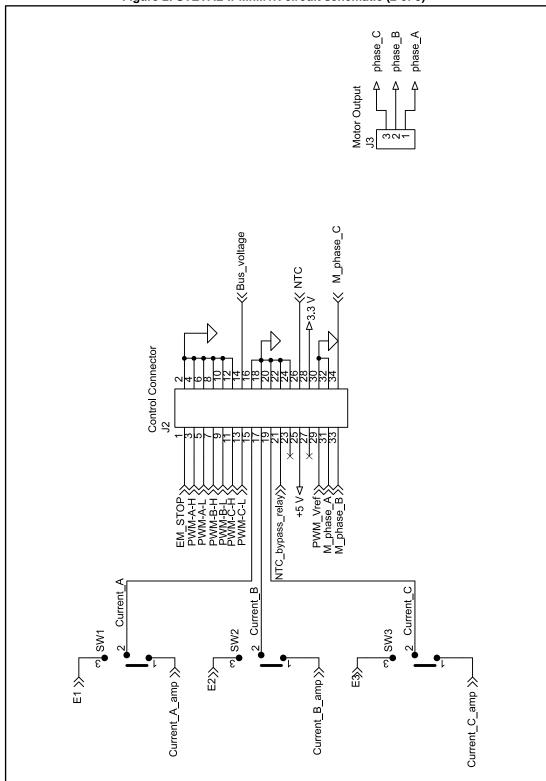

Schematic diagrams STEVAL-IPMnM1N

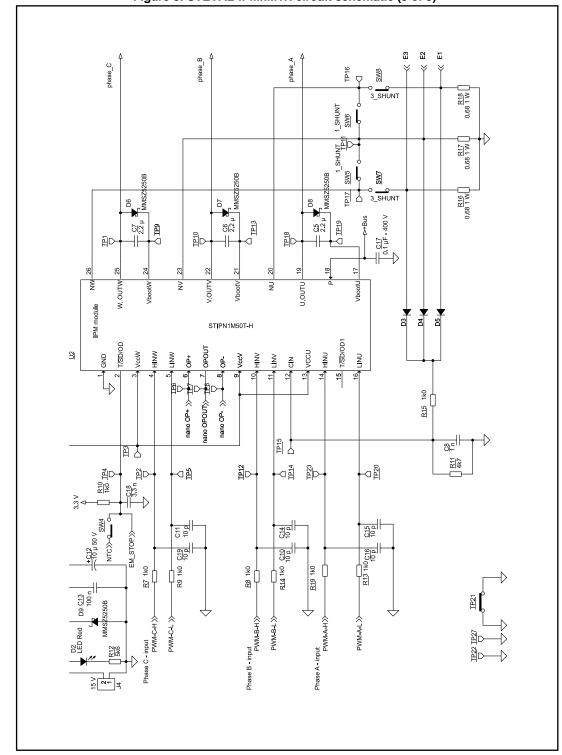


Figure 3: STEVAL-IPMnM1N circuit schematic (3 of 5)

3.3 V Nano OPOUT≫ 110 R43 | ≠ R25 1k9 1k9 19/19/19/19 140 1k0 R26 1.65 V R27 330p 33 ∨ 3.3 V R22 R31 100 n C21 4.7 μ 50 V + | + | + | + | TSV994 U1A U1B R33 1k9 R28 1k9 R20 1k9 R24 1k9 100 p 1k0 R32 R21 R23 1.65 V

Figure 4: STEVAL-IPMnM1N circuit schematic (4 of 5)

R42 4k7 SW15 (表 7 SW14 0 5 R40 4K7 SW13 O C37 10 p R36 4k7 R35 4k7 10 p Hall/Encoder 10 p ₹ 7 2k4 2k4 R37 100 n ω SW16 6MS ω Encoder/Hall -0e4g 3.3 V

Figure 5: STEVAL-IPMnM1N circuit schematic (5 of 5)

STEVAL-IPMnM1N Revision history

Revision history

Table 1: Document revision history

Date	Version	Changes
05-Sep-2017	1	Initial release.

IMPORTANT NOTICE - PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics - All rights reserved

