

Contents

- 1 Overview
- 2 Applications
- 3 Specifications
- 4 External Links

Overview

This xCHIP features an SC18IS602B SPI/I²C converter IC for handling radio operations, the on-board RFM95W LoRa™ module provides ultra-long range spread spectrum communication and high interference immunity whilst minimizing current consumption.

Product Highlights

- 868 MHz Range (Software Selectable Center Frequency)
- LoRa™ Modem
- 168 dB maximum link budget.
- +20 dBm - 100 mW constant RF output vs. V supply.
- +14 dBm high efficiency PA.
- Programmable bit rate up to 300 kbps.
- High sensitivity: down to -148 dBm

Applications

- Remote Sensing
- Home Automation
- Satellite Telemetry

Specifications

RFM95W

- 168 dB maximum link budget.
- +20 dBm - 100 mW constant RF output vs. V supply.
- +14 dBm high efficiency PA.
- Programmable bit rate up to 300 kbps.
- High sensitivity: down to -148 dBm.
- Bullet-proof front end: IIP3 = -12.5 dBm.
- Excellent blocking immunity.
- Low RX current of 10.3 mA, 200 nA register retention.
- Fully integrated synthesizer with a resolution of 61 Hz.
- FSK, GFSK, MSK, GMSK, LoRa™ and OOK modulation.
- Built-in bit synchronizer for clock recovery.
- Preamble detection.
- 127 dB Dynamic Range RSSI.
- Automatic RF Sense and CAD with ultra-fast AFC.
- Packet engine up to 256 bytes with CRC.

SC18IS602B

- I²C-bus slave interface operating up to 400 kHz
- SPI master operating up to 1.8 Mb/s
- 200-byte data buffer
- Low power mode
- Internal oscillator option

External Links


GitHub

- RL02 on GitHub (<https://github.com/xinabox/xRL02>)

RL02 - LoRa Radio (868 MHz)
(RFM95W/RFM95, SC18IS602B)



Front

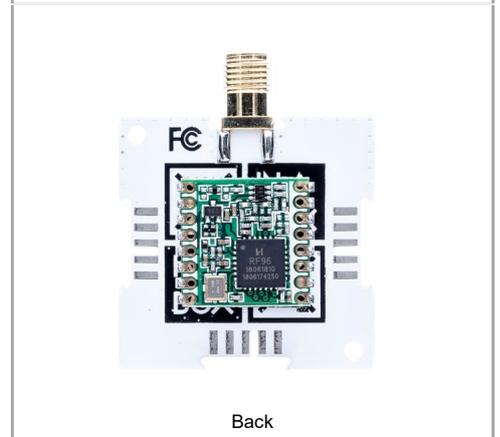

Back

☒CHIP	
Main Category	Radio
Sub Category	LoRa
Introduced	1 January 2017
Current version	1.0.0
Current version date	1 January 2017
Dimensions	
Size	2x2U (32x32mm)
Weight	5.3 g
Height	7.9/1/1.8 mm
Non-☒BUS Connections	
North	SMA Female Connector (7.5 mm)
Main Chip Set	
Main Chip	SC18IS602B
I²C Speed	100/400 kHz