



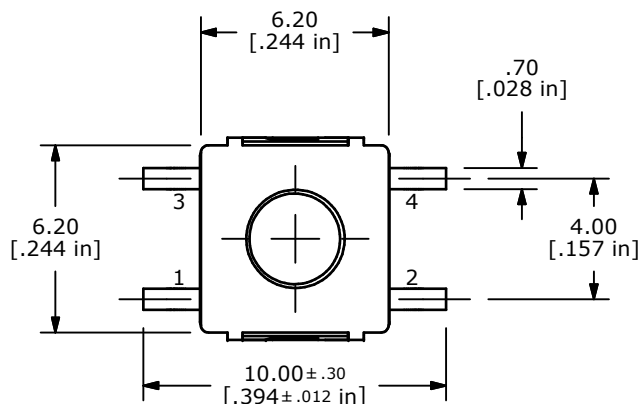


RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

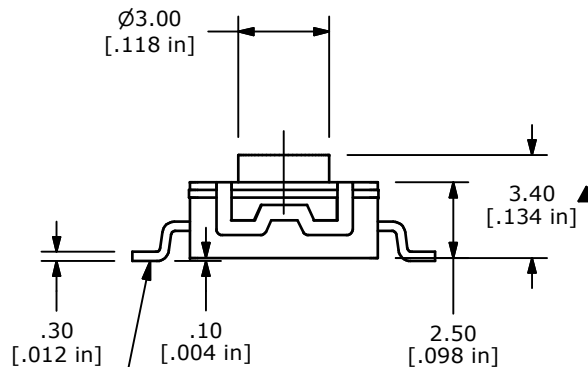


NOTES:

- 1. ALL DIMENSIONS IN MM [INCH]
- 2. GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
- 3. TERM. NOS. FOR REF ONLY
- 4. RATING: 50 MILLI-AMPS @12VDC
- 5. TRAVEL: 0.25 +0.2/-0.1MM
- 6. CONTACT RESISTANCE: 100mΩ MAX (E)
- ▲ 7. OPERATING FORCE: 160 ± 50 GF
- 8. PACKAGING: TAPE AND REEL, 1000 PIECES PER REEL
- 9. LIFE CYCLES: 100,000 ACTUATIONS
- 10. ▲ DENOTES CRITICAL PARAMETER
- 11. 2002/95/EC (ROHS) COMPLIANT
- 12. OPERATING TEMPERATURE: -20°C TO 70°C
- ▲ 13. CONTACT MATERIAL: SILVER (E)

(E) ▲ TERMINALS TO BE COPLANAR WITHIN 0.10mm MAX.

F	21086	12.0 MIN WAS 12.0, 7.0 MAX WAS 5.8	3/27/13	EBP
E	21024	100mΩ WAS 100Ω, ADD SILVER NOTE	2/12/13	EBP
D	20991	REDRAW, ADD TERMINAL COPLANAR	1/29/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

				
TITLE TL3304AF160QG				
SCALE	DATE	DR	DWG	REV
	1/29/2013	EBP	P010538	F