





Number of poles	Nr.	3
Operating voltage type		AC
<b>Contact characteristics</b>		
IEC Conventional free air thermal current I <sub>th</sub>	A	100
<b>UL technical data</b>		
UL Standard		UL98
<b>Dimensions</b>		

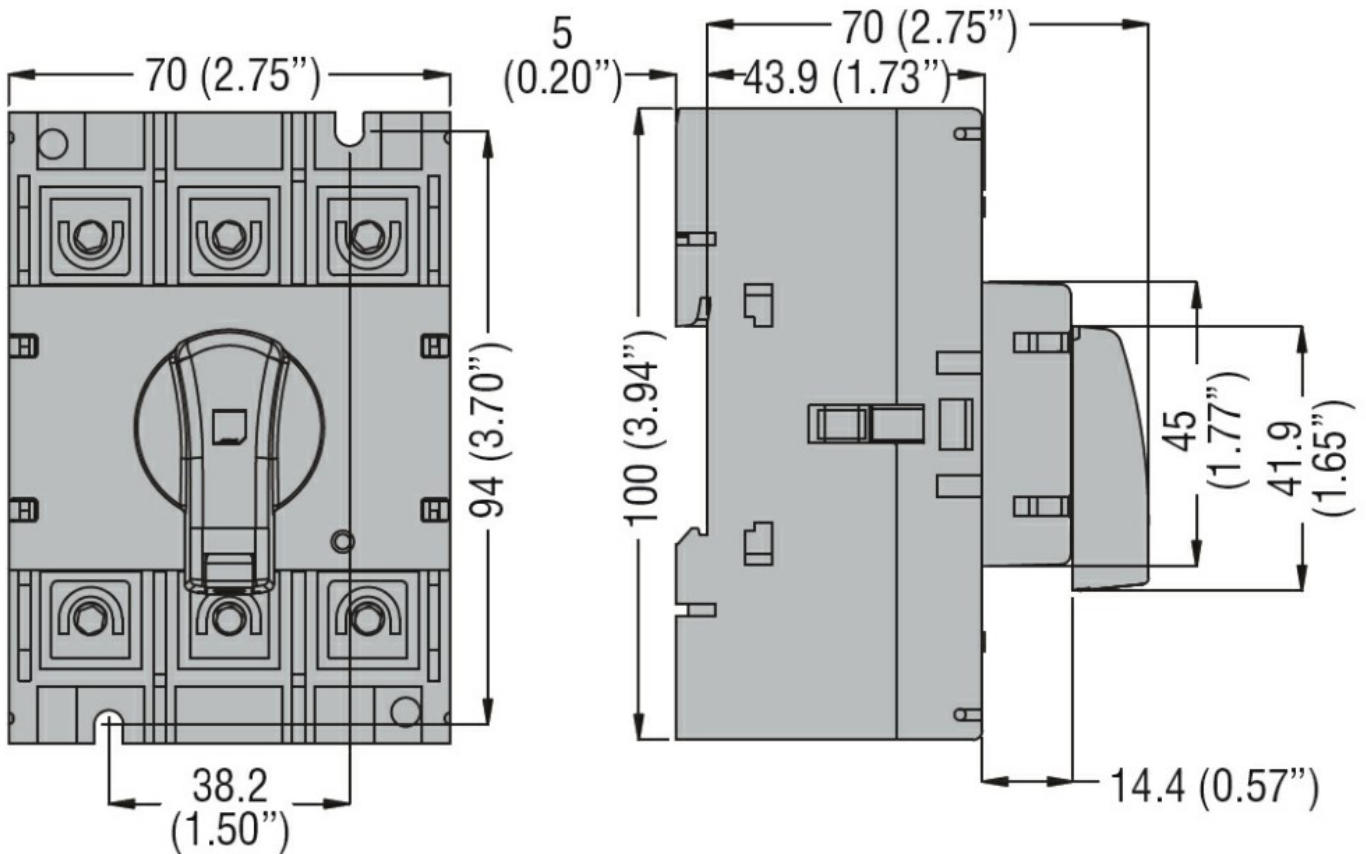

**Wiring diagrams**



**Certifications and compliance**

**Compliance**

CSA C22.2 n°4

IEC/EN 60947-1

IEC/EN 60947-3

UL98

Certifications

CCC

CSA C22.2 n°4

cULus according to UL98

EAC

ETIM classification

ETIM 8.0

EC000216 -  
Switch  
disconnecter