
#### **Switching amplifier**

N200/SA-2 110-240VAC






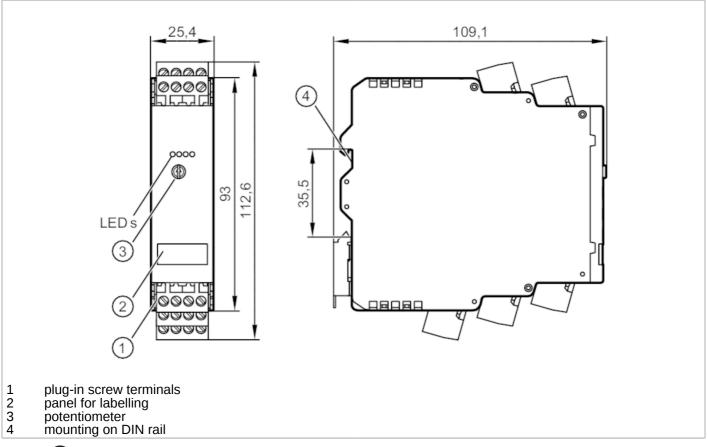

Product characteristics			
Housing		housing for DIN rail mounting	
Application			
Application		Power supply and signal evaluation	
Electrical data			
Nominal voltage AC	[V]	110240	
Nominal voltage tolerance	[%]	> 20	
Nominal voltage tolerance 2	[%]	2010	
Nominal frequency AC	[Hz]	5060	
Insulation rating	[V]	9	
Max. power consumption AC	[W]	11	
Auxiliary energy for sensors DC	[V]	24; (SELV, ± 10 %, 2 x ≤ 150 mA)	
Number of channels		2	
Inputs / outputs			
Number of inputs and outputs		Number of relay outputs: 2	
Outputs			
Number of relay outputs		2	
Contact rating		4 A (240 V AC, 24 V DC); (ohmic resistance)	

## Switching amplifier





Operating conditions				
Ambient temperature	[°C]	-2060		
Storage temperature	[°C]	-2570		
Max. relative air humidity	[%]	80; (40 °C: 50 % non condensing)		
Max. height above sea level	[m]	3000		
Protection		IP 20		
Protection rating terminals		IP 20		
Degree of soiling	gree of soiling 2; (≤ 240 V AC)		0 V AC)	
Tests / approvals				
MTTF	[years]	23	1.5	
Mechanical data				
Weight	[g]	24	11	
Housing		housing for DIN rail mounting		
Type of mounting rail; (TH35 EN 60715)		EN 60715)		
Materials		plastics: PC-GF20		
Displays / operating elemen	nts			
		voltage supply	1 x LED, green	
Display		Output	2 x LED, yellow	
		errors	1 x LED, red	
Accessories				
Accessories (supplied)	ccessories (supplied) connector: 5 x 4-wire, with screw connection, E40173			

### **Switching amplifier**


N200/SA-2 110-240VAC



### Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

#### Connection

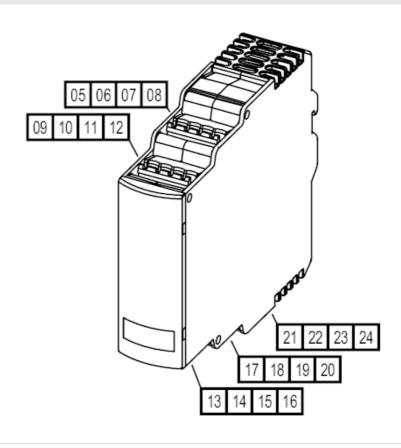

## Switching amplifier

N200/SA-2 110-240VAC



05	relay 1 normally open	
06	relay 1 common	
07	relay 1 common	
08	relay 1 normally closed	
09	DC Sensor supply 1 (+)	
10	sensor signal 1 pnp/npn	
11	not used	
12	DC Sensor supply 1 (-)	
13	DC Sensor supply 2 (+)	
14	sensor signal 2 pnp/npn	
15	not used	
16	DC Sensor supply 2 (-)	
17	relay 2 normally open	
18	relay 2 common	
19	relay 2 common	
20	relay 2 normally closed	
21	AC supply voltage (L)	
22	AC supply voltage (L)	
23	AC supply voltage (N)	
24	AC supply voltage (N)	