

## Specifications

Pitch:	7.5mm
Type:	Rising Clamp
Poles:	2 to 12
Rated Voltage:	See Table
Rated Current:	See Table
Operational Temperature:	-40°C to +105°C
Withstand Voltage:	2000V AC for 60s
Insulation Resistance:	500MΩ at 500V DC
Wire Range:	See Table
Wire Stripping Length:	6-7mm ± 0.5mm
Screw Size:	M2.5
Max. Torque Value:	0.4Nm
Wave Soldering:	260°C for 5s
Hand Soldering:	350°C for 10s






Order Code	Poles	Order Code	Poles
21-3017	2	21-2958	8
21-3018	3	21-2959	9
21-2954	4	21-2960	10
21-2955	5	21-2961	11
21-2956	6	21-2962	12
21-2957	7		

## Colour and Materials

Housing Colour:	Green
Housing Material:	PA66
Flame Retardancy:	UL94-V0
Screw:	Zinc-plated steel (A3)
Wire Cage:	Nickel-plated brass
Pin Header:	Tin-plated brass

Standard	Rated Voltage	Rated Current	Wire Range
UL	300V	15A	24-12AWG
IEC	450V	18A	2.5mm <sup>2</sup>

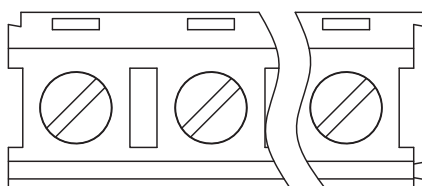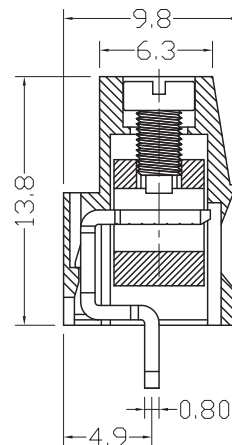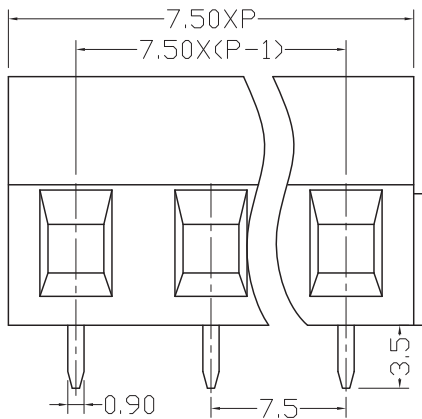

Measurements are in mm  
unless stated otherwise.  
Tolerance: ±0.2

