

SIRIUS POSITION SWITCH; PLASTIC ENCLOSURE ACC. TO EN 50047; 31MM SUITABLE FOR MINUS 40 DEGREES, DEVICE CONNECTION 1X(M20X1.5); 1NO/1NC QUICK-ACTION CONTACTS INTEGRATED (NOT REPLACEABLE) ROD LEVER PLASTIC ROD 200MM

| | |
|---------------------|--------------------------|
| Product designation | standard position switch |
|---------------------|--------------------------|

General technical data:

| | | |
|--|--------|------------|
| Product function | | No |
| <ul style="list-style-type: none"> • positive opening | | |
| Insulation voltage | | |
| <ul style="list-style-type: none"> • Rated value | V | 400 |
| Degree of pollution | | class 3 |
| Surge voltage resistance Rated value | kV | 6 |
| Mechanical service life (switching cycles) | | |
| <ul style="list-style-type: none"> • typical | | 15 000 000 |
| Electrical endurance (switching cycles) | | |
| <ul style="list-style-type: none"> • at AC-15 at 230 V typical | | 100 000 |
| Electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical | | 10 000 000 |
| Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 | | 6 000 |
| Thermal current | A | 6 |
| Material of the enclosure of the switch head | | plastic |
| Protection class IP | | IP65 |
| Equipment marking | | |
| <ul style="list-style-type: none"> • acc. to DIN EN 61346-2 • acc. to DIN EN 81346-2 | | B B |
| Active principle | | mechanical |
| Repeat accuracy | mm | 0.05 |
| Explosion protection category for dust | | none |
| Explosion protection category for gas | | none |
| Minimum actuating torque in activation direction | N·m | 0.25 |
| Operating current at AC-15 | | |
| <ul style="list-style-type: none"> • at 230 V Rated value • at 400 V Rated value | A A | 6 4 |
| Operating current | | |

| | | |
|---------------------------------|---|------|
| • at DC-13 at 125 V Rated value | A | 0.55 |
| • at DC-13 at 400 V Rated value | A | 0.1 |
| Operating current | | |
| • at DC-13 | | |
| — at 24 V Rated value | A | 3 |

| | | |
|---|--|---------------|
| Enclosure: | | |
| Design of the housing | | block, narrow |
| Material of the enclosure | | plastic |
| Coating of the enclosure | | Other types |
| Design of the housing acc. to standard | | Yes |

| | | |
|--|--|------------------------------------|
| Drive Head: | | |
| Design of the operating mechanism | | rod actuator, plastic, 200 mm long |
| Standard-compliant actuator head | | EN 50047, design A |

| | | |
|--|--|---|
| Connections/ Terminals: | | |
| Type of electrical connection | | screw-type terminals |
| Type of connectable conductor cross-section | | |
| • solid | | 1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 0.75 mm ²) |
| • finely stranded with core end processing | | 1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 0.75 mm ²) |
| • finely stranded without core end processing | | 1x (0.5 ... 1.5 mm ²), 2x (0.5 ... 0.75 mm ²) |
| • for AWG conductors | | |
| — solid | | 1x (20 ... 16), 2x (20 ... 18) |
| — stranded | | 1x (20 ... 16), 2x (20 ... 18) |

| | | |
|-------------------------|--|----------------|
| Mechanical data: | | |
| Cable entry type | | 1x (M20 x 1.5) |

| | | |
|---------------------------------|--|---------|
| Communication/ Protocol: | | |
| Design of the interface | | without |

| | | |
|----------------------------|----|-------------|
| Ambient conditions: | | |
| Ambient temperature | | |
| • during operation | °C | -40 ... +85 |
| • during storage | °C | -40 ... +90 |

| | | |
|--|--|--------------|
| Installation/ mounting/ dimensions: | | |
| mounting position | | any |
| Mounting type | | screw fixing |

| | | |
|---------------------------------|--|--|
| Certificates/ approvals: | | |
|---------------------------------|--|--|



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3SE52320HK821AY0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SE52320HK821AY0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3SE52320HK821AY0&lang=en

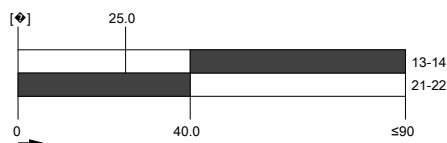

last modified:

09.03.2015