

RoHS
Compliant



Features

- 850V DC automotive fuse
- Rated Current: 30A to 40A
- Rated Breaking Capacity: 20kA at 850V DC
- Time Constant: 1ms to 3ms
- Size: 10mm × 38mm
- General purpose fuse for EV/HEV auxiliary protection
- Ref. to UL248-20; ISO 8820-8; JASO D622; GB/T 31465.6
- TUV Approved
- Recommended fuse holder: BH114

Electrical Characteristics


Part Number	Rated Current A	Rated Voltage	Breaking capacity
MP006266	30	850V DC	20kA @ 850V DC
MP006267	40		

Note: Operational Temperature Range: -40°C to 125°C

Time Vs Current Characteristic

Rated Current	110%	135%	150%	200%	300%	500%
30A to 40A	>4 h	150s - 1h	10-1000s	0.5-100s	0.1-15s	0.05-1s


Diagram

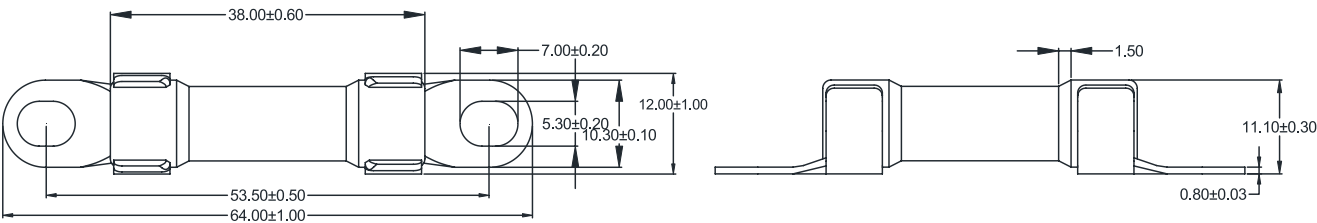

Dimensions : Millimetres

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

Time Current Curve

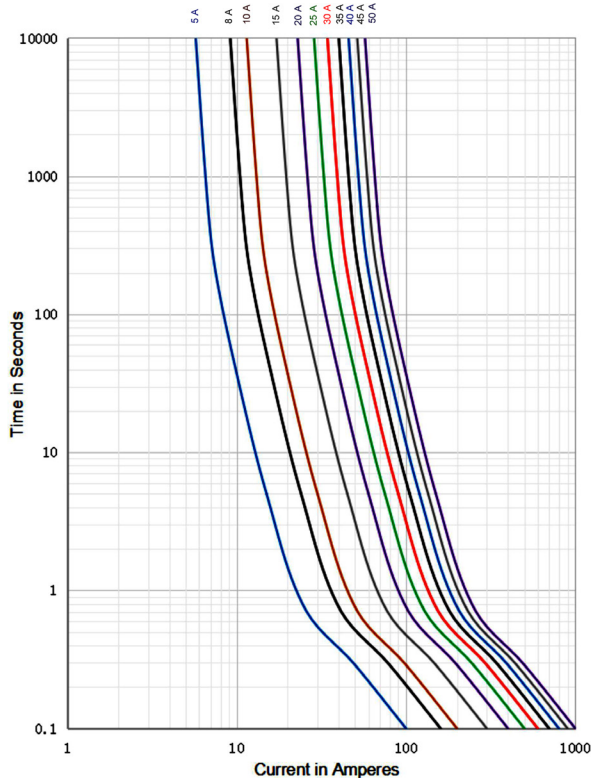

Part Number Table

Description	Part Number
Automotive EV Fuse, 30A, 850V DC, Stud Mount	MP006266
Automotive EV Fuse, 40A, 850V DC, Stud Mount	MP006267

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.