

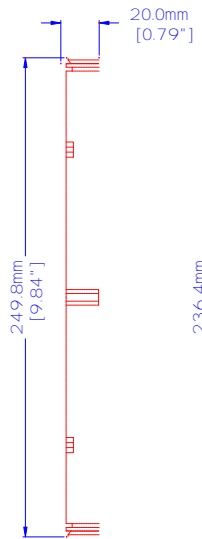





NOTES



- MATERIAL: - SUS 304 WITH BRASS INSERTS & M3 SCREWS.
- STYRENE SELF TAPPING SCREWS
- VILKIN LOCK & GRAY



HIDDEN LINE INDICATES
THE BE COVERED BY
ENCLOSURE SLOT

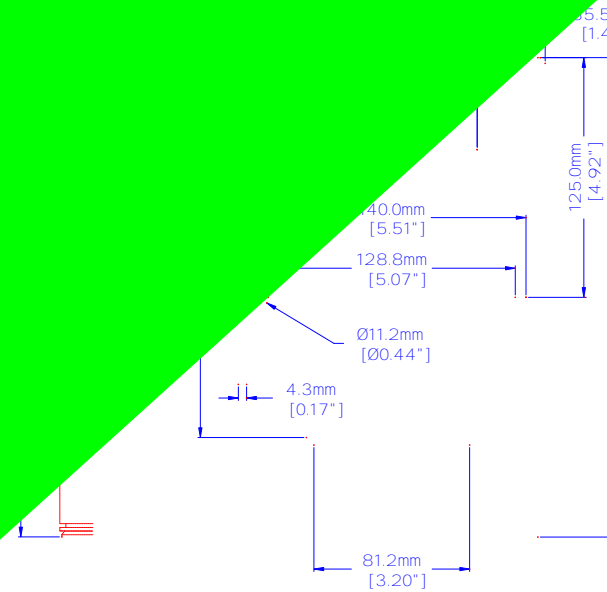

C SECT

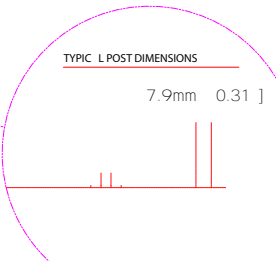

HMMOND MANUFACTURING

1598F

we e: nd fg m