


Data sheet for General Purpose Toroidal Transformers – 160VA Encapsulated Series

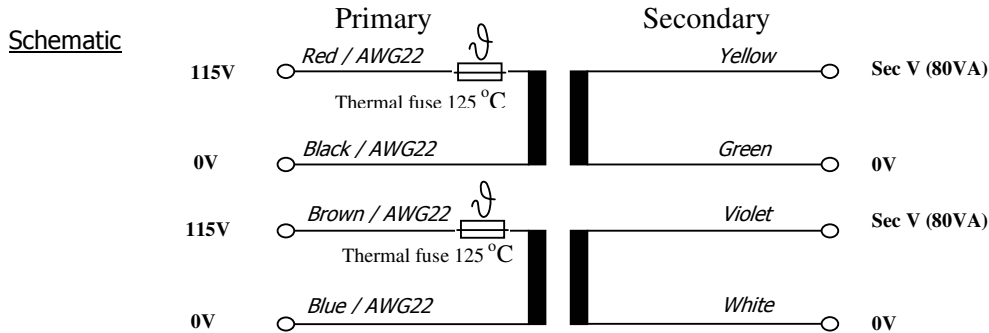

Primary

Dual Primary winding for connection in series or parallel only.
 Input voltage : 115V or 230V +/-10% 50/60 Hz
 Dc resistance : 2 x 5,0Ohms +/-20% @ 20 °C
 Magnetising current : 11,5mA @ primary 230V 50Hz
 23mA @ primary 115V 50Hz

Losses

Iron loss : 1,36 Watts
 Copper loss : 13,56Watts
 Efficiency : 91% Typical
 Calculated Temperature rise : 50 °C
 (In open environment)
 Maximum rated ambient : 40 °C

Termination

All leads UL1015 or UL1569 rated 300V / 105°C
 Primary leads Double insulated with Insulation Class B tubes, minimum length 20mm
 Lead length Tolerance +/-10mm
 all lead ends 6mm tinned
 All Leads exit close to the outer top edge,

Temperature ratings

Winding wire : Class H (180 °C)
 Insulation System : Class B (130 °C)
 Leads insulation : Class A (105 °C)
 Encapsulation : Class A (105 °C)
 Overall : Class A
 Degrees of protection : IP20

Ordering code	Art. No.	Load voltage	No load voltage	Rated current	Secondary wire gauge	Sec. DC resistance Ohms @ 20 °C +/-20%
TI-044226-ME-EC	EC0160/12	2 x 12V	2 x 13V	2 x 6,67A	AWG14	2 x 0,12
TI-044227-ME-EC	EC0160/15	2 x 15V	2 x 16,2V	2 x 5,33A	AWG16	2 x 0,11
TI-044228-ME-EC	EC0160/18	2 x 18V	2 x 19,5V	2 x 4,44A	AWG16	2 x 0,16
TI-044229-ME-EC	EC0160/25	2 x 25V	2 x 27,1V	2 x 3,2A	AWG18	2 x 0,31
TI-044230-ME-EC	EC0160/30	2 x 30V	2 x 32,5V	2 x 2,67A	AWG18	2 x 0,46
TI-044231-ME-EC	EC0160/55	2 x 55V	2 x 59,6V	2 x 1,45A	AWG20	2 x 1,51

Approx. Dimensions

Diameter : 115mm
 Height : 54mm
 Center Hole suitable for M6 screw
 Weight : 2,0kg

Standards

Designed and manufactured in accordance with : EN61558-1 / EN61558-1/A1 / EN61558-2-4 or EN61558-2-6
 UL recognised under family approval E115159 to UL1411,UL60601-1,UL1950.

Marking

Model number xxxxxxxx ta40/A IP20
 Prim. 2 x 115V 50Hz (lead colours) Fuse XXAT
 Thermal fuse 125 °C
 Sec. 2 x rated voltage and rated current Amp (ref. Above table) Fuse XXAT
 Art. No. EC0160/XX

