
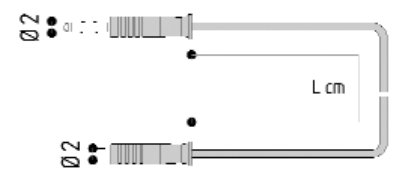
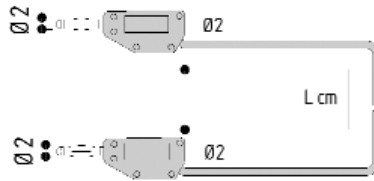


Ø 2 mm male - male lead  
Cordon simple mâle - mâle Ø 2 mm  
Standardmessleitung - Ø 2 mm Stecker / Ø 2 mm Stecker

Rear output Ø 2 mm male - male lead  
Cordon à reprise arrière, mâle - mâle Ø 2 mm  
Stapelbare Messleitung - Ø 2 mm Stecker / Ø 2 mm Stecker


Ø 2 mm male - female lead  
Cordon simple, mâle - femelle Ø 2 mm  
Standardmessleitung - Ø 2 mm Stecker / Ø 2 mm Buchse

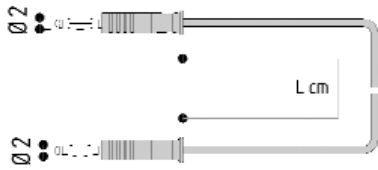

**Type 1**

**Type 2**

**Type 3**



Type	Reference Référence Bestell-Nr	L cm	Wire Câble Litze	Max current I admissible Bemessungs- strom	Voltage Tension Bemessungs- spannung	m Ω maxi	Pack	Colours Couleurs Farben #					
1	212 - 10 - #	10	PVC 0,40 mm <sup>2</sup> T °C - 20 + 80	6 A	< 33 V AC < 70 V DC	10	10	R					
	212 - 25 - #	25						N					
	212 - 50 - #	50						Bl					
	212 - 100 - #	100						V					
	2	216 - 10 - #	10					Silicone 0,40 mm <sup>2</sup> T °C - 60 + 180 (pic + 230)	6 A	< 33 V AC < 70 V DC	10	10	N
		216 - 25 - #	25										Bl
		216 - 50 - #	50										V
		216 - 100 - #	100										Y
2	214 - 10 - #	10	PVC 0,40 mm <sup>2</sup> T °C - 20 + 80	6 A	< 33 V AC < 70 V DC	10	10	R					
	214 - 25 - #	25						N					
	214 - 50 - #	50						Bl					
	214 - 100 - #	100						V					
	3	226 - 10 - #	10					Silicone 0,40 mm <sup>2</sup> T °C - 60 + 180 (pic + 230)	6 A	< 33 V AC < 70 V DC	10	10	N
		226 - 25 - #	25										Bl
		226 - 50 - #	50										V
		226 - 100 - #	100										Y
3	212 - 209 - 10 - #	10	PVC 0,40 mm <sup>2</sup> T °C - 20 + 80	6 A	< 33 V AC < 70 V DC	10	10	R					
	212 - 209 - 25 - #	25						N					
	212 - 209 - 50 - #	50						Bl					
	212 - 209 - 100 - #	100						V					
	3	216 - 209 - 10 - #	10					Silicone 0,40 mm <sup>2</sup> T °C - 60 + 180 (pic + 230)	6 A	< 33 V AC < 70 V DC	10	10	N
		216 - 209 - 25 - #	25										Bl
		216 - 209 - 50 - #	50										V
		216 - 209 - 100 - #	100										Y

**Material :**  
Contacts : Brass and CuBe / Ni (Au / Ni feasible)  
Insulators : Polyamide / Polyoxymethylene

**Matière :**  
Contacts : Laiton et CuBe / Ni (Au / Ni possible)  
Isolants : Polyamide / Polyoxyméthylène

**Material :** Kontakte : und Messing vernickelt /  
Gold auf Anfrage  
**Isolation :** Polyamid / Polyoxymethylen