




Detectable Cable ties

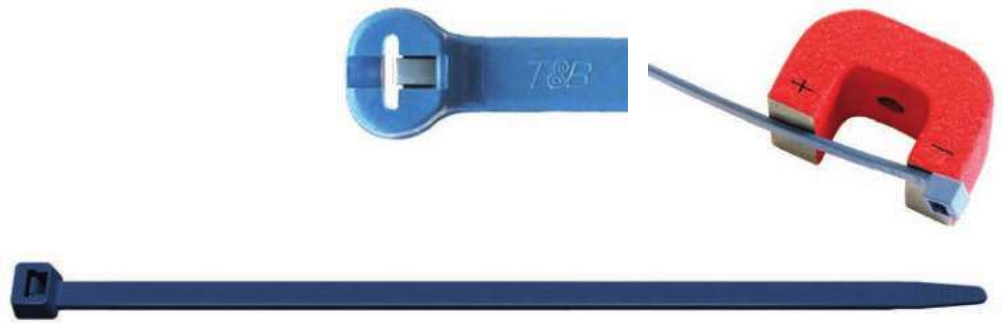

Benefits

- Detectable cable ties with an unique compound that can be detected by X-Ray equipment, metal detectors and visual inspection equipment
- Minimize the risk of product contamination
- The colour blue facilitates visual detection
- Help achieve the HACCP EU-Directive
- Polyamid version: resistant to conventional solvents such as alcohol and ketone, aliphatic and aromatic hydrocarbons such as oil, grease, gasoline and weak alkalis; not resistant to acids (weak or strong) and metallic salts
Polypropylene version: especially resistant against chemical detergents

Application range

- Are particularly recommended for applications using detection systems, where cable tie installation residuals (cut tails) are not allowed in the finished product
- Food and beverage industry, especially for production and processing equipment of milk and meat products
- Pharmaceutical production

Norm references / Approvals

- Flammability class:
Ty-Rap® NDT: UL 94 V-2
Ty-Rap® PDT and Detect: UL 94 HB
- Only the cable ties with steel nose are ECOLAB certified

Note

- Storage requirements: nylon (polyamide) is, by its nature, susceptible to external influences. Cable ties are mechanically moistened in order to ensure optimal use. As such, they must be stored in a cool, dry location and must not be exposed to direct sunlight. Cable ties are packed in plastic bags to retain moisture; these should remain closed until the cable ties are used

Suitable tools

- Ty-Gun ERG 50 / Ty-Gun ERG 120 Cable tie pliers refer to page 1009

Technical data

- Classification ETIM 5/6**
 ETIM 5.0/6.0 Class-ID: EC000046
 ETIM 5.0/6.0 Class-Description: Cable tie
- Colour delivered**
 Blue
- Material**
 Polyamide 6.6 or polypropylene with metal parts
 Halogen-free and silicone-free
- Temperature range**
 -40°C up to +85°C
 Installation temperature: -5°C up to +60°C

Article number	Article description	UL certification	Length x width (mm)	Bundling Ø (mm)	Tensile strength (N)	Pieces / PU
Without steel nose / PA 6.6						
61723360	Cable Tie Detect 98x2.5 BU	no	98.0 x 2.5	1.0 - 21.0	80.0	100
61723364	Cable Tie Detect 140x3.5 BU	no	140.0 x 3.5	2.0 - 32.0	180.0	100
61723365	Cable Tie Detect 200x3.5 BU	no	200.0 x 3.5	3.0 - 50.0	180.0	100
61723361	Cable Tie Detect 200x4.5 BU	no	200.0 x 4.5	3.0 - 50.0	220.0	100
61723366	Cable Tie Detect 290x4.5 BU	no	290.0 x 4.5	3.5 - 78.0	220.0	100
61723362	Cable Tie Detect 360x4.5 BU	no	360.0 x 4.5	3.5 - 100.0	220.0	100
61723363	Cable Tie Detect 365x7.5 BU	no	365.0 x 7.5	8.0 - 100.0	540.0	100
With steel nose (brand TY-RAP®) / PA 6.6						
61723351	Cable tie TY-RAP TY523M-NDT	no	92.0 x 2.4	2.0 - 16.0	80	100
61723359	Cable tie TY-RAP TY524M-NDT	no	140.0 x 3.6	2.0 - 29.0	180.0	100
61723352	Cable tie TY-RAP TY525M-NDT	no	186.0 x 4.8	3.5 - 45.0	220	100
61723353	Cable tie TY-RAP TY528M-NDT	no	360.0 x 4.8	3.5 - 102.0	220	100
61723354	Cable tie TY-RAP TY527M-NDT	no	340.0 x 7.0	6.0 - 90.0	540	100
With steel nose (brand TY-RAP®) / polypropylene						
61723355	Cable tie TY-RAP TY523M-PDT	no	92.0 x 2.4	2.0 - 16.0	50	100
61723356	Cable tie TY-RAP TY525M-PDT	no	186.0 x 4.8	3.5 - 45.0	130	100
61723357	Cable tie TY-RAP TY528M-PDT	no	360.0 x 4.8	3.5 - 102.0	130	100
61723358	Cable tie TY-RAP TY527M-PDT	no	340.0 x 7.0	6.0 - 90.0	270	100

TY-RAP® is a registered trademark of ABB.
 Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Accessories

- Detectable cable tie sockets refer to page 1014