




Customer: **ELFA AB**
56-121-63

Transf. No. **AA-58020**
Designed: **1995-03-23 / ts**

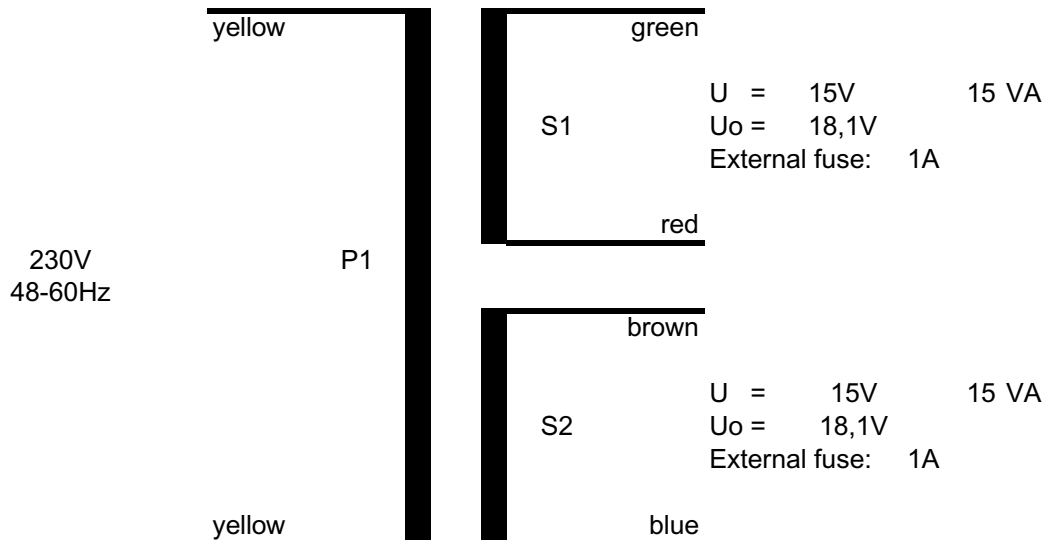

Classification

Protection against electrical shock:	Safety Isolating Transformer
Protection index:	IP00
Protection against short-circuit and abnormal use:	Non-short-circuit proof
Time of operation:	Continuously
Intended use:	Incorporated
Ambient temperature / Material Classification:	Ta40/E

Assembling:	1 pc	Metal Washer	D = 50	mm
	2 pcs	Rubber Pads	D = 50	mm

Dimensions:	OD =	68	mm
	H =	35	mm

Terminations:	Prim:	Multistranded Wire Style 3266.	Awg 22	L = 200mm
	Sec:	Solid Copper insulated with tubes of Natvar.		L = 200mm

Label on the paper box.

	Toroid International AB		
	Transf.No.	AA-58020	
	ELFA P/N:	56-121-63	

Label on transformer.

	Toroid International AB			
	Transf.No.	AA-58020		
	Prim.	230V 48-60Hz ye-ye		
	Sec.	2x 15V	30 VA	
	gn-re/bn-bu		Fuse: 1A	



EC/EEA Declaration of conformity

Type of equipment: **Safety Isolating Transformer**

Brand name: **Toroid**

Part no: **AA-58020**

Customer: **ELFA AB** **56-121-63**

Manufactures: Toroid International (Pvt) Ltd Toroid International AB
 PO Box 15, Phase 2, FTZ Box 3
 Katunayake, Sri-Lanka 351 03 Växjö, Sweden

Toroid India Pvt Ltd
 Technopark Campus
 Trivandrum 695 581
 Kerala, India

Manufacture's representative
within EEA: Toroid International AB
 Box 3
 351 03 Växjö, Sweden

As the manufacturer's authorised representative established within EEA, we declare that the product is in conformity with the provision of the EC directives: Low Voltage Directiven (LVD) 73/23/EEG, 93/68/EEG

The product fulfils the requirements according to the following harmonised standards: EN 61558-1, EN 60 950, EN 60 065 and IEC 601-1.

All transformers have been inspected and tested with approved result according to the following:

1. Ocular inspection
2. No-load input current
3. No-load secondary voltage
4. Dielectric strength between primary an

The product is to be regarded as a modular component to be used in an electric apparatus that in turn has to fulfil the EMC - directives.

The product itself does not need to be EMC approved for CE marking according to directive 89/336/EEG, 92/31/EEG and 93/68/EEG

Date: 2003-05-07

Thomas Svensson / Design engineer