



SILIZED FUSE LINK 400 V  
GR,SEMICOND.PROTECT.GR.D01 10 A

Model		
product brand name		SENTRON
Product designation		Semiconductor fuse
General technical data		
Size of fuse system / acc. to DIN EN 60269-1		D01
Operating class of the fuse link		gR (complete converter protection)
Dissipation		
<b>Active power loss</b>		
<ul style="list-style-type: none"> <li>for rated value of the current / with AC / in hot operating state / per pole</li> </ul>	W	6.9
Main circuit		
Operating voltage / Rated value	V	400
Operating current / Rated value	A	10
Appearance		
Color coding of the fuse link		others
Certificates		
<b>Equipment marking</b>		
<ul style="list-style-type: none"> <li>acc. to DIN EN 61346-2</li> </ul>		F
<ul style="list-style-type: none"> <li>acc. to DIN EN 81346-2</li> </ul>		F



## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

### Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SE1310>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE1310/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=5SE1310](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5SE1310)

### CAX-Online-Generator

<http://www.siemens.com/cax>

### Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

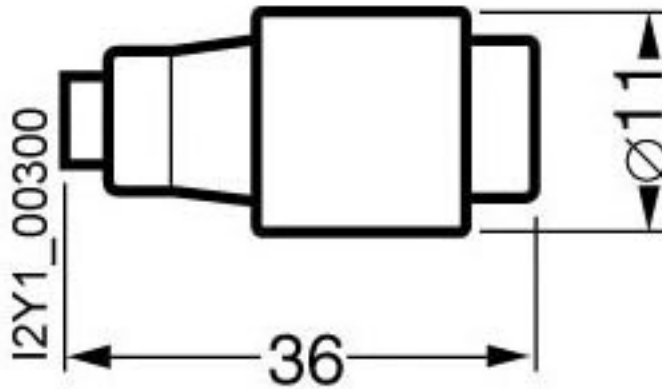

last modified:

11.03.2015