

CUBITRON II

Now you can enjoy the awesome cutting power of 3M precision-shaped grain technology – in a versatile long-lasting flap disc construction! 3M Cubitron II Flap Discs 967A let you breeze through a wide range of tough jobs around the shop, including grinding, weld removal, deburring and more. Grinding and blending in a single step! Plus, they cut with less pressure, for greater operator comfort.

The benchmark of flexible grinding.

3M™ Cubitron™ II Flap Disc 967A

3M Cubitron II Flap Discs are flexible, so they easily follow curves and contours. They are less prone to gouging, and include a grinding aid, to help keep the disc cool on heat-sensitive metals. And, because their unique construction allows more abrasive material to be loaded on, they keep on cutting – long after other discs have called it quits!


Use it on stainless steel, carbon steel, aluminium and non-ferrous metals. Grinding aid helps keep product cool on heat-sensitive metals.



Optimised performance for:

- Flame cut soothing
- Scale removal
- Weld removal

- 3M Cubitron II 967A 40+
- Competitive Ceramic 36 Grit
- Competitive Ceramic 40 Grit

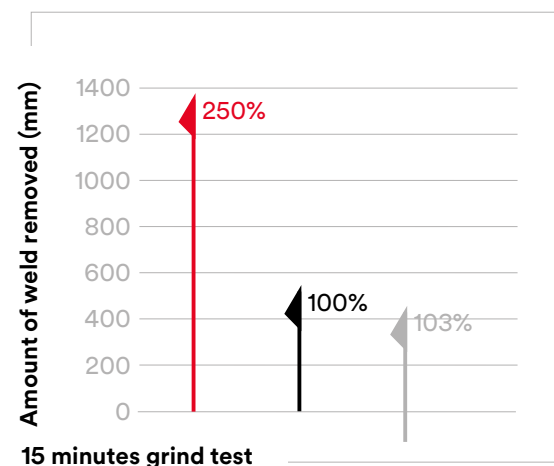

3M Cubitron II Flap Disc 967A
(All discs have Y-weight poly-cotton backing.)

Flat:

Part N°	Size	Grade	Max RPM
65066	115mm	40+	13,300
65067		60+	
65068		80+	
65069	125mm	40+	12,200
65070		60+	
65071		80+	
65072	180mm	40+	8,600
65073		60+	
65074		80+	

Conical:

Part N°	Size	Grade	Max RPM
65051	115mm	40+	13,300
65052		60+	
65053		80+	
65054	125mm	40+	12,200
65055		60+	
65056		80+	
65060	180mm	40+	8,600
65061		60+	
65062		80+	



Don't fear the edge.

3M™ Cubitron™ II Roloc™ Durable Edge Disc 984F

When you're using a disc sander, you're relying on the edge of your abrasive disc to grind, blend and finish. If you've been frustrated by edge failures, make the switch to 3M Cubitron II Roloc 984F. It's durable edge backing – combined with 3M precision-shaped grain – make this one tough disc that lasts longer and performs stronger.

- Features a durable edge backing for extended edge retention.
- Precision-shaped grain and grinding aid allow discs to run cooler.
- Precision-shaped grain self-sharpenes for consistent and continuous cutting power with less pressure.
- Quality 3M Roloc buttons for an easy on/off attachment that stays in place.
- For grinding, blending, finishing and deburring applications on virtually all metal types.



3M Cubitron II Roloc Durable Edge Disc 984F

Part N°	Size	Grade	MOS
27700	38mm	36+	20,000
27701	50mm	36+	
27709		60+	
27717	80+		
27702	75mm	36+	
27710		60+	
27718		80+	

3M Roloc Accessories

Part N°	Size	Grade	Max RPM
45095	50mm x 6 thread	Medium	25,000
A45096		Hard	
45092		Medium	18,000
45091	75mm x M14-2.0	Hard	20,000
84998		Hard	20,000

Optimised performance for:

- Flame cut soothing
- Scale removal
- Weld removal
- Contoured areas