



AS-INTERFACE COMPACT MOD. K45, A/B-SLAVE, DIGITAL, 4I, IP67, 4X1 INPUT, MAX. 200 MA, PNP 4 X M8-SOCKET SCREW MOUNTING MOUNTING PLATE 3RK1901-2EA00 OR 3RK1901-2DA00 TO BE ORDERED SEPARATELY

General technical data:

Design of the product		digital I/O modules for operation in the field, IP67 - K45
Type		4 inputs
Design of the slave type		A/B slave
I/O configuration		0
ID/ID2 code		A/0
Number I/O sockets		4
Type of electrical connection of the inputs and outputs		M8 screw-type terminals
AS interface total current input max	mA	270
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
Ground terminal		not available
Addressing		front addressing socket
AS interface Connection Polarity reversal protection		built-in
Delivery note		the modules are delivered without mounting plate
Note 1		All K45 compact modules are delivered with stainless steel screws/sockets

Sensor supply:

Type of voltage supply for power supply		using AS-Interface
Input voltage	V	20 ... 30
Property of the sensor supply Short-circuit and overload resistant		Yes
Ampacity of the sensor supply for all inputs		
<ul style="list-style-type: none"> at ambient temperature 40 °C 	mA	200

Inputs:		
Number of digital inputs		4
Type of connection		2- and 3-wire technology
Input circuit		PNP transistor
Type of voltage of the input voltages		DC
Inputs switching level High min	V	10
Input current at digital input		
• for signal <1> minimum	mA	6
• with signal <0> maximum	mA	1.5
Inputs sensor supply using AS-Interface		short-circuit and overload resistant
Inputs socket assignment		
• PIN 1		sensor supply L+
• PIN 3		sensor supply L-
• PIN 4		data input
Design of the pin assignment of the inputs		standard assignment

Outputs:		
Number of digital outputs		0
Status display		
• display of I/Os		yellow LED
• display of Uaux		not required
• display of AS-Interface/diagnostics		green/red dual LED
Assignment of data bits		
• socket		PIN 4 = IN1 (D0)
• socket 2		PIN 4 = IN2 (D1)
• socket 3		PIN 4 = IN3 (D2)
• socket 4		PIN 4 = IN4 (D3)

Ambient conditions:		
Ambient temperature		
• during operation	°C	-25 ... +85
• during storage	°C	-40 ... +85
Protection class IP		IP67

Mechanical data:		
Width	mm	45
Height	mm	80
Depth	mm	30
Mounting type		standard rail mounting/wall mounting using mounting plate for K45 compact module

Certificates/ approvals:		
AS-Interface certificate		yes
Approvals		UL, CSA, shipbuilding

General Product Approval



CSA



GOST



UL



ABS



BUREAU
VERITAS

Shipping Approval



DNV



LRS



PRS



RMRS

other

[Confirmation](#)

[Declaration of
Conformity](#)

other

[Environmental
Confirmations](#)

[other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK22000CT200AA3>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/3RK22000CT200AA3/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

<http://www.automation.siemens.com/bilddb/index.aspx?attID9=3RK22000CT200AA3&lang=en>

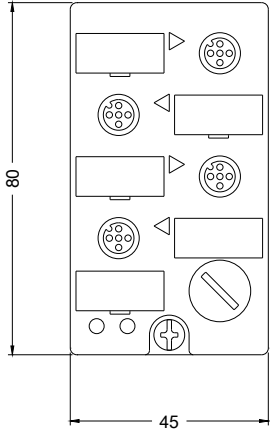

last modified:

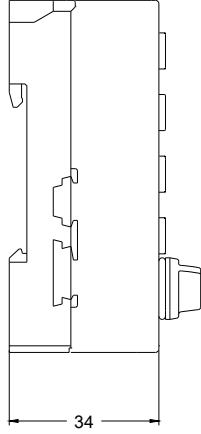

17.01.2015