

PCB DIP Socket

2.54mm Pitch

multicomp PRO


**RoHS
Compliant**

Specifications:


Current Rating	: 1A
Dielectric withstanding Voltage	: 1,000V RMS/minute
Insulator Resistance	: 5,000MΩ min.
Contact Resistance	: 20mΩ initial 30mΩ after test.
Operating Temperatures	: -25°C to +85°C
Insertion Force	: 340g (12 oz) max. per Contact.
Withdrawal Force	: 80g (2.82 oz) min. per contact
Engineering Temperature	: 230°C ±5°C for 5 seconds ±0.5 seconds

Material:

Contact	: Phosphor Bronze thickness 0.15mm
Insulator	: PBT-4830
Contact Plating, Tin plated	60μ" to 80μ" (Lead free plating)

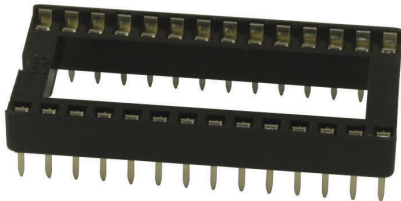

Diagram

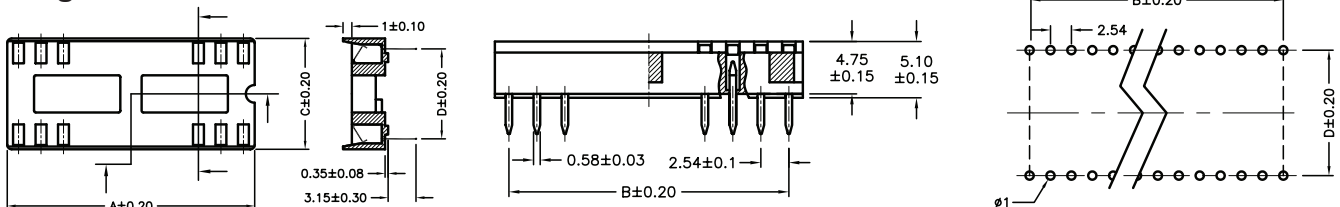

Dimensions : Millimetres

PCB Layout

Part Number Table

Description	Number of Position	Dimensions				Part Number
		A (mm)	B (mm)	C (mm)	D (mm)	
PCB DIP Socket, 2.54mm Pitch	6	7.62	5.08	10.16	7.62	SPC15556
	8	10.16	7.62			SPC15494
	14	17.78	15.24			SPC15496
	16	20.32	17.78			SPC15498
	18	22.86	20.32			SPC15500
	20	25.4	22.86			SPC15501
	24	30.48	27.94	17.78	15.24	SPC15503
	28	35.56	33.02			SPC15504
	32	40.64	38.1			SPC15557
	40	50.8	48.26			SPC15505
	48	60.96	58.42			SPC15558

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO