

AS-INTERFACE 4-FOLD M12 FEEDER AS-I AND U-AUX, 4 X M12 SOCKET IP67, SUPPLIED WITH MOUNTING PLATE



General technical data:

Type of device		AS-Interface accessories
Design of the product		AS-i M12 4-fold feeder, AS-i with Uaux, 4x M12 socket
Function		AS-i flat cable transition to M12
operating voltage according to AS-Interface specification	V	26.5 ... 31.6
Number sockets		4

Connections/ Terminals:

connection		insulation piercing method for AS-Interface flat cable
Connection system		insulation piercing method for AS-Interface flat cable
AS interface		
• Connection		4 × M12 socket

Inputs:

Inputs socket assignment		1 = AS-i "+" 2 = Uaux "-" 3=AS-i "-" 4 = Uaux "+"
--------------------------	--	---

Mechanical data:

Type of mounting		for wall and standard rail mounting
Contacts Load rating max	A	4

Ambient conditions:

ambient temperature	°C	-25 ... +85
ambient temperature when stored	°C	-25 ... +85
degree of protection		IP67

Certificates/ approvals:

## General Product Approval



## Shipping Approval

### other



[Environmental  
Confirmations](#)

[Declaration of  
Conformity](#)

[Confirmation](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK19011NR04>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK19011NR04/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

<http://www.automation.siemens.com/bilddb/index.aspx?attID9=3RK19011NR04&lang=en>

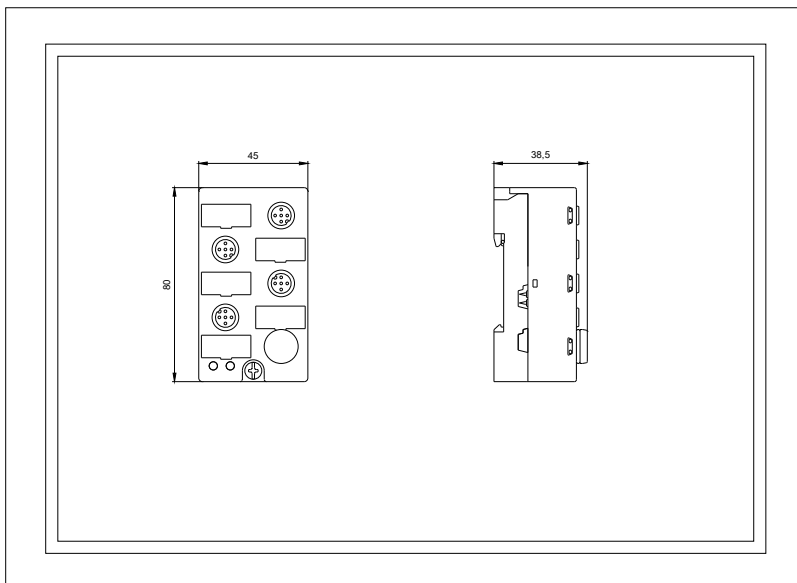

last modified:

15.01.2015