

TECHNICAL DATA

Fluke 393 FC CAT III 1500 V True-rms Clamp Meter with iFlex



The world's only CAT III 1500 V current clamp

The 393 FC CAT III 1500 V True-rms Clamp Meter with iFlex is designed for technicians who work in dc environments up to 1500 V: solar arrays, wind power, electric railways, data centers battery banks for uninterruptible power supplies. The clamp will measure up to 1500 V dc, 1000 V ac, and up to 999.9 A dc or ac through the clamp jaw. The included iFlex flexible current probe extended ac current measurements up to 2500 amps.

This clamp has a thin jaw, giving you access to cables in crowded combiner boxes. Test leads are designed with your work in mind, and are also rated to CAT III 1500 V.

Other key functions:

- IP54 rated, ideal for work outdoors on solar arrays and wind power systems
- DC power measurement, showing readings in kVA
- Audio Polarity indicator helps prevent accidental miswires
- Visual Continuity turns provide a bright green light in the display, ideal when working in dark and noisy environments
- Logging and reporting of test results via Fluke Connect software

When measuring ac current the included iFlex flexible current probe gives you unparalleled access to cable in tight spaces. The iFlex probe can be twisted through extremely small spaces and provide accurate current measurements.



MEASURE SAFELY

CAT III 1500 V rated clamp meter

VERSATILE CLAMP JAW

Thin jaw for access to cables in crowded combiner boxes, able to clamp around multiple cables

IP54 RATED


Work outdoors in dusty or damp conditions

MORE FUNCTIONS, AUTOMATIC SAFEGUARDS

Work efficiently with dc power measurement, audio polarity and visual continuity



Specifications

General specifications																	
Maximum voltage between any terminal and earth ground	1000 V AC 1500 V DC																
Batteries	2 AA IEC LR6 alkaline																
Display	Dual display with backlight																
Automatic power off	20 minutes																
Electrical specifications																	
Accuracy	Accuracy is specified for 1 year after calibration, at operating temperatures of 18 °C to 28 °C, relative humidity at 0 % to 75 %. Accuracy specifications take the form of: ±([% of Reading] + [Number of Least Significant Digits]).																
Temperature coefficients	Add 0.1 x specified accuracy for each °C > 28 °C or < 18 °C																
AC current: jaw																	
Range	999.9 A																
Resolution	0.1 A																
Accuracy	2 % + 5 digits (10 Hz to 100 Hz) 2.5 % + 5 digits (100 Hz to 500 Hz)																
Crest Factor (50/60 Hz)	2.5 @ 600.0 A 3.0 @ 500.0 A 1.42 @ 999.9 A Add 2 % for C.F. >2																
AC current: flexible current probe																	
Range	999.9 A 2500 A																
Resolution	0.1 A (≤999.9 A) 1 A (≤2500 A)																
Accuracy	3 % RD + 5 digits (10 Hz to 500 Hz)																
Crest Factor (50/60Hz)	2.5 @ 1400 A 3.0 @ 1100 A 1.42 @ 2500 A Add 2 % for C.F. >2																
Position sensitivity	<table border="1"> <thead> <tr> <th>Distance from Optimum</th> <th>i2500-10 Flex</th> <th>i2500-18 Flex</th> <th>Error</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.5 in (12.7 mm)</td> <td>1.4 in (35.6 mm)</td> <td>± 0.5 %</td> </tr> <tr> <td>B</td> <td>0.8 in (20.3 mm)</td> <td>2.0 in (50.8 mm)</td> <td>± 1.0 %</td> </tr> <tr> <td>C</td> <td>1.4 in (35.6 mm)</td> <td>2.5 in (63.5 mm)</td> <td>± 2.0 %</td> </tr> </tbody> </table> <p>Measurement uncertainty assumes centralized primary conductor at optimum position, no external electrical or magnetic field, and within operating temperature range.</p>	Distance from Optimum	i2500-10 Flex	i2500-18 Flex	Error	A	0.5 in (12.7 mm)	1.4 in (35.6 mm)	± 0.5 %	B	0.8 in (20.3 mm)	2.0 in (50.8 mm)	± 1.0 %	C	1.4 in (35.6 mm)	2.5 in (63.5 mm)	± 2.0 %
Distance from Optimum	i2500-10 Flex	i2500-18 Flex	Error														
A	0.5 in (12.7 mm)	1.4 in (35.6 mm)	± 0.5 %														
B	0.8 in (20.3 mm)	2.0 in (50.8 mm)	± 1.0 %														
C	1.4 in (35.6 mm)	2.5 in (63.5 mm)	± 2.0 %														
																	
DC current																	
Range	999.9 A																
Resolution	0.1 A																
Accuracy	2 % RD + 5 digits ^[1] ^[1] When using the ZERO function to compensate for offsets.																
AC voltage																	
Range	600.0 V 1000 V																
Resolution	0.1 V (≤600.0 V) 1 V (≤1000 V)																
Accuracy	1 % RD + 5 digits (20 Hz to 500 Hz)																

Specifications (continued)

DC voltage	
Range	600.0 V 1500 V
Resolution	0.1 V (≤ 600.0 V) 1 V (≤ 1500 V)
Accuracy	1 % RD + 5 digits
mV dc	
Range	500.0 mV
Resolution	0.1 mV
Accuracy	1 % RD + 5 digits
Amps frequency: jaw	
Range	5.0 Hz to 500.0 Hz
Resolution	0.1 Hz
Accuracy	0.5 % RD + 5 digits
Trigger level	5 Hz to 10 Hz, ≥ 10 A 10 Hz to 100 Hz, ≥ 5 A 100 Hz to 500 Hz, ≥ 10 A
Amps frequency: flexible current probe	
Range	5.0 Hz to 500.0 Hz
Resolution	0.1 Hz
Accuracy	0.5 % RD + 5 digits
Trigger level	5 Hz to 20 Hz, ≥ 25 A 20 Hz to 100 Hz, ≥ 20 A 100 Hz to 500 Hz, ≥ 25 A
Voltage frequency	
Range	5.0 Hz to 500.0 Hz
Resolution	0.1 Hz
Accuracy	0.5 % RD + 5 digits
Trigger level	5 Hz to 20 Hz, ≥ 5 V 20 Hz to 100 Hz, ≥ 5 V 100 Hz to 500 Hz, ≥ 10 V
DC power	
Range	600.0 kVA (600.0 V dc range) 1500 kVA (1500 V dc range)
Resolution	0.1 kVA 1 kVA
Accuracy	2 % RD + 2.0 kVA 2 % RD + 20 kVA
Resistance	
Range	600.0 Ω 6000 Ω 60.00 k Ω
Resolution	0.1 Ω (≤ 600.0 Ω) 1 Ω (≤ 6000 Ω) 0.01 k Ω (≤ 60.00 k Ω)
Accuracy	1 % RD + 5 digits
Capacitance	
Range	100.0 μ F 1000 μ F
Resolution	0.1 μ F (≤ 100.0 μ F) 1 μ F (≤ 1000 μ F)
Accuracy	1 % RD + 5 digits
Inrush trigger level	5 A

Specifications (continued)

Mechanical specifications	
Size (L x W x H)	281 mm x 84 mm x 49 mm
Weight (with batteries)	520 g
Jaw opening	34 mm
Flexible current probe diameter	7.5 mm
Flexible current probe cable length (head to electronics connector)	1.8 m
Environmental specifications	
Operating temperature	-10 °C to 50 °C
Storage temperature	-40 °C to 60 °C
Operating humidity	Non-condensing (<10°C) ≤90 % RH (at 10 °C to 30 °C) ≤75 % RH (at 30 °C to 40 °C) ≤45 % RH (at 40 °C to 50 °C)
Operating altitude	2000 m
Storage altitude	12,000 m
Ingress Protection (IP) Rating	
Electromagnetic Compatibility (EMC)	
International	IEC 61326-1: Portable, Electromagnetic Environment, IEC 61326-2-2 CISPR 11: Group 1, Class A Group 1: Equipment has intentionally generated and/or uses conductively-coupled radio frequency energy that is necessary for the internal function of the equipment itself. <i>Class A: Equipment is suitable for use in all establishments other than domestic and those directly connected to a low-voltage power supply network that supplies buildings used for domestic purposes. There may be potential difficulties in ensuring electromagnetic compatibility in other environments due to conducted and radiated disturbances.</i> <i>Caution: This equipment is not intended for use in residential environments and may not provide adequate protection to radio reception in such environments.</i>
Korea (KCC)	Class A equipment (Industrial Broadcast and Communications Equipment) <i>Class A: Equipment meets requirements for industrial electromagnetic wave equipment and the seller or user should take notice of it. This equipment is intended for use in business environments and not to be used in homes.</i>
USA (FCC)	47 CFR 15 subpart B. This product is considered an exempt device per clause 15.103.
Safety	
General	IEC 61010-1, Pollution Degree 2
Measurement	IEC 61010-2-032: CAT III 1500 V / CAT IV 600 V IEC 61010-2-033: CAT III 1500 V / CAT IV 600 V
Wireless radio	
Radio frequency certification	FCC ID: T68-FBLE, IC: 6627A-FBLE
Wireless radio frequency range	2400 MHz to 2483.5 MHz
Output power	<100 mW
SIMPLIFIED EU DECLARATION OF CONFORMITY Hereby, Fluke declares that the radio equipment contained in this Product is in compliance with Directive 2014/53/EU. The full text of the EU declaration is available at the following Internet address: fluke.com/en-us/declaration-of-conformity	

Ordering information

Fluke 393 FC CAT III 1500 V True-rms Clamp Meter with iFlex

Included

- Fluke 393 FC CAT III 1500 V True-rms Clamp Meter with iFlex
- Test leads, CAT III 1500 V rated, right angle plugs, with safety caps
- iFlex 18 inch flexible current probe
- TPAK magnetic hanging strap
- Premium carrying case
- 3-year warranty

Visit www.fluke.com to get complete details on these products or ask your local Fluke sales representative.



Save all measurements, including dc power, to a smartphone and the cloud using Fluke Connect software.

Preventive maintenance simplified. Rework eliminated.

Save time and improve the reliability of your maintenance data by wirelessly syncing measurements using the Fluke Connect system.

- Eliminate data-entry errors by saving measurements directly from the tool and associating them with the work order, report or asset record.
- Maximize uptime and make confident maintenance decisions with data you can trust and trace.
- Move away from clipboards, notebooks and multiple spreadsheets with a wireless one-step measurement transfer.
- Access baseline, historical and current measurements by asset.
- Share your measurement data using ShareLive™ video calls and emails.
- The Fluke 1587 FC Insulation Multimeter is part of a growing system of connected test tools and equipment maintenance software. Visit the Fluke website to learn more about the Fluke Connect system.

Find out more at fluke.com



All trademarks are the property of their respective owners. WiFi or cellular service required to share data. Smartphone, wireless service and data plan not included with purchase. First 5GB of storage is free.

Smartphone wireless service and data plan not included with purchase. Fluke Connect is not available in all countries.

Fluke. Keeping your world up and running.®

Fluke Corporation

PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.

PO Box 1186, 5602 BD Eindhoven, The Netherlands

For more information call:

In the U.S.A. (800) 443-5853 or Fax (425) 446-5116
 In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222
 In Canada (800)-36-FLUKE or Fax (905) 890-6866
 From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116
 Web access: <http://www.fluke.com>

©2021 Fluke Corporation. Specifications subject to change without notice. Printed in U.S.A. 6/2021 210543-en

Modification of this document is not permitted without written permission from Fluke Corporation.

TECHNICAL DATA

Fluke IRR1-SOL Solar Irradiance Meter



HIGH PRECISION MONO-CRYSTALLINE SOLAR SENSOR

Instantaneous irradiance measurements up to 1400 W/m²

TWO OPTIONS FOR TEMPERATURE MEASUREMENT

Use the built-in temperature sensor or the external suction mount temperature probe to measure ambient and panel temperature

INTEGRATED COMPASS

Measure and document roof or site orientation

INCLINATION SENSOR

Know roof and PV panel tilt when surveying, installing, or adjusting the installation

Make the critical measurements needed for installing, testing, maintaining, and reporting on solar panels or photovoltaic systems with one, easy-to-use tool.

The Fluke IRR1-SOL Irradiance Meter has been designed from the ground up to simplify the installation, commissioning, and troubleshooting of photovoltaic arrays, measuring irradiance, temperature, inclination and direction of the solar array in a single handheld tool. With a rugged, compact design, a protective carrying case, and an easy-to-read, high-contrast LCD screen to read measurements in direct sunlight, the IRR1-SOL can go where you go. The simple user interface, instantaneous solar irradiation measurements and built-in temperature sensor make it easy to meet the IEC 62446-1 requirements for testing, documenting, and maintaining photovoltaic systems. Additionally, the integrated compass and inclination sensor allow you to quickly measure and document roof and site orientation, pitch, and panel tilt while surveying, installing, or adjusting an installation.

Whether working on a roof-mounted system or on a large field installation, the IRR1-SOL is the single-handed solution that every solar installer and technician needs in their tool bag.

Use the IRR1-SOL for:

Photovoltaic system design and surveying

To find the expected production at a site, determine your solar resource while taking shading into account. The solar resource is measured in peak sun hours: the number of hours per day with 1,000 watts generated per square meter of solar array. Location, time of day, season, and weather conditions all influence peak sun hours. Use the Fluke IRR1-SOL to determine the actual solar irradiance (Watts/m²) and shading at the site to develop a baseline.

Measuring

Once your system is installed, make sure it is operating as designed by measuring its electrical characteristics and the actual power output of the array. The performance of a photovoltaic array is based on its current-voltage (IV) curve. Use the IRR1-SOL to obtain the amount of solar irradiance necessary to calculate the IV curve of the power output.

Comparing and diagnosing

Even when installed correctly, a photovoltaic system may not be producing the expected electrical output. In order to produce the expected output the system needs to receive the correct amount of irradiance energy to generate the DC voltage that is fed into the inverter.

Specifications

Irradiance	
Measuring Range	0 to 1400 W/m ²
Resolution	1 W/m ²
Measuring Accuracy	± (5 % + 5 Digit)
Temperature Measurement	
Measuring range (°C)	-22 °F to 212 °F (-30 °C to 100 °C)
Resolution	0.2 °F (0.1 °C) / 1 °F @ > 100 °F
Measuring Accuracy	±2 °F (±1 °C) @ 14 °F to 167 °F (-10 °C to 75 °C), ±4 °F (±2 °C) @ -22 °F to 14 °F (-30 °C to -10 °C) and 167 °F to 212 °F (75 °C to 100 °C)

Note: Temperature measurement response time: ~30 sec.

Inclination Angle	
Measuring Range	-90° to +90°
Resolution	0.1°
Measuring Accuracy	± 1.5° @ -50° to +50°, ±2.5° @ -85° to -50° and +50° to +85° ±3.5° @ -90° to -85° and +85° to +90°

Compass	
Measuring Range	0° to 360°
Resolution	1°
Measuring Accuracy	± 7°

Note: a) Measurements valid for device inclination between -20° and +20° to horizontal. Outside that range on LCD will be shown "----".
b) Result is referred to magnetic north.

Temperature	
Operating Temperature IRR1-SOL	-20 °C to 50 °C (humidity <80 %), noncondensing
Operating Temperature 80PR-IRR	-30 °C to 100 °C
Storage Temperature	-30 °C to 60 °C (humidity <80 %)
Altitude	0 m to max. 2000 m

Electromagnetic Compatibility (EMC)	
International	IEC 61326-1: Portable Electromagnetic Environment CISPR 11: Group 1, Class A Group 1: Equipment has intentionally generated and/or uses conductively-coupled radio frequency energy that is necessary for radio frequency energy that is necessary for the internal function of the equipment itself. Class A: Equipment is suitable for use in all establishments other than domestic and those directly connected to a low voltage power supply network that supplies buildings used for domestic purposes. There may be potential difficulties in ensuring electromagnetic compatibility in other environments due to conducted and radiated disturbances. Caution: This equipment is not intended for use in residential environments and may not provide adequate protection to radio reception in such environments.

Specifications continued

Korea (KCC)	Class A Equipment (Industrial Broadcasting & Communication Equipment) Class A: Equipment meets requirements for industrial electromagnetic wave equipment and the seller or user should take notice of it. This equipment is intended for use in business environments and not to be used in homes.
USA (FCC)	47 CFR 15 subpart B. This product is considered an exempt device per clause 15.103.
Protection	
IP Protection	IP40
Power Supply & Battery Life	
Batteries	4 AA Alkaline Batteries
Battery Life (typical)	50 hours (> 9000 readings)
Auto Power Off	30 minutes
Dimensions	
L x W x H	5.90 x 3.14 x 1.37 in (150 x 80 x 35 mm)
Weight	0.5 lb (231 g)

Ordering information

Fluke IRR1-SOL Solar Irradiance Meter

Includes: FLK-IRR1-SOL Solar Irradiance Meter, FLK-80PR-IRR External Temperature Probe with Suction Cup, C250 Carrying Case with Shoulder Strap, (4) AA Alkaline Batteries, User Manual.



Fluke. *Keeping your world up and running.*®

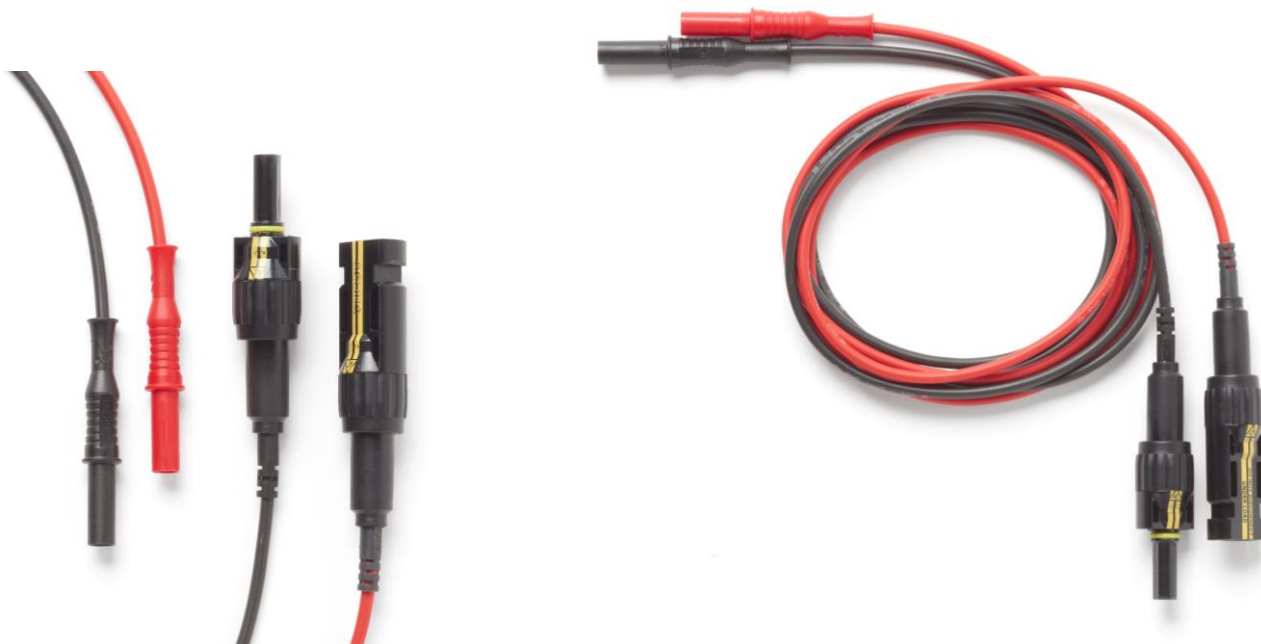
Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

Fluke Europe B.V.
PO Box 1186, 5602 BD
Eindhoven, The Netherlands

For more information call:
In the U.S.A. (800) 443-5853 or
Fax (425) 446-5116
In Europe/M-East/Africa +31 (0) 40 2675 200 or
Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or
Fax (905) 890-6866
From other countries +1 (425) 446-5500 or
Fax +1 (425) 446-5116
Web access: <http://www.fluke.com>

©2020, 2022 Fluke Corporation.
Specifications subject to change without notice.
4/2022 220224-200400-en

Modification of this document is not permitted without written permission from Fluke Corporation.

Model PVLEAD1
Solar MC4 to 4mm Test Lead Set

Features

- Set of black and red MC4 to 4mm adapter test leads for solar applications
- The black lead is a MC4 (female) to 4mm sheathed banana plug on a 60-inch test lead
- The red lead is a MC4 (male) to 4mm sheathed banana plug on a 60-inch test lead
- Allows for connections to test tools that accept 4mm sheathed banana plugs
- Ensures safe current and voltage measurements on Photovoltaic (PV) modules and systems
- Connect measuring devices to PV power plants, for use in regular tests, measurements, and troubleshooting on solar PV panels
- Nickel plated contacts

Ratings

Voltage: Complies to IEC / EN 61010-031
CAT III 1000V / CAT IV 600V
Do Not Disconnect Under Load

Current: 20A

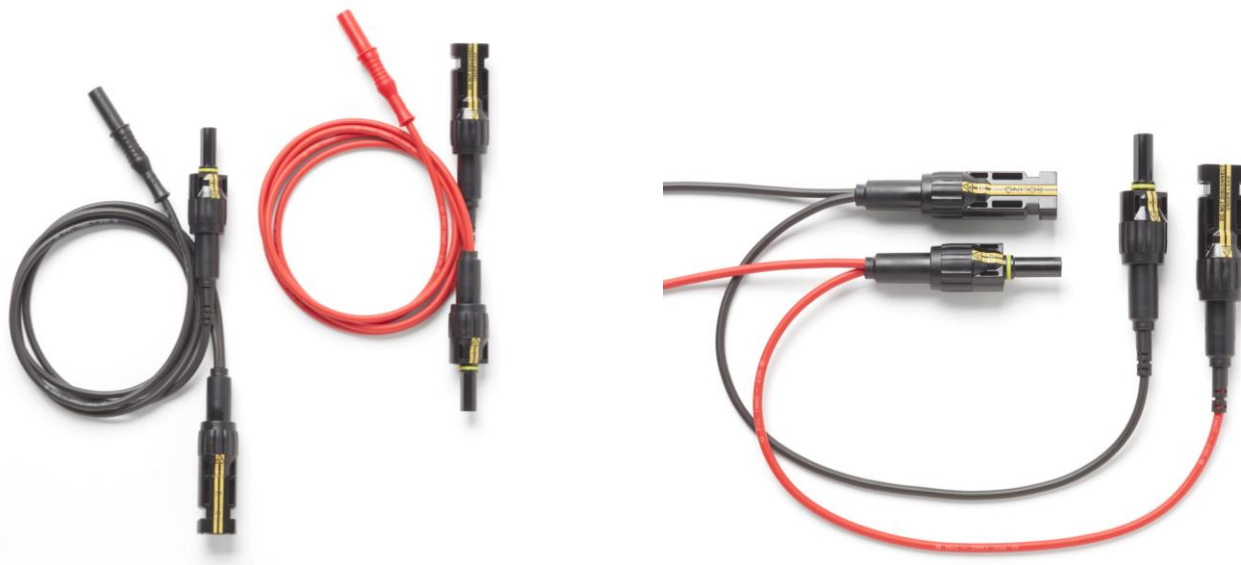
Temperature Range: +5°C to +40°C (+41°F to +104°F)

Ordering Information

Model: PVLEAD1
MC4 TO 4MM TEST LEAD SET, BLACK/RED

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm),
.xxx = ±.005" (.127 mm). All specifications are to the latest revisions.
Specifications are subject to change without notice. Registered trademarks are
the property of their respective companies.

Model PVLEAD3
MC4 Solar Clamp Test Lead Set**Features**

- Set of black and red MC4 Solar Power Clamp Test Leads
- The black test lead is a MC4 (male) breakout to 12-inch MC4 (female) and 36-inch 4mm sheathed banana plug test lead
- The red test lead is a MC4 (female) breakout to 12-inch MC4 (male) and 36-inch 4mm sheathed banana plug test lead
- Designed for use with Solar Clamp Meters that accept 4mm sheathed banana plugs
- Creates connection between the Solar Panel and Inverter for measuring with a Clamp Meter
- Ensures safe DC power measurements on Photovoltaic (PV) modules and systems
- Allows user to monitor solar PV circuits during operation for troubleshooting and maintenance of PV systems
- Nickel plated contacts

Ratings

Voltage: Complies to IEC / EN 61010-031
CAT III 1000V / CAT IV 600V
Do Not Disconnect Under Load

Current: 20A

Temperature Range: +5°C to +40°C (+41°F to +104°F)

Ordering Information

Model: PVLEAD3
MC4 SOLAR POWER CLAMP SET

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.