


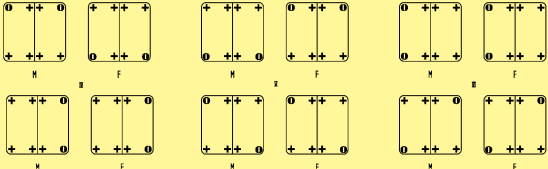




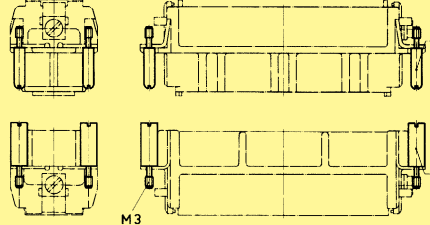
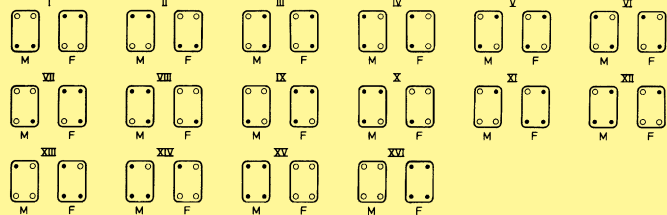
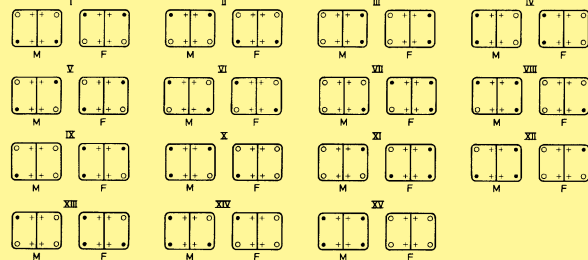





Identification	Part number	Drawing	Dimensions in mm
<p><b>Coding system with code pins</b></p> <p>standard  </p> <p>Han-Modular®  </p>	<p><b>09 30 000 9901<sup>1)</sup></b></p> <p><b>09 14 000 9901<sup>1)</sup></b></p>	<p>for hoods/housings with one insert/one frame</p>  <p>for hoods/housings with the inserts/two frames</p>  <p>● Code pin                  + Normal mounting screw</p> <p>M - Male insert                  F - Female insert</p>	
<p><b>Coding system with guide pins/bushes</b></p> <p>standard</p> <p>Guide pin<sup>2)</sup>  </p> <p>Guide bushing<sup>2)</sup>  </p> <p>Han-Modular®</p> <p>Guide pin  </p> <p>Guide bushing  </p>	<p><b>09 33 000 9908<sup>1)</sup></b></p> <p><b>09 33 000 9909<sup>1)</sup></b></p> <p><b>09 14 000 9908<sup>1)</sup></b></p> <p><b>09 14 000 9909<sup>1)</sup></b></p>	<p>This system is used to guard against angled coupling and decoupling of the connector. The maximum permitted angle according to DIN EN 175 301-801 is <math>\pm 5^\circ</math> (longitudinally).</p>  <p>for hoods/housings with one insert/one frame</p>  <p>for hoods/housings with the inserts/two frames</p>  <p>● Guide pin                  ○ Bush                  + Normal mounting screw</p> <p>M - Male insert                  F - Female insert</p>	
<p><b>Coding pins</b></p> <p>for Han E®, Han® EE, Han® Q 5/0, Han® Q 8/0  </p> <p>for Han D®, Han DD® with loss of contact  </p>	<p><b>09 33 000 9954</b></p> <p><b>09 33 000 9915</b></p>	<p>Use of the coding pin prevents incorrect mating to other connectors of the same type. The male pin should be omitted from the opposing cavity in the male insert.</p> 	

Accessories

95  
08

<sup>1)</sup> Order 4 pieces for one connector  
<sup>2)</sup> for application "insert in hood/housing"

Stock items in bold type