



Accessory 3WA/3WL Closing coil (CC) / Shunt trip (ST), 100% OP 24-30 V DC for continuous duty

Model	
product brand name	SENTRON
product designation	Closing coil/shunt trip
design of the product	closing coil (CC) / shunt release (ST) 100% OP, 24 to 30 V DC, suitable for continuous duty
closing active power [W]	40 W
operating active power [W]	8 W
minimum command time at Us = 100%	60 ms
make time electrical	100 ms
opening time of circuit breaker at Us = 100%	80 ms
design of the DIAZED fuse link gG/miniature circuit breaker with tripping characteristic class C 100% for short-circuit protection minimum permissible	2 A
ambient temperature during operation	
• minimum	-40 °C
• maximum	70 °C
ambient temperature during storage	
• minimum	-40 °C
• maximum	80 °C
General Product Approval	EMC
Declaration of Conformity	Test Certificates

[Confirmation](#)



[Special Test Certificate](#)

Test Certificates

Marine / Shipping

other

Dangerous Good

[Type Test Certificates/Test Report](#)

[Miscellaneous](#)



[Confirmation](#)

[Transport Information](#)

Further information

Siemens has decided to exit the Russian market (see here).
<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WA9111-0AD02>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WA9111-0AD02>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WA9111-0AD02

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

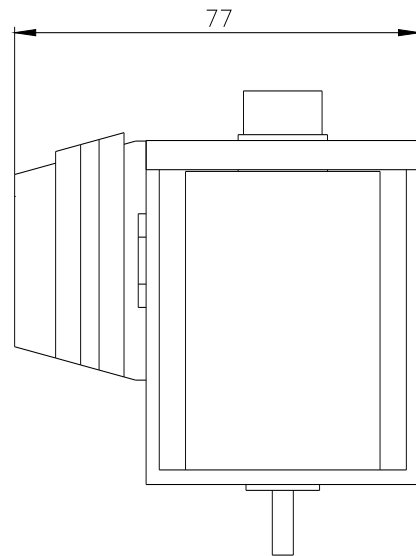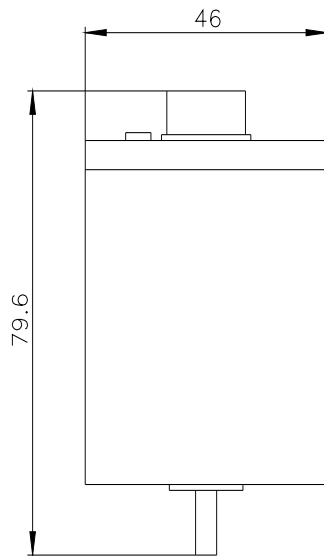

last modified:

4/20/2023 

