

.100" × .300" DIP

14, 16 & 18 Position



- Fits standard IC sockets
- Strong legs, less susceptible to bending or breaking
- Gold or tin lead plating options
- Round or rectangular contact leg options
- Low profile

Date Modified: November 15, 1999

TS-0617-06
Sheet 1 of 2

131

Physical

Insulation

Material: Glass Filled Polyester (PBT)

Flammability: UL94V-0

Color: Gray

Contact

Material: Copper Alloy

Plating

Underplate: 100 μ " [2.54 μ m] Nickel — QQ-N-290, Class 2

U-Slot & Solder Tails: 30 μ " [0.76 μ m] Gold — MIL-G-45204, Type II, Grade C or
200 μ " [0.76 μ m] 90/10 Tin Lead — MIL-P-81728

Wire Accomodation: 26 & 28 AWG Solid or Stranded

Marking: 3M Logo, Part Identification and Contact Position Numbers

Electrical

Current Rating: 1 A

Insulation Resistance: $> 1 \times 10^9 \Omega$ at 500 VDC

Withstanding Voltage: 1000 Vrms at Sea Level

Environmental

Temperature Rating: -55°C to $+105^{\circ}\text{C}$

UL File No.: E68080


3M Interconnect Solutions Division

6801 River Place Blvd.
Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373

.100" × .300" DIP

14, 16 & 18 Position

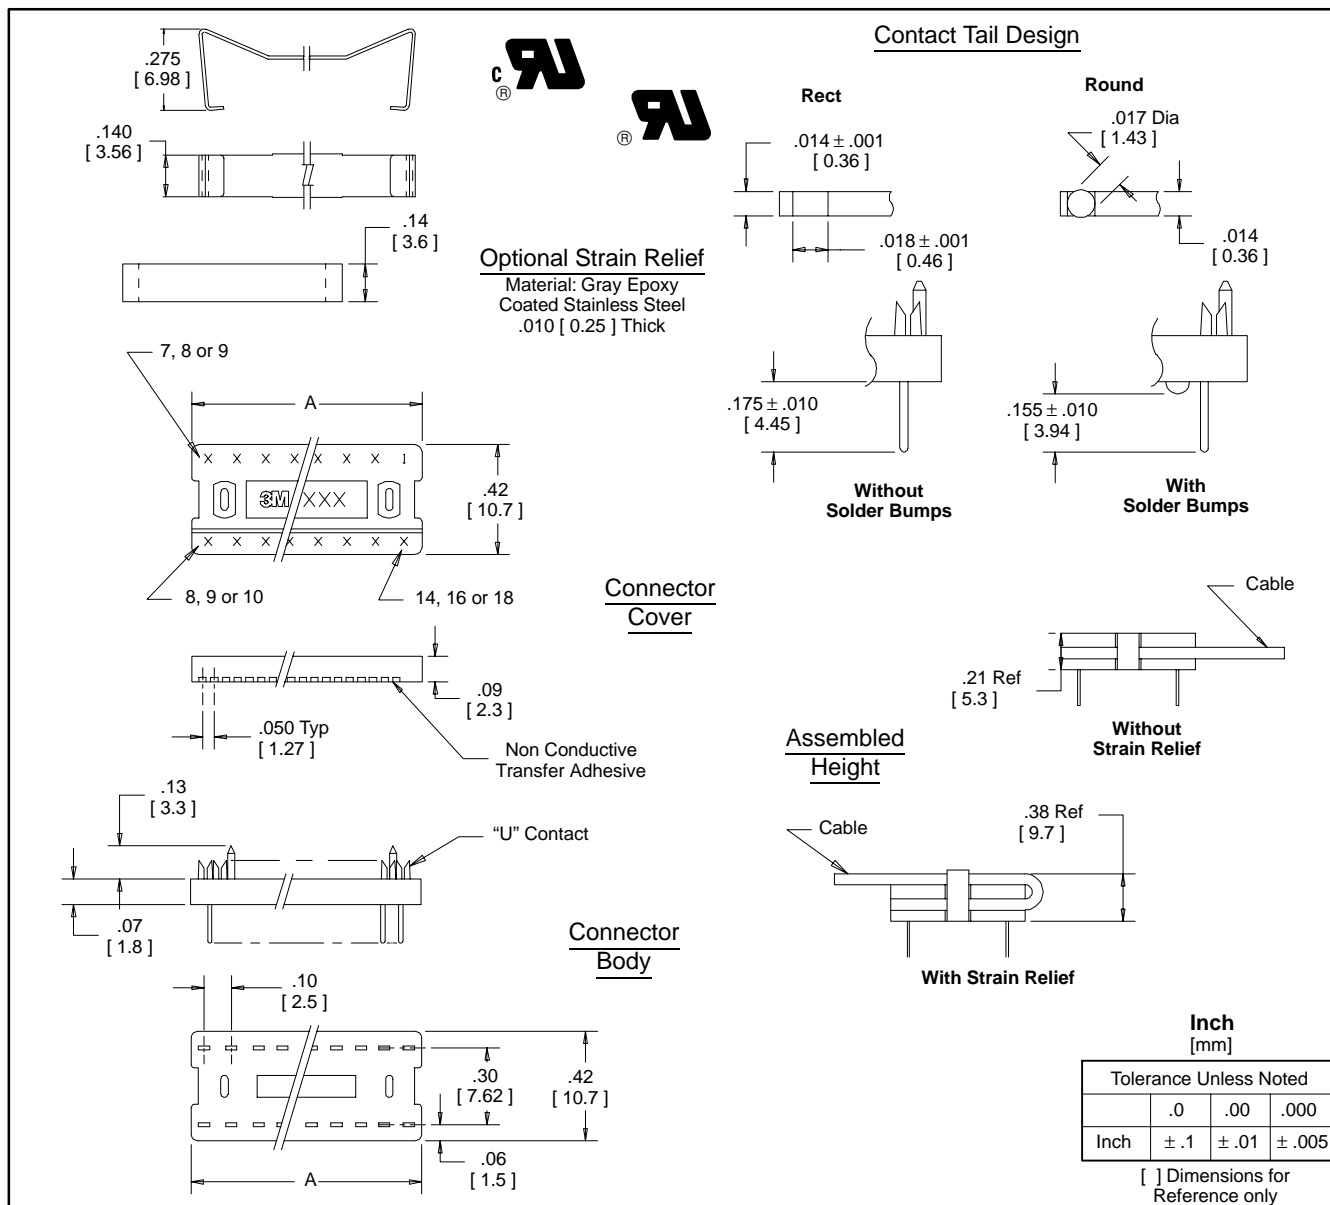

Ordering Information

Connector

Contact Quantity	3M Part Number	Contact Tail	Contact Plating	Solder Bump	Dimension A
14	3406-0000	Rect	Gold	No	.75 [19.1]
	3406-0000T	Rect	Tin Lead	No	
	3406-0010T	Rect	Tin Lead	Yes	
	3406-0002	Round	Gold	No	
16	3416-0000	Rect	Gold	No	.85 [21.6]
	3416-0000T	Rect	Tin Lead	No	
	3416-0010T	Rect	Tin Lead	Yes	
	3416-0002	Round	Gold	No	
18	3563-3000	Rect	Gold	No	.95 [24.1]
	3563-3010T	Rect	Tin Lead	Yes	
	3563-3002	Round	Gold	No	
	3563-3012T	Round	Tin Lead	Yes	

Strain Relief (Optional)

3M Part Number	Used On	Dimension B
3448-3406	3406	.72 [18.3]
3448-3416	3416	.82 [20.8]
3448-3563	3563	.92 [23.4]

TS-0617-06
 Sheet 2 of 2

3M Interconnect Solutions Division

6801 River Place Blvd.
 Austin, TX 78726-9000

For technical, sales or ordering information call
800-225-5373