

Floor protection tray


With galvanised grating, overall height 123 mm

Application:

Traversable floor protection trays for the storage and filling of flammable liquids in GHS categories 1-3 and liquids presenting a water contamination risk in GHS categories 1-4.

Execution:

- Surface carrying capacity 5000 kg/m²
- Permissible load over an area of 100 x 100 mm (forklift truck wheel load capacity) = 500 kg
- traversable by forklift trucks
- Declaration of compliance (ÜHP) pursuant to StawaR
- Galvanised surface
- Overall height 123 mm
- With galvanised grating

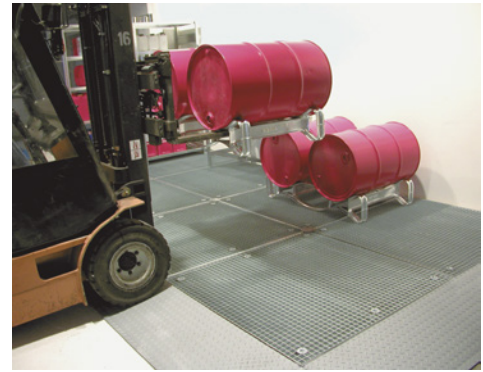

| | |
|--|------------------|
| Art. no. | 50060 815 |
| Collection volume | 178 l |
| Length | 2000 mm |
| Width | 1000 mm |
| Height | 123 mm |
| For liquids hazardous to water GHS 1-4 | Yes |
| For flammable liquids GHS 1-3 | Yes |
| Declaration of conformity in acc. with StawaR | Yes |
| Permissible load capacity (100 x 100 mm) | 500 kg |
| With grating | Yes |
| Coating weight per m² | 5000 kg |
| Material | Sheet steel |
| Surface | Zinc plated |
| Gross Weight | 155.000 kg |
| Product Group | 5AI |

EAN

4052462016804