

GN 615.7 Threaded ball spring plungers

with switch, steel



THREADED BODY

Hardened nickel-plated steel.

BALL

Hardened steel.

HEXAGON NUTS

Nickel-plated steel.

TOOTHED WASHER

Hardened nickel-plated steel.

SPRING

Stainless steel.

WORKING TEMPERATURE

From -10°C to +80°C.

STANDARD EXECUTIONS

- **GN 615.7-O**: black colour sheath for normally closed contact.
- **GN 615.7-S**: grey colour sheath for normally open contact.

FEATURES AND APPLICATIONS

GN 615.7 threaded ball spring plungers are suitable for locking or releasing a device by using a built-in electrical switch.

ELECTRICAL CHARACTERISTICS OF THE SWITCH

Power supply: 20 mA DC

Voltage range: 12 ÷ 24 V DC



Protection class: IP 40 according to table EN 60529 (see page A-19).

Supply cable: Ø 3 mm, two-phase, length 2 metres


Average switch life-span: 10 millions switchings

TECHNICAL DATA

Maximum tensile strength 20 N.

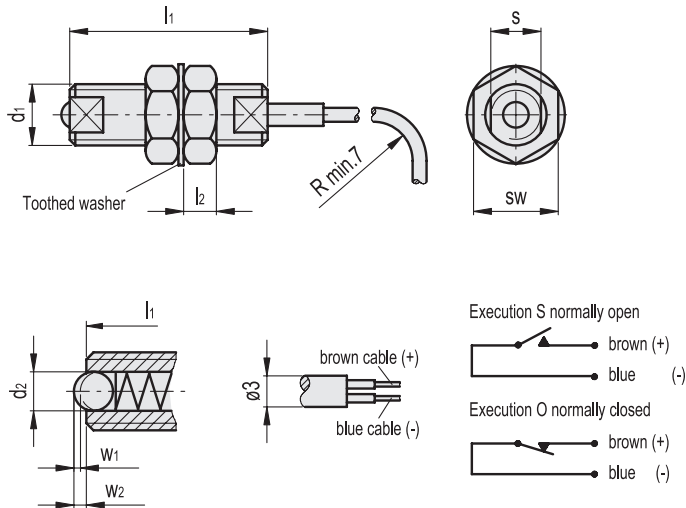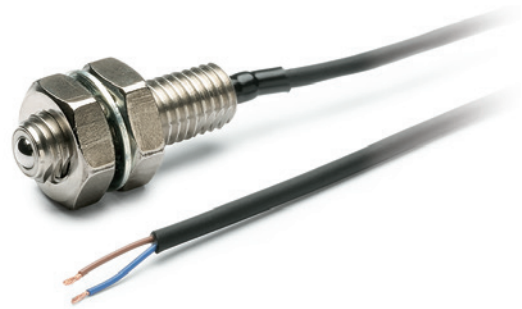

Code	Description	d1	d2	l1	l2	s	sw	w1 ±0.1 Switching stroke	w2 ±0.1 Spring compression	Spring preload [N]	Spring max load [N]	
GN.33821	GN 615.7-M6-O	M6	3	27	3.5	5	10	0.3	0.8	6	13	29
GN.33822	GN 615.7-M8-O	M8	4	30	5	7	13	0.5	1	8	16	38
GN.33823	GN 615.7-M10-O	M10	5	33	6	8	17	0.7	1.2	10	20	50
GN.33831	GN 615.7-M6-S	M6	3	27	3.5	5	10	0.3	0.8	6	13	29
GN.33832	GN 615.7-M8-S	M8	4	30	5	7	13	0.5	1	8	16	38
GN.33833	GN 615.7-M10-S	M10	5	33	6	8	17	0.7	1.2	10	20	50



Indexing and positioning elements