


SKU:MBT0021-EN (<https://www.dfrobot.com/product-2026.html>)

(<https://www.dfrobot.com/product-2026.html>)

1.Introduction

This is the latest version of Maqueen Plus, a programming robot for STEAM education. Optimized with more expansion ports, larger capacity power supply and larger body, the Maqueen Plus V2.0 can be perfectly compatible with more peripheral components like HuskyLens AI camera and Maqueen Mechanic kits, which makes it an accessible STEAM robot teaching tool for primary and secondary students. Besides, it can be not only suitable for classroom teaching, but also can be used for after-school extended exercises and robot competitions. Besides all the functions of Maqueen Lite, it offers richer and more flexible functions and stronger performance. Whether you have ever used Maqueen series products or not, you'll find it very easy to get started.

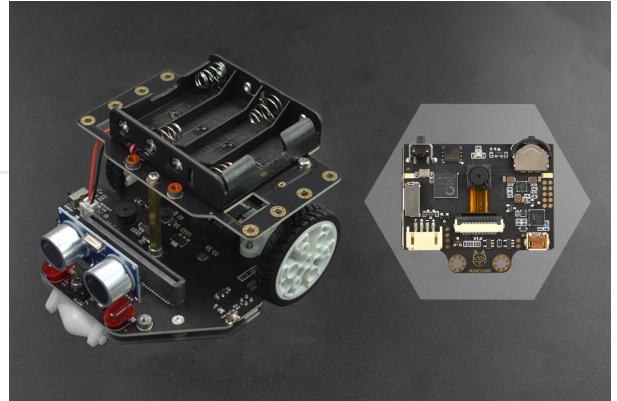



Features

- Increased in size, power, stability, and functionality.
- Compatible with HuskyLens, fascinating performance with AI visual capacity .
- Contents: algorithms and programming, computing system, internet, data .
- Combining with Maqueen Mechanic and GamePad to explore more possibilities.


2.Specification

Specification for Maqueen Plus V1.0	Specification for Maqueen Plus V2.0
<p>1.Power Supply: 3.7V-18650 lithium battery</p> <p>2.Charging Voltage: 5V</p> <p>3.Charging Current: 900mA</p> <p>4.Charging Time: 4h</p> <p>5.Battery Indicator: 4 LEDs</p> <p>6.Drive Motor: N20 motor 260 rpm</p> <p>7.Buzzer * 1</p> <p>8.RGB-LED * 2</p> <p>9.GPIO Expansion Ports: P0 P1 P2 P8 P12 P13 P14 P15 P16</p> <p>10.I2C Expansion Ports * 3</p> <p>11.Servo Expansion Ports 3</p> <p>12.Line Tracking Sensors *6</p> <p>13.Line Tracking Sensor Output Data: analog + digital</p> <p>14.Line Sensor Calibration: support 15.Infrared Receiving Sensor *1</p> <p>16.Ultrasonic Sensor: URM10</p> <p>17.Top Metal Plate * 1</p> <p>18.M3 threaded connections *12</p> <p>19.Map Size: 50cm50cm</p> <p>20.Dimension: 107x100mm/4.21 x3.94"</p>	<p>1. Power Supply:</p> <ul style="list-style-type: none"> - MBT0021-EN: 1.5V AA alkaline battery x 4 or 1.2V AA Ni-MH battery x 4 - MBT0021-EN-18650: 18650 Li-ion battery (3.6V or 3.7V) x 1, onboard charging circuit, MicroUSB and TYPE-C charging interface, 4 hours to charge fully, last about 15h <p>2. Support micro:bit V1 and V2</p> <p>3. N20 All-metal Gear Motor x 2</p> <p>4. Motor Reduction Ratio: 1:150</p> <p>5. Motor Rated Rotation Speed: 133 rpm</p> <p>6. Buzzer x 1</p> <p>7. 5V IO (P0 P1 P2) x 3</p> <p>8. 3.3V IO (P0 P1 P2 P8 P9 P12 P16) x 7</p> <p>9. 3.3V I2C x 2</p> <p>10. 5V I2C x 1</p> <p>11. Large Size LED Car Lights x 2</p> <p>12. RGB Ambient Lights x 4</p> <p>13. Line-tracking Sensor x 5</p> <p>14. Line-tracking Sensor with One-key Calibration</p> <p>15. IR Receiver x 1</p> <p>16. SRO4 Ultrasonic Module x 1</p> <p>17. Dimension: 136mm×65mm/5.35×2.56"</p> <p>18. Programming Platform: Mind+ (https://mindplus.dfrobot.com/), MakeCode (https://makecode.microbit.org/)</p>

Board Overview for Maqueen V1.0

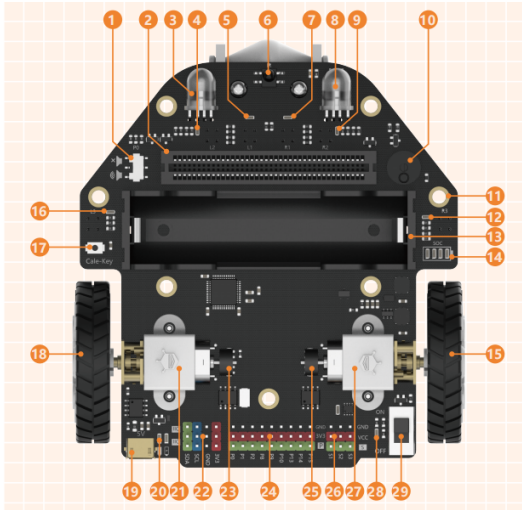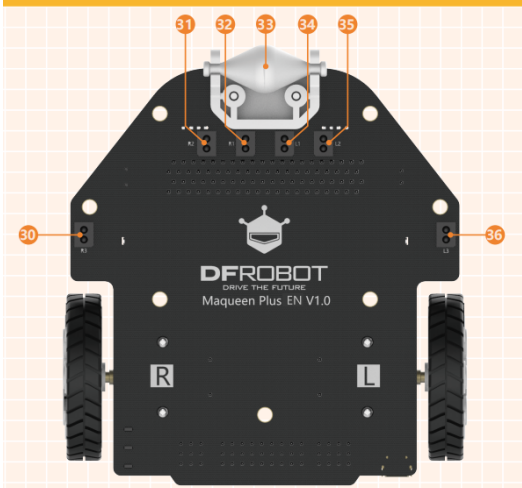
	<ul style="list-style-type: none"> 1 Buzzer switch 2 micro:bit socket 3 RGB-LED-L 4 L2 indicator LED 5 L1 indicator LED 6 Infrared receiver 7 R1 indicator LED 8 RGB-LED-R 9 R2 indicator LED 10 Buzzer 11 M3 Mounting holes 12 R3 indicator LED 13 Battery case 14 Electricity indicator LED 15 Right wheel 16 L3 indicator LED 17 Line-tracking Calibration Key 18 Left wheel 19 Charging port 20 Charging indicator LED 21 Motor-L 22 IIC expansion port 23 Encoder-L 24 GPIO port 25 Encoder-R 26 Servo port 27 Motor-R 28 Power supply indicator LED 29 Power supply switch
<p style="background-color: #FFD700; padding: 2px; text-align: center;">Back view for Maqueen Plus main-board</p> 	<ul style="list-style-type: none"> 30 R3 line-tracking sensor 31 R2 line-tracking sensor 32 R1 line-tracking sensor 33 Support wheel 34 L1 line-tracking sensor 35 L2 line-tracking sensor 36 L3 line-tracking sensor

Board Overview for Maqueen V2.0

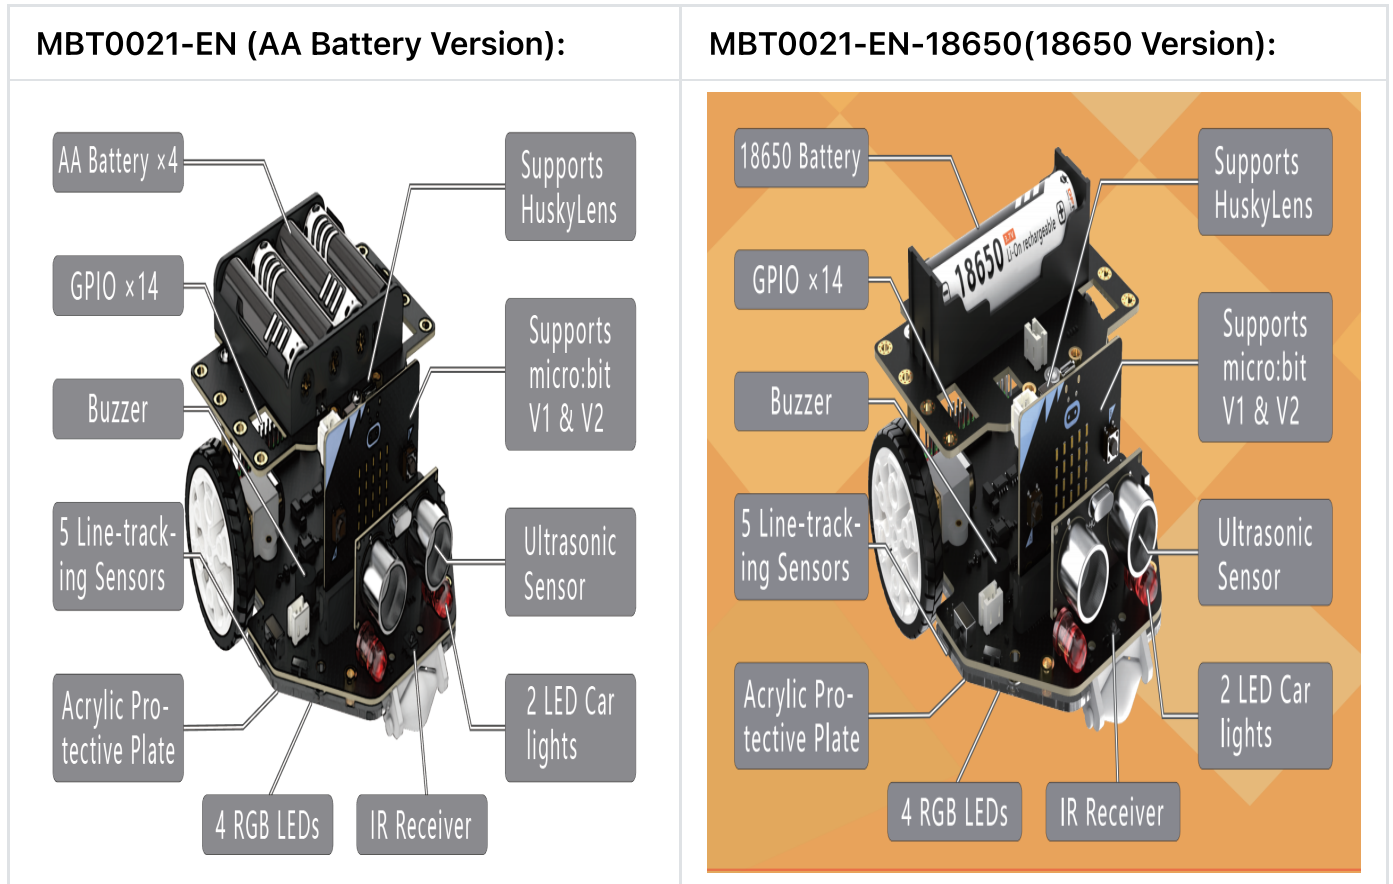

Battery Usage and Charging

The Maqueen PlusV2 AA battery version supports 1.5V AA batteries and 1.2V Ni-MH rechargeable AA batteries. Please be careful not to use AAA batteries. AA batteries are available in most supermarkets. It should be noted that the 1.5V alkaline battery is disposable and cannot be recharged, otherwise it may explode or catch fire.

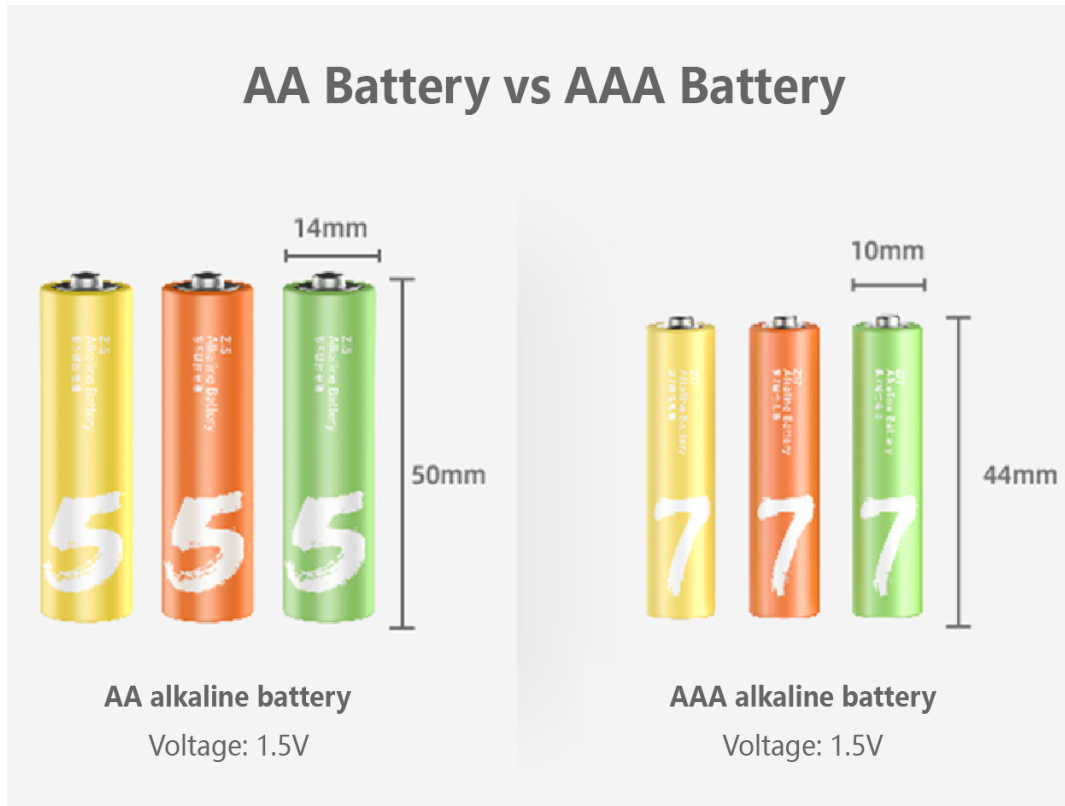

Ni-MH rechargeable batteries are safer than lithium batteries and are less prone to explosion and fire. The voltage is 1.2V per cell. The size of the Ni-MH battery is the same as that of the AA alkaline battery. There is no onboard charging circuit designed on Maqueen Plus V2.0, considering that it is dangerous if the user accidentally recharges the alkaline battery. Therefore, if you need to use Ni-MH batteries, you need to buy Ni-MH rechargeable batteries and charger sets.

Note: Please pay attention to the polarity when installing battery.

3.Introduction to Teaching Contents and Documents


An advanced version of micro:Maqueen Lite(4.0), micro:Maqueen Plus comes with a larger and more stable chassis, and more function integrated, supporting HuskyLens AI vision sensor. 15 teaching projects are provided for students to learn robotics as well as algorithms & programming and computing system in practice. Moreover, there are 6 structure expansion projects and 6 AI projects that enable students to study internet and data analysis when combining Maqueen Plus with Mechanic Accessories or HuskyLens sensor.

HUSKYLENS/HUSKYLENS PRO

An easy-to-use powerful artificial intelligence vision sensor.

SKU • SEN0305/SEN0336

With built-in machine learning technology, it can complete AI training only with one button. The main functions the sensor included are as follows:

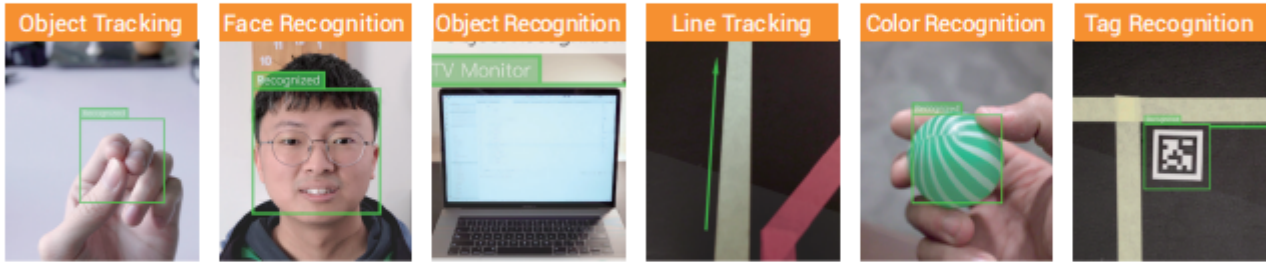

micro:Maqueen Mechanic

SKU • ROB0163-EN

Mechanic Accessories turning Maqueen Lite/Plus into various shapes, bringing infinite joy to classroom teaching!

micro: GamePad

SKU • DFR0536

Use a GamePad to remotely control Maqueen Lite or Maqueen Plus via the Radio on micro:bit. More interesting functions and flexible controls for interactive projects!

Refer to CSTA curriculum standard, the course catalog and field distribution are shown below:

Maqueen Plus Tutorial

Making Difficulty ★ ★ ★ Programming Difficulty ★ ★ ★

Catalog		Field	Field Distribution Chart
Beginner	Lesson 1 Introduction to Maqueen Plus	Computing System	<p>Maqueen Plus Robot Tutorial for Beginner Maqueen Plus Robot Advanced Tutorial</p> <p>Computing Systems</p> <p>Data and Analysis</p> <p>Networks and the Internet</p> <p>Impacts of Computing</p> <p>Algorithms and Programming</p>
	Lesson 2 Let's move, Maqueen!	Algorithm & Programming	
	Lesson 3 Walking Emoji		
	Lesson 4 City Defender-A Police Car	Computing System Algorithm & Programming Data Analysis	
	Lesson 5 Light Sensing Robot		
	Lesson 6 Moth Robot	Algorithm & Programming	
	Lesson 7 Little Ranging Expert	Computing System Algorithm & Programming	
	Lesson 8 Car Reversing Helper		
	Lesson 9 Line-tracking Robot		
	Lesson 10 Tour of Crossroad		
	Lesson 11 IR-controlled Robot	Network & Internet Algorithm & Programming	
	Lesson 12 Motion Sensing Robot		
	Lesson 13 Crazy Racing	Computing System Data Analysis Algorithm & Programming	
	Lesson 14 Speed Recorder		
	Lesson 15 Firefighting Robot		
Advanced	Lesson 1 Relay Transport	Algorithm & Programming Computing System Network & Internet Data Analysis	
	Lesson 2 Vehicle Sharing	Computing System Algorithm & Programming Data Analysis	
	Lesson 3 Auto-Tracking Vehicle	Network & Internet Computing System Algorithm & Programming	
	Lesson 4 Fixed-Point Transportation	Computing System Algorithm & Programming	
	Lesson 5 Self Driving Truck		
	Lesson 6 Out of the Maze	Data Analysis Algorithm & Programming	

Maqueen Plus Visual Recognition Tutorial Making Difficulty ★★ Programming Difficulty ★★★

	Catalog	Field	Field Distribution Chart
Beginner	Lesson 1 Numbered Musical Notation of Color	Computing System Algorithm & Programming	
	Lesson 2 Easy ETC (Electronic Toll Collection) System	Computing System Algorithm & Programming Data Analysis	
	Lesson 3 AI Sorting Master	Computing System Algorithm & Programming	
	Lesson 4 Undercover Detective		
	Lesson 5 Pokémon		
	Lesson 6 Following the "Right Track"		

3.1 Documents

micro:Maqueen Plus V2

Click to download the tutorial	More tutorials are being updated. If necessary, you can view the MakeCode Graphical Programming for Maqueen V2.0 below.
--------------------------------	---

4. MakeCode Graphical Programming for Maqueen V2.0


- How to use MakeCode: <https://wiki.dfrobot.com/Makecode%20Get-started%20Tutorial> (<https://wiki.dfrobot.com/Makecode%20Get-started%20Tutorial>)
- MakeCode Library Address: https://github.com/DFRobot/pxt-DFRobot_MaqueenPlus_v20 (https://github.com/DFRobot/pxt-DFRobot_MaqueenPlus_v20)

Quick Start Guide


Step 1. Install battery




Step 2. Plug in the ultrasonic sensor

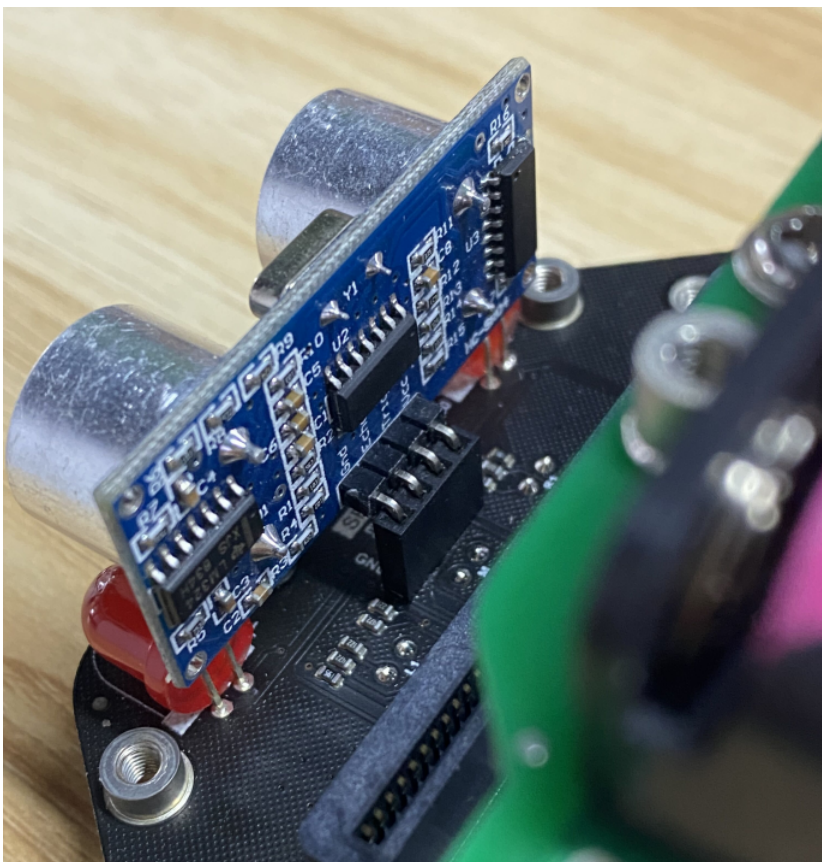

Step 3. Insert the micro:bit board

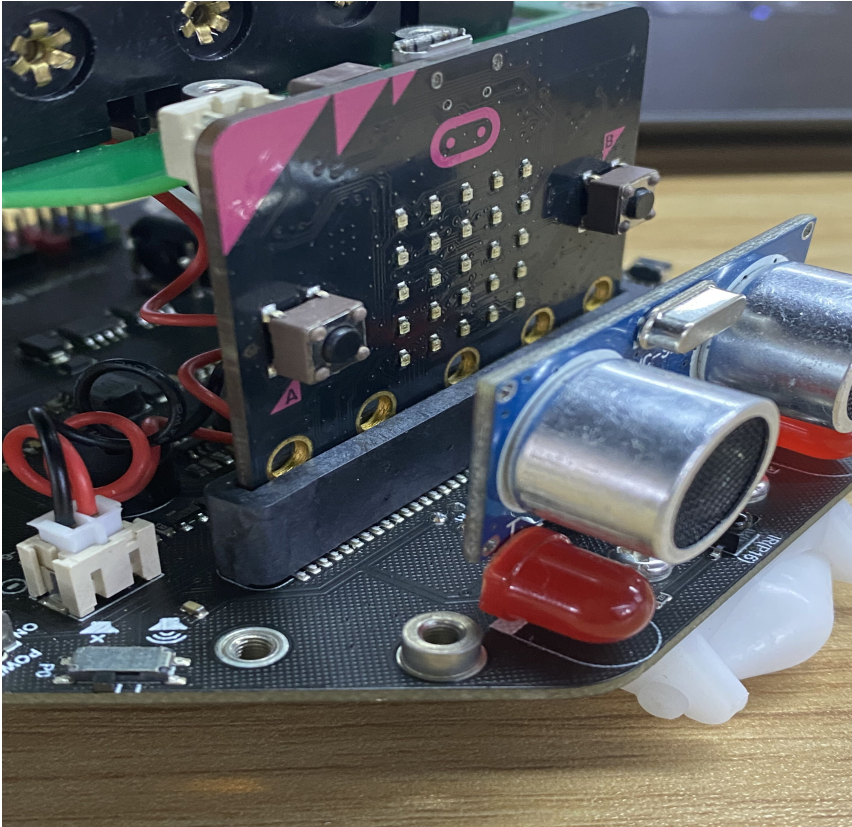

Step 4. Connect the board to a PC via USB cable

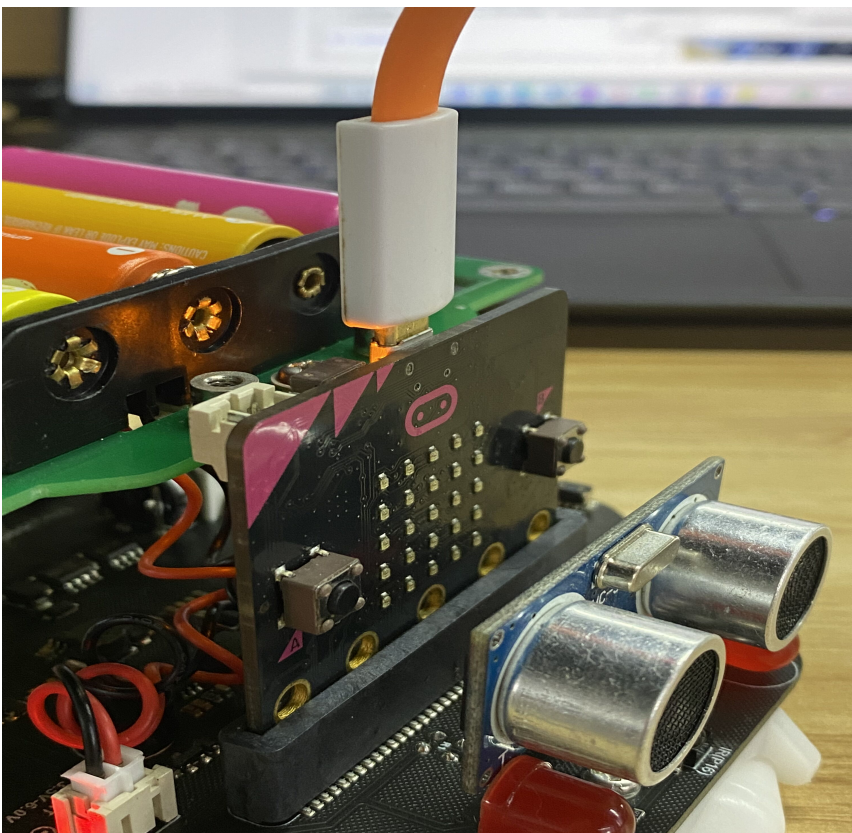

Step 5. Click the sample program link, select "Edit" on the opened webpage, and download program into micro:bit.

Sample Program: <https://makecode.microbit.org/dshE16f3ofaK>

Sample Program: https://makecode.microbit.org/_dshFJ6f3gfaK
(https://makecode.microbit.org/_dshFJ6f3gfaK)

Microsoft | MakeCode

Maqueen Plus V2 Edit Code

micro:bit ▶ Simulator Blocks JavaScript Edit

on start

- init maqueen plus V2
- control all led light open
- set RGB brightness to 100
- set R to 0
- set G to 1
- set B to 2
- set P to 3

forever

- if R ≤ 3 then
 - RGB light R show color
 - change R by 1
- else
 - set R to 0
 - if G ≤ 3 then
 - RGB light G show color
 - change G by 1
 - else
 - set G to 0
 - if B ≤ 3 then
 - RGB light B show color
 - change B by 1
 - else
 - set B to 0
 - if P ≤ 3 then
 - RGB light P show color
 - change P by 1

forever

 - set distance to set ultrasonic sensor T
 - set direction to pick random 1 to 3
 - if distance < 30 and direction = 1 then
 - set left motor direction rotate forward
 - set right motor direction rotate backward
 - pause (ms) 1000
 - if direction = 2 then
 - set left motor direction rotate backward
 - set right motor direction rotate forward
 - pause (ms) 1000
 - else
 - set all motor direction rotate forward


Click Edit Code

Microsoft MakeCode | Terms of Use | Privacy

The content above is provided by a user, and is not endorsed by Microsoft. [Report abuse](#) if you think it's not appropriate.

1. Click Download
2. Saved in "microbit" drive letter

Step 6. Unplug the USB cable and turn on the power switch.

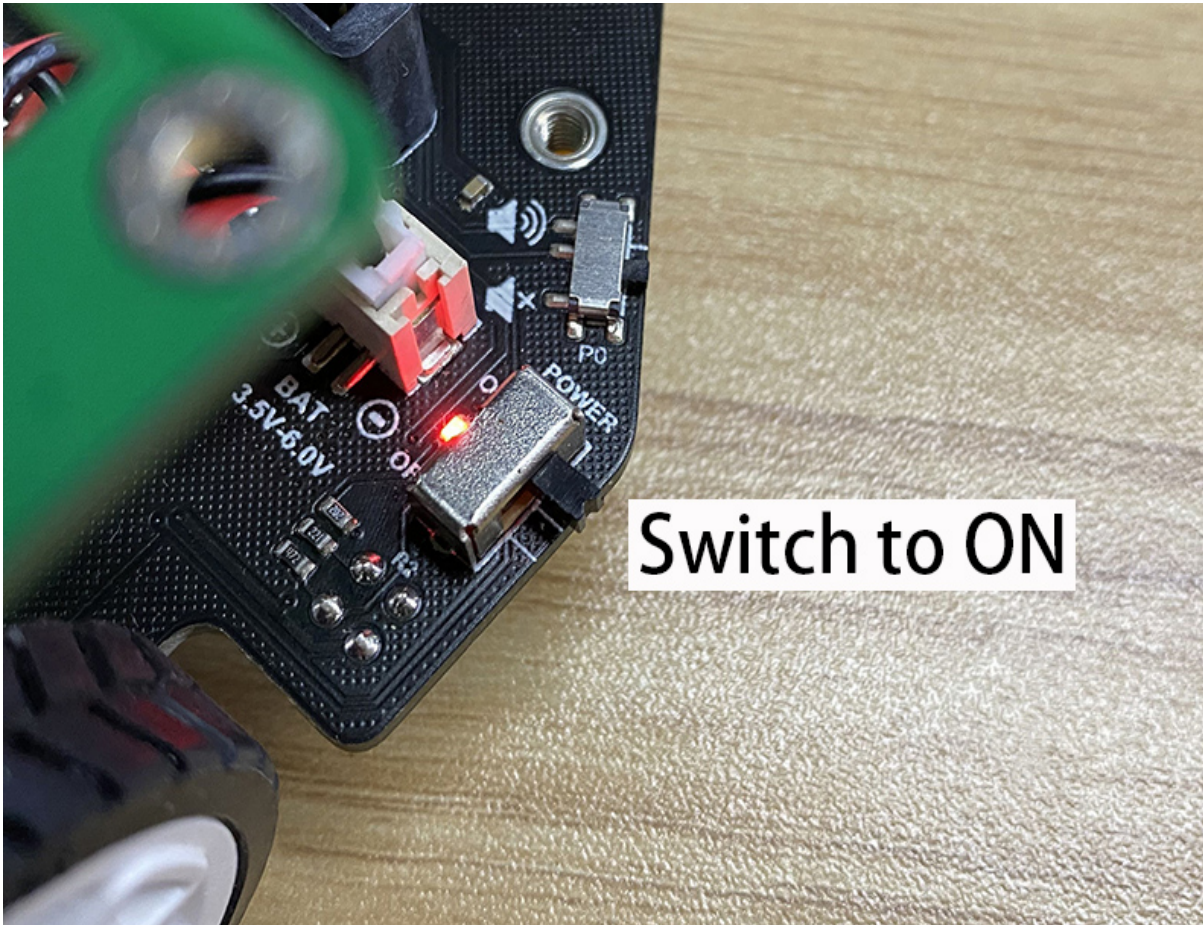


After the above operations, we downloaded an automatic obstacle avoidance robot program to the board. Put Maqueen Plus on the ground, it will automatically drive forward and automatically detect whether there are obstacles within 30cm in front. If there are obstacles, Maqueen Plus will automatically turn around to avoid obstacles and continue driving.

4.1 Light-controlled Maqueen Plus

The following program calls the light sensor of the micro:bit motherboard. Normally, the car is in a stopped state, and the RGB light at the bottom lights up in color. When the flashlight illuminates the front side of the micro:bit, the car goes forward, the bottom RGB light goes out, and the front lights turn on.

The value of the light sensor is an analog value between 0 and 255, which is used to indicate the intensity of light. In the program, we take a light intensity value of 100 as the demarcation point. When the light intensity is greater than 100, the car is started, otherwise, the car is stopped.

Program Link: https://makecode.microbit.org/_26hJo3HLbaqw
(https://makecode.microbit.org/_26hJo3HLbaqw)

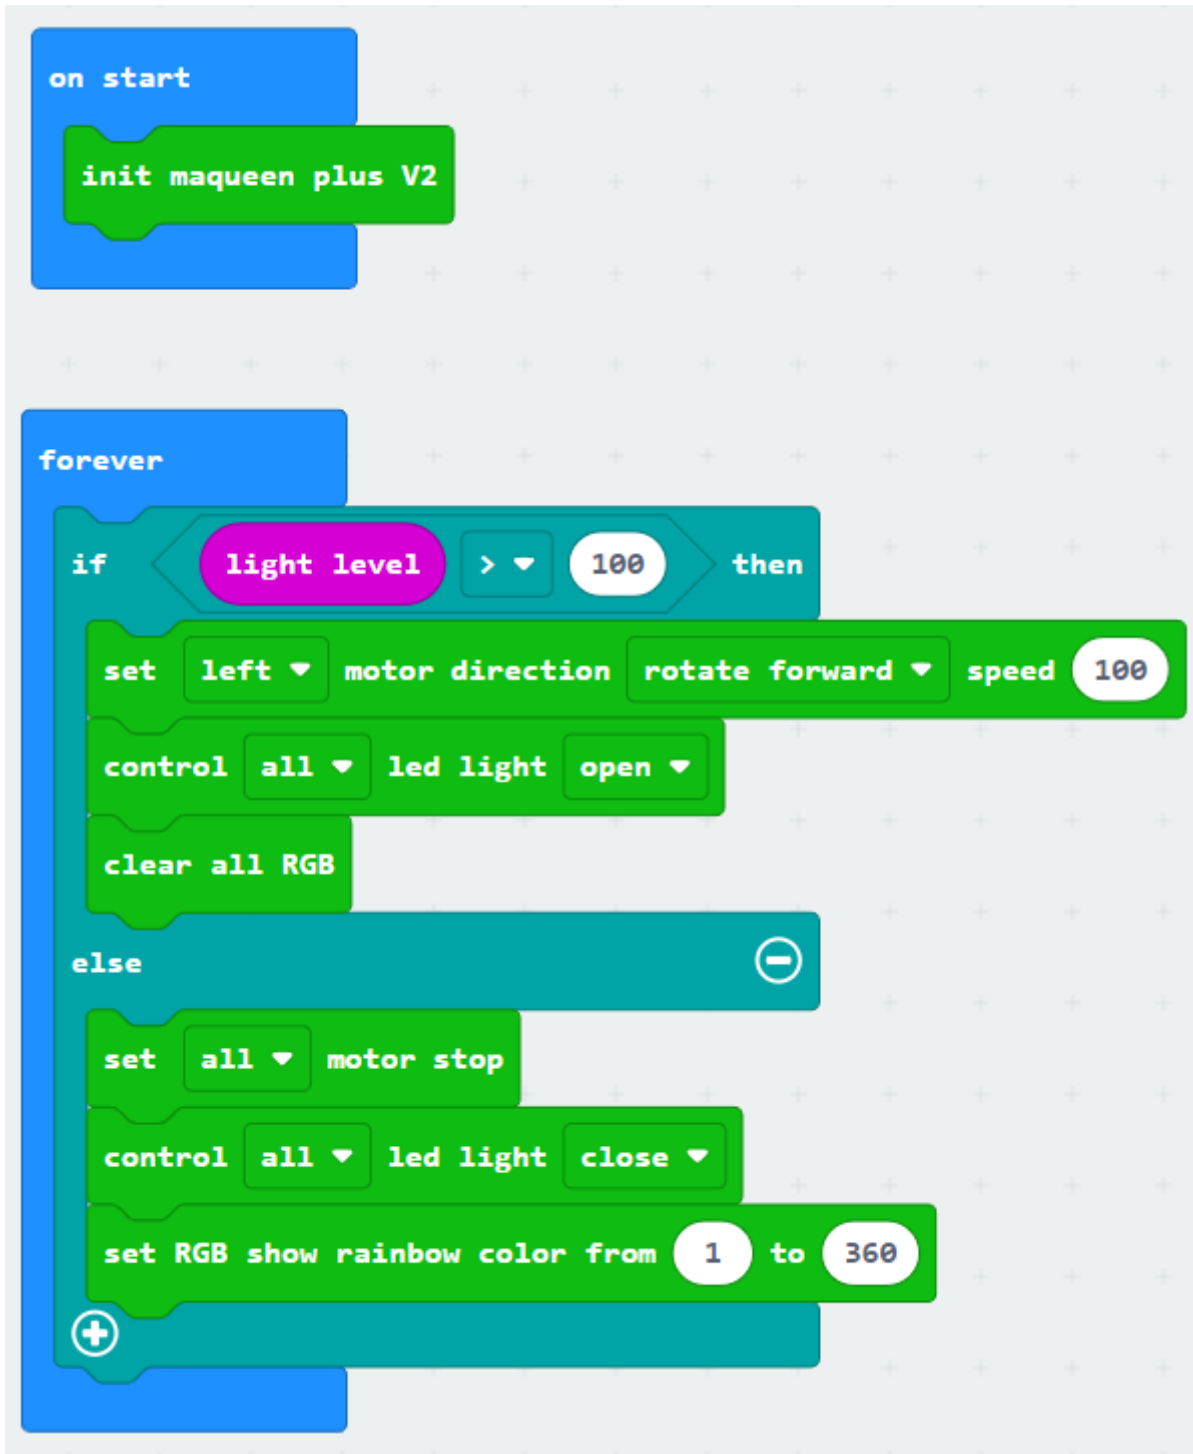


4.2 Sound-controlled Maqueen Plus(only supports micro:bit V2.0)

The following program calls the sound sensor on the micro:bit V2 motherboard. When you clap your hands, the car starts to drive and turns on the lights. When you clap your hands again, the car stops and turns off the lights. Repeat in this way.

In the program, when the sound is detected to be greater than 100, the state of a Boolean value is reversed. Next, the program checks whether the Boolean value is true, if it is true, the car moves forward. if it is false. the car stops.

Program Link: https://makecode.microbit.org/_T89YbzEyeF2m
 (https://makecode.microbit.org/_T89YbzEyeF2m)

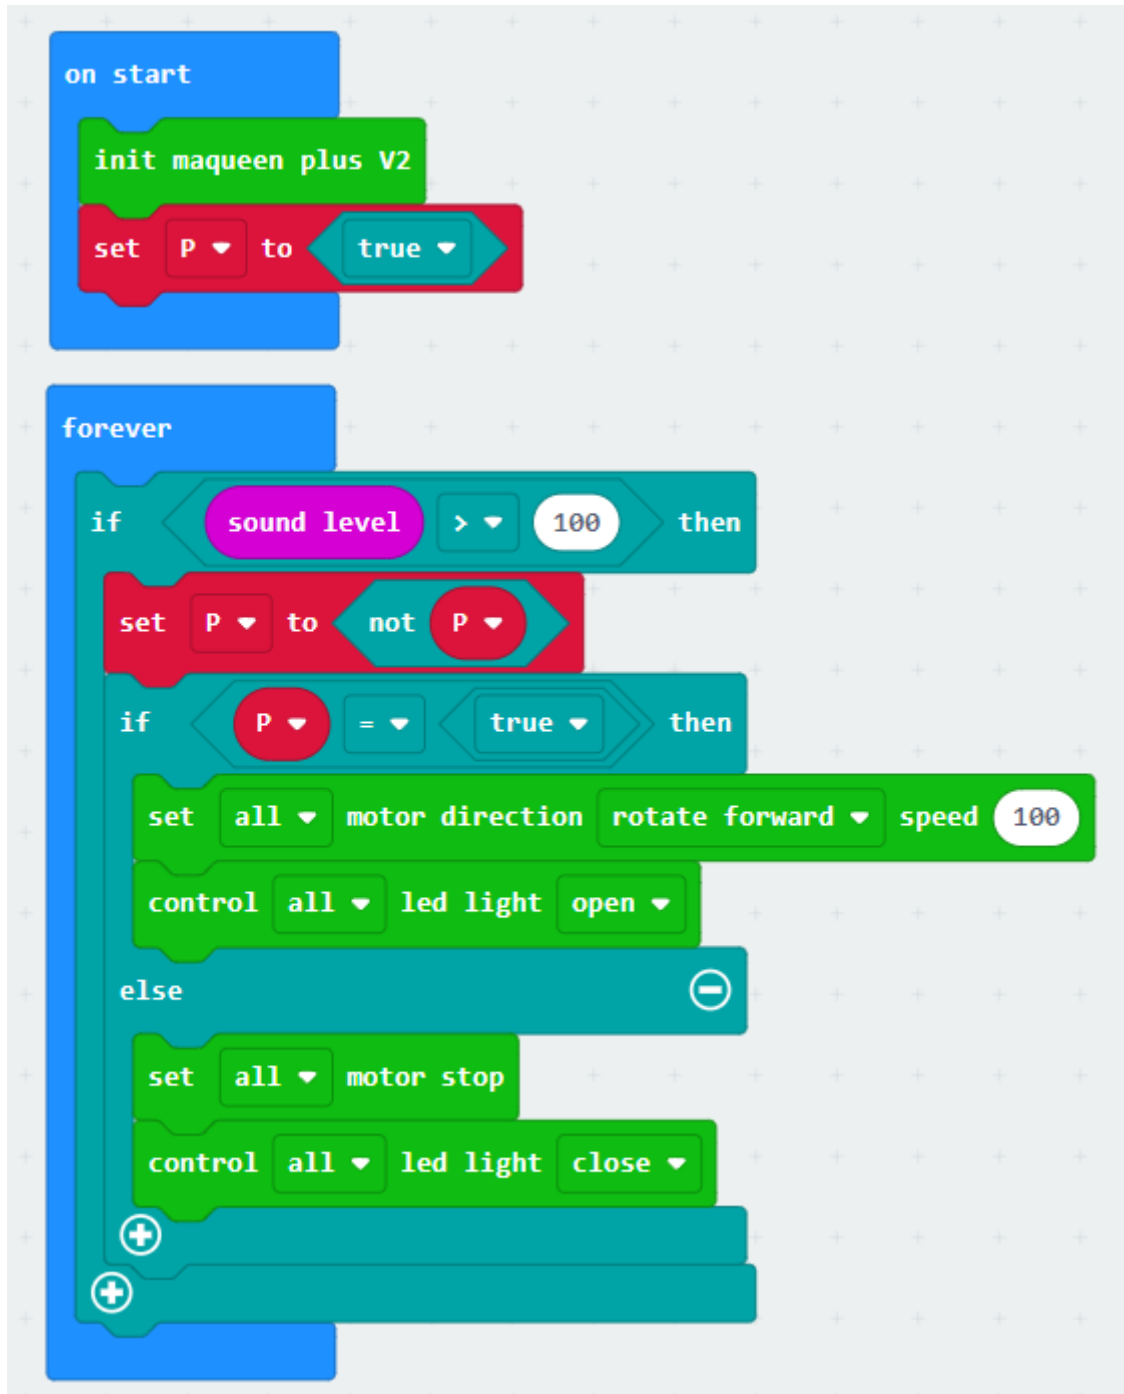

4.3 obstacle Avoidance Robot

The function realized by the following program is: Maqueen Plus detects whether there is an obstacle in front of it during driving. If there is an obstacle about 30cm ahead, turn to avoid the obstacle and continue driving.

In the program, the distance read by the ultrasonic is assigned to a variable, and then it is judged that if the value of this variable is less than 30, the turning action is performed for one second. After turning for one second, it will continue to detect whether the distance is less than 30cm. If there are no obstacles 30cm ahead, the car will go straight ahead.

Program Link: https://makecode.microbit.org/_AR3X7gP4cVim
 (https://makecode.microbit.org/_AR3X7gP4cVim)

```

on start
  init maqueen plus V2

forever
  set distance to set ultrasonic sensor TRIG pin P13 ECHO pin P14 read data company:cm
  if distance < 30 and distance ≠ 0 then
    set left motor direction rotate forward speed 100
    set right motor direction rotate forward speed 0
    pause (ms) 1000
  else
    set all motor direction rotate forward speed 100
  
```

After the above procedure is executed, you will find that the car always turns in one direction after encountering an obstacle. Below we will improve the program as follows, let the car encounter obstacles and randomly choose a turning direction to continue driving.

In the program, a module that generates integers randomly is used to randomly produce 1 or 2. If it is judged that the random number is 1, then turn right, if the random number is 2, then turn left.

Program Link: https://makecode.microbit.org/_JyKALkaeh5j5
 (https://makecode.microbit.org/_JyKALkaeh5j5)


```

on start
  init maqueen plus V2

forever
  set distance to set ultrasonic sensor TRIG pin P13 ECHO pin P14 read data company:cm
  set direction to pick random 1 to 2
  if distance < 30 and distance ≠ 0 then
    if direction = 1 then
      set left motor direction rotate forward speed 100
      set right motor direction rotate forward speed 0
      pause (ms) 1000
    +
    if direction = 2 then
      set left motor direction rotate forward speed 0
      set right motor direction rotate forward speed 100
      pause (ms) 1000
    +
  else
    set all motor direction rotate forward speed 100
  +

```

4.4 Line-tracking Robot

The function of the following program is: put the car on the circular black line map, the car will use the three line-tracking sensor probes set at the bottom to detect whether the car is driving on the black line. If it deviates from the black line, the car will correct its driving direction in real time so that the car will always follow the black line.

There are 5 line-tracking sensor probes in Maqueen Plus V2. In this program, three probes, L1, R1, and M, are used to detect black lines. L2 and R2 are not used yet.

When the line-tracking probe detects a black line, the output value is 1, and when it detects a white line, the output value is 0. With this feature, three line-tracking sensors can be used to detect the black lines, and the status of multiple probes can be used to determine the position of the black line in real time and how the car should turn to correct deviation.

Program Link: https://makecode.microbit.org/_TMa48UKa5XAA

(https://makecode.microbit.org/_TMa48UKa5XAA)

```

on start
  init maqueen plus V2

forever
  while (
    read line sensor L1 state = 0
    or
    read line sensor M state = 0
    or
    read line sensor R1 state = 0
  )
  do
    call Line patrol

function Line patrol
  if (
    read line sensor L1 state = 0
    and
    read line sensor M state = 1
    and
    read line sensor R1 state = 0
  ) then
    set all motor direction rotate forward speed 100

  if (
    read line sensor L1 state = 1
    and
    read line sensor M state = 1
    and
    read line sensor R1 state = 0
  ) then
    set left motor direction rotate forward speed 40
    set right motor direction rotate forward speed 100

  if (
    read line sensor L1 state = 1
    and
    read line sensor M state = 0
    and
    read line sensor R1 state = 0
  ) then
    set left motor direction rotate forward speed 0
    set right motor direction rotate forward speed 100

  if (
    read line sensor L1 state = 0
    and
    read line sensor M state = 1
    and
    read line sensor R1 state = 1
  ) then
    set left motor direction rotate forward speed 100
    set right motor direction rotate forward speed 40

  if (
    read line sensor L1 state = 0
    and
    read line sensor M state = 0
    and
    read line sensor R1 state = 1
  ) then
    set left motor direction rotate forward speed 100
    set right motor direction rotate forward speed 0
  
```

In the above procedure, we did not use the two probes L2 and R2 on the two sides. If the car is driven out by mistake, it will be difficult to return to find the black line to continue driving. In the following procedure, we will use five probes and add another layer of detection on the left and right sides, so that the car can return in time after it finds that it was on the wrong path.

Program Link: https://makecode.microbit.org/_52di8s3WKMoF

(https://makecode.microbit.org/_52di8s3WKMoF)

https://makecode.microbit.org/_XucP5zJyeCba

(https://makecode.microbit.org/_XucP5zJyeCba)

```
on start
  init maqueen plus V2

forever
  while (read line sensor L2 state = 0 and read line sensor R2 state = 0)
  do
    if (read line sensor L2 state = 1 and read line sensor R2 state = 0) then
      set left motor direction rotate forward speed 0
      set right motor direction rotate forward speed 100
      if (read line sensor L1 state = 1 or read line sensor M state = 1 or read line sensor R1 state = 1) then
        call line patrol
      else
        if (read line sensor L2 state = 0 and read line sensor R2 state = 1) then
          set left motor direction rotate forward speed 100
          set right motor direction rotate forward speed 0
          if (read line sensor L1 state = 1 or read line sensor M state = 1 or read line sensor R1 state = 1) then
            call line patrol
          else
            call line patrol
        else
          call line patrol
```

```
function Line patrol
  if (read line sensor L1 state = 0 and read line sensor M state = 1 and read line sensor R1 state = 0) then
    set all motor direction rotate forward speed 100
  else
    if (read line sensor L1 state = 1 and read line sensor M state = 1 and read line sensor R1 state = 0) then
      set left motor direction rotate forward speed 40
      set right motor direction rotate forward speed 100
    else
      if (read line sensor L1 state = 1 and read line sensor M state = 0 and read line sensor R1 state = 0) then
        set left motor direction rotate forward speed 0
        set right motor direction rotate forward speed 100
      else
        if (read line sensor L1 state = 0 and read line sensor M state = 1 and read line sensor R1 state = 1) then
          set left motor direction rotate forward speed 100
          set right motor direction rotate forward speed 40
        else
          if (read line sensor L1 state = 0 and read line sensor M state = 0 and read line sensor R1 state = 1) then
            set left motor direction rotate forward speed 100
            set right motor direction rotate forward speed 0
```

4.5 IR-controlled Maqueen Plus

First, let us get familiar with the infrared remote control and key values. Each button on the infrared remote control corresponds to a unique key value. The key value has two systems of

numeration, hexadecimal and decimal. In Maqueen PlusV2, we use decimal. as the picture shows:

Key	Value (In hexadecimal)	Value (In decimal)
Red Key	0xff00	0
VOL+	0xfe01	1
FUNC/STOP	0xfd02	2
Left Arrow	0xfb04	4
Pause	0xfa05	5
Right Arrow	0xf906	6
Down Arrow	0xf708	8
VOL-	0xf609	9
Up Arrow	0xf50a	10
0	0xf30c	12
EQ	0xf20d	13
ST/REPT	0xf10e	14
1	0xef10	16
2	0xee11	17
3	0xed12	18
4	0xeb14	20
5	0xea15	21
6	0xe916	22
7	0xe718	24
8	0xe619	25
9	0xe51a	26



Example 1: In the following example, we use the four buttons 2, 4, 6, and 8 of the infrared remote control to control the car to go forward, turn left, turn right, and back separately. At the same time, we will let the bottom RGB lights and LED car lights light up.

Program Link: https://makecode.microbit.org/_6DgH54fhb3sE
 (https://makecode.microbit.org/_6DgH54fhb3sE)

```

on start
  init maqueen plus V2
  set RGB show rainbow color from 1 to 360
  control all led light open

on IR received message
  if message = 17 then
    set left motor direction rotate forward speed 100
  if message = 25 then
    set left motor direction backward speed 100
  if message = 20 then
    set left motor direction rotate forward speed 100
    set right motor direction rotate forward speed 0
  if message = 22 then
    set left motor direction rotate forward speed 0
    set right motor direction rotate forward speed 100

```


Download the program to the micro:bit, press the "2" button of the infrared remote control, and Maqueen PlusV2 will drive forward. Press the "4" button, Maqueen PlusV2 turns to the left, press the "6" button, Maqueen PlusV2 turns to the right, press the "8" button, Maqueen PlusV2 drives backwards.

However, during the operation, we found two problems:

1. When I let the car turn, as long as I press the "4" button or the "6" button, the car will spin on the spot, the control feels inflexible, and it does not conform to the actual vehicle control method.

2. When the car is moving backwards, press the "2" button to make the car move forward, and the car will fall backward due to the reaction force. We try to optimize the code and operating experience:

Program Link: https://makecode.microbit.org/_TboWd2ihjD2k
 (https://makecode.microbit.org/_TboWd2ihjD2k)

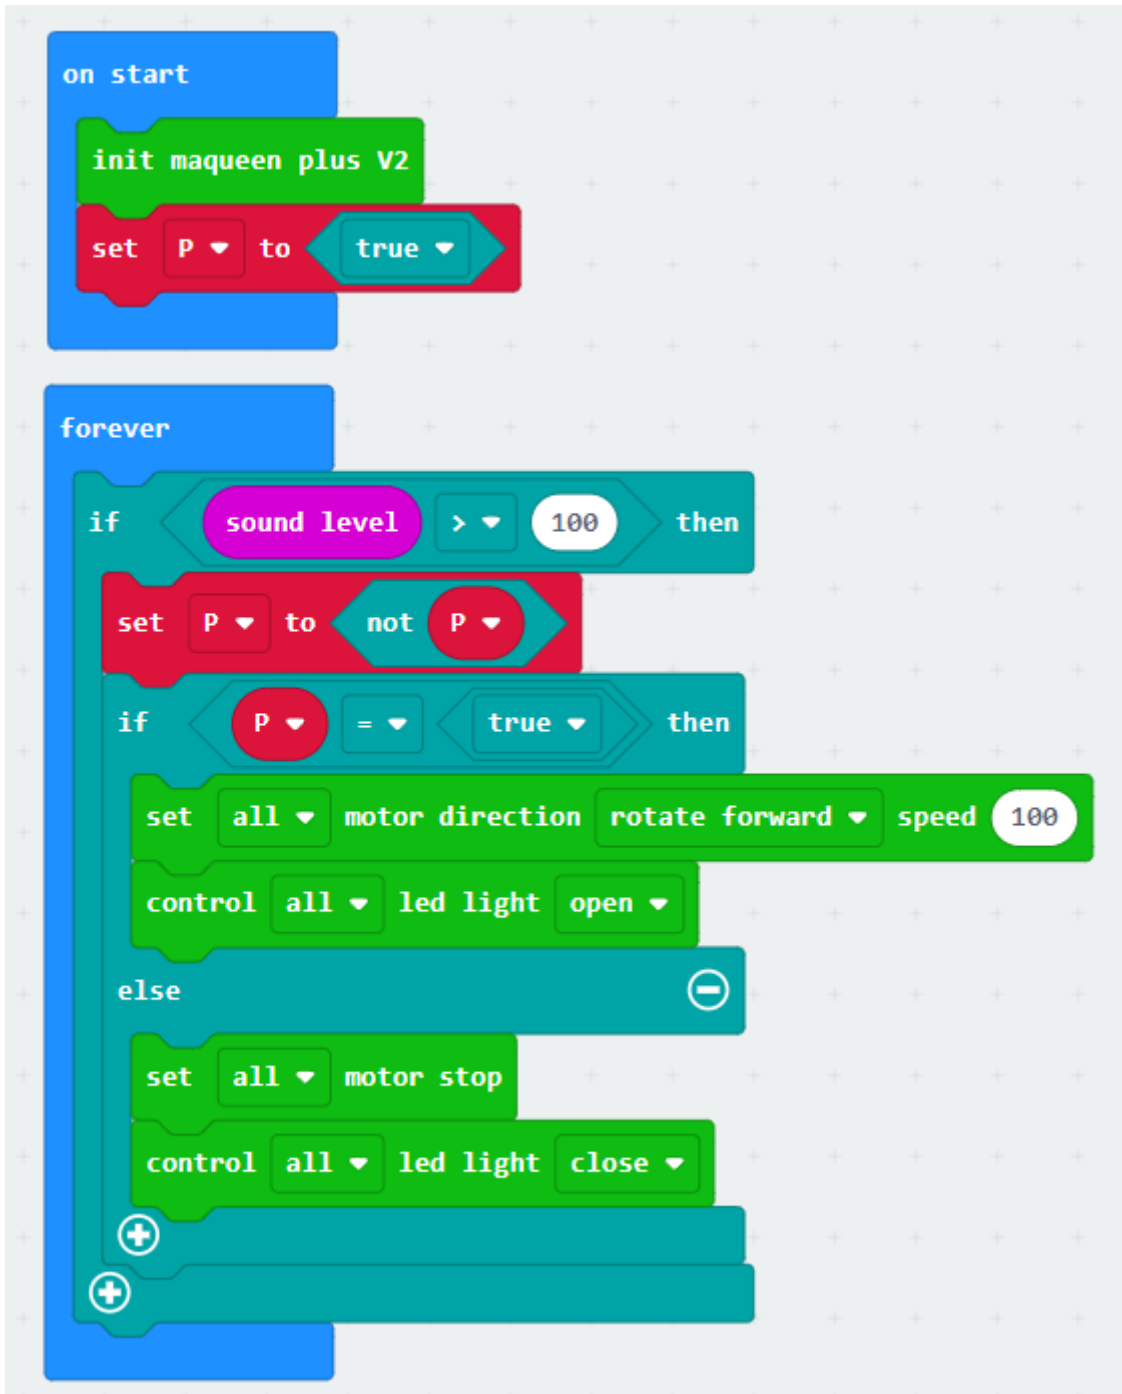

In this example, we have made some changes to the remote control method. When the "4" key (key value 20) or "6" key (key value 22) is pressed, the car is only allowed to turn for a short time (200 milliseconds). In this way, we press once, the car rotates a bit, and then continues straight ahead. If we need a big turn, press it a few more times. When backing, the car will not go back quickly, which will cause the car to roll over due to inertia. Therefore, we changed the back function of pressing the "8" key (key value 25) to stop. In this program, we did not write a part of the program to make the car back. When you write your own program, try to use another button to realize the back function.

4.6 Control Maqueen Plus by Remote Controller

4.3. Control Maqueen Plus by Remote Controller


Here, another way and product to control Maqueen will be used: remote control handle.

Program Link: <https://www.dfrobot.com.cn/goods-1674.html>

(<https://www.dfrobot.com.cn/goods-1674.html>)

Wiki Link: https://wiki.dfrobot.com/Micro_bit_Gamepad_Expansion_Board_SKU__DFR0536

(https://wiki.dfrobot.com/Micro_bit_Gamepad_Expansion_Board_SKU__DFR0536)

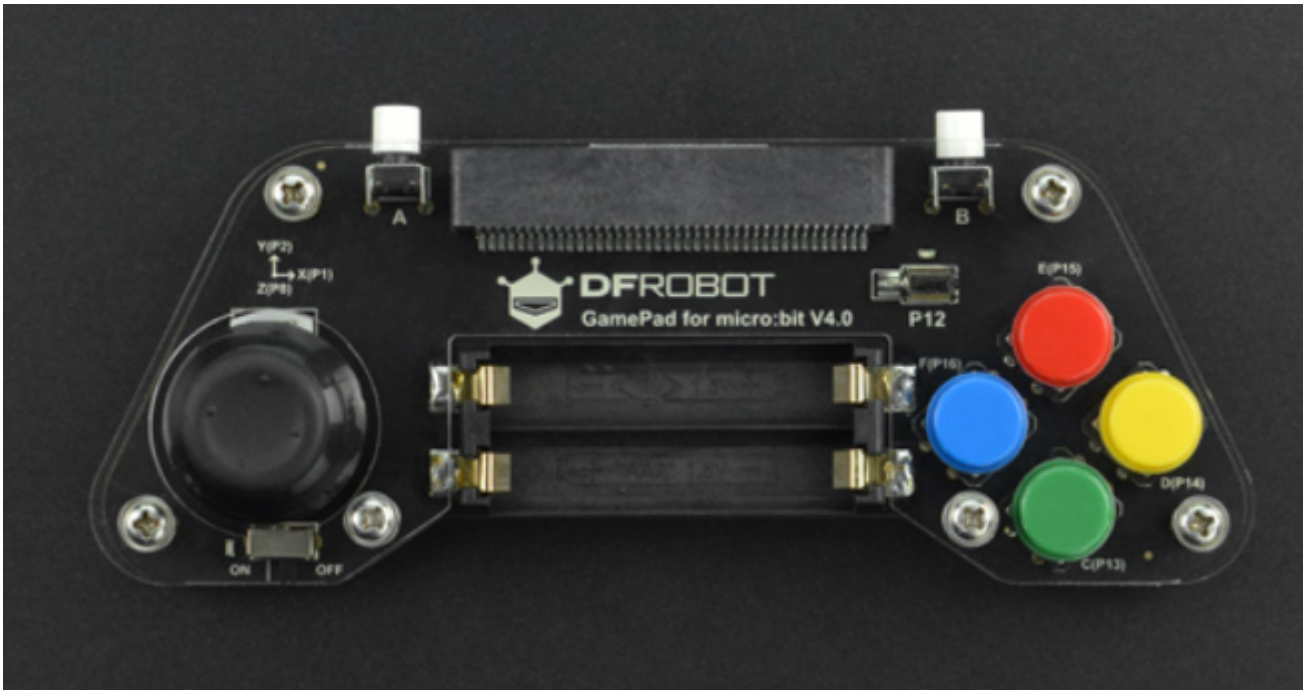

Another micro:bit motherboard needs to be installed on the remote control handle, and the two motherboards communicate through the wireless network to realize the remote control function. Compared with infrared, wireless communication has the characteristics of no directionality and long distance. Next we try to write a remote control car. This time you need to program two motherboards. The motherboard of the car terminal: write the receiving and executing program. Handle end: need to write a program to send instructions.

Remote Controller Program Link: https://makecode.microbit.org/_Ew9VCh414YW3

(https://makecode.microbit.org/_Ew9VCh414YW3)

```
on start
  radio set group 1
  set pull pin P13 to none
  set pull pin P14 to none
  set pull pin P15 to none
  set pull pin P16 to none

forever
  if digital read pin P15 = 0 then
    radio send string "Open"
  else if digital read pin P13 = 0 then
    radio send string "Close"
  else if digital read pin P16 = 0 then
    radio send string "LEDL"
  else if digital read pin P14 = 0 then
    radio send string "LEDR"
  else
    if (analog read pin P2 > 550 and analog read pin P1 > 400 and analog read pin P1 < 600) then
      radio send string "F"
    else if (analog read pin P2 < 450 and analog read pin P1 > 400 and analog read pin P1 < 600) then
      radio send string "B"
    else if (analog read pin P1 < 450 and analog read pin P2 > 400 and analog read pin P2 < 600) then
      radio send string "L"
    else if (analog read pin P1 > 550 and analog read pin P2 > 400 and analog read pin P2 < 600) then
      radio send string "R"
    else
      radio send string "S"
```

Maqueen Plus Car Program Link: https://makecode.microbit.org/_bTPhA5JDs6mA
(https://makecode.microbit.org/_bTPhA5JDs6mA)


```

on start
  radio set group 1

on radio received receivedString
  if receivedString = "LEDL" then
    control left led light open
  else if receivedString = "LEDR" then
    control right led light open
  else if receivedString = "F" then
    set all motor direction rotate forward speed 100
  else if receivedString = "B" then
    set all motor direction backward speed 100
  else if receivedString = "L" then
    set left motor direction rotate forward speed 20
    set right motor direction rotate forward speed 100
  else if receivedString = "R" then
    set left motor direction rotate forward speed 100
    set right motor direction rotate forward speed 20
  else
    control all led light close
    set all motor stop
  
```

Download the corresponding programs to the microbit motherboard on the handle side and the microbit motherboard on the car side respectively. Turn on the power of the handle and the car. Move the joystick on the left side of the handle to control the forward, backward, left and right turn of the car.

However, you may find a problem, we can only control the direction of the car, not the speed of the car. Now let's update the program so that the remote control handle can control both the direction and the speed.

Remote Controller Program Link: https://makecode.microbit.org/_99UJEH9hahwF

(https://makecode.microbit.org/_99UJEH9hahwF)

```

on start
  radio set group 1
  set pull pin P13 to none
  set pull pin P15 to none
  set pull pin P14 to none
  set pull pin P16 to none

forever
  if digital read pin P15 = 0 then
    radio send string "Open"
  else if digital read pin P13 = 0 then
    radio send string "Close"
  else if digital read pin P16 = 0 then
    radio send string "LEDL"
  else if digital read pin P14 = 0 then
    radio send string "LEDR"
  else
    if analog read pin P2 > 550 and analog read pin P1 > 400 and analog read pin P1 < 600 then
      radio send value "F" = analog read pin P2
    else if analog read pin P2 < 450 and analog read pin P1 > 400 and analog read pin P1 < 600 then
      radio send value "B" = analog read pin P2
    else if analog read pin P1 < 450 and analog read pin P2 > 400 and analog read pin P2 < 600 then
      radio send value "L" = analog read pin P1
    else if analog read pin P1 > 550 and analog read pin P2 > 400 and analog read pin P2 < 600 then
      radio send value "R" = analog read pin P1
    else
      radio send string "S"
  
```

Maqueen Plus Car Program Link: https://makecode.microbit.org/_evzJtbUqoLFt
 (https://makecode.microbit.org/_evzJtbUqoLFt)

```

on start
  radio set group 1


on radio received name value
  if name = "F" then
    set all motor direction rotate forward speed map value from low 550 high 1023 to low 10 high 255
  else if name = "B" then
    set all motor direction backward speed map value from low 1 high 450 to low 255 high 10
  else if name = "L" then
    set right motor direction rotate forward speed map value from low 1 high 450 to low 255 high 10
    set left motor direction rotate forward speed 20
  else if name = "R" then
    set left motor direction rotate forward speed map value from low 550 high 1023 to low 40 high 255
    set right motor direction rotate forward speed 20

on radio received receivedString
  if receivedString = "LEDL" then
    control left led light open
  else if receivedString = "LEDR" then
    control right led light open
  else
    control all led light close
    set all motor stop

```

Download the corresponding programs to the micro:bit on the handle side and the microbit motherboard on the car side respectively. Turn on the power of the handle and the car. Gently push the joystick forward, Maqueen Plus will gradually start and speed up. Try turning around and going backward. The speed in each direction is related to the angle of the joystick. You can not only control the direction of the car, but also the speed of the car.


5. Line-tracking Sensor Calibration for Maqueen V2.0

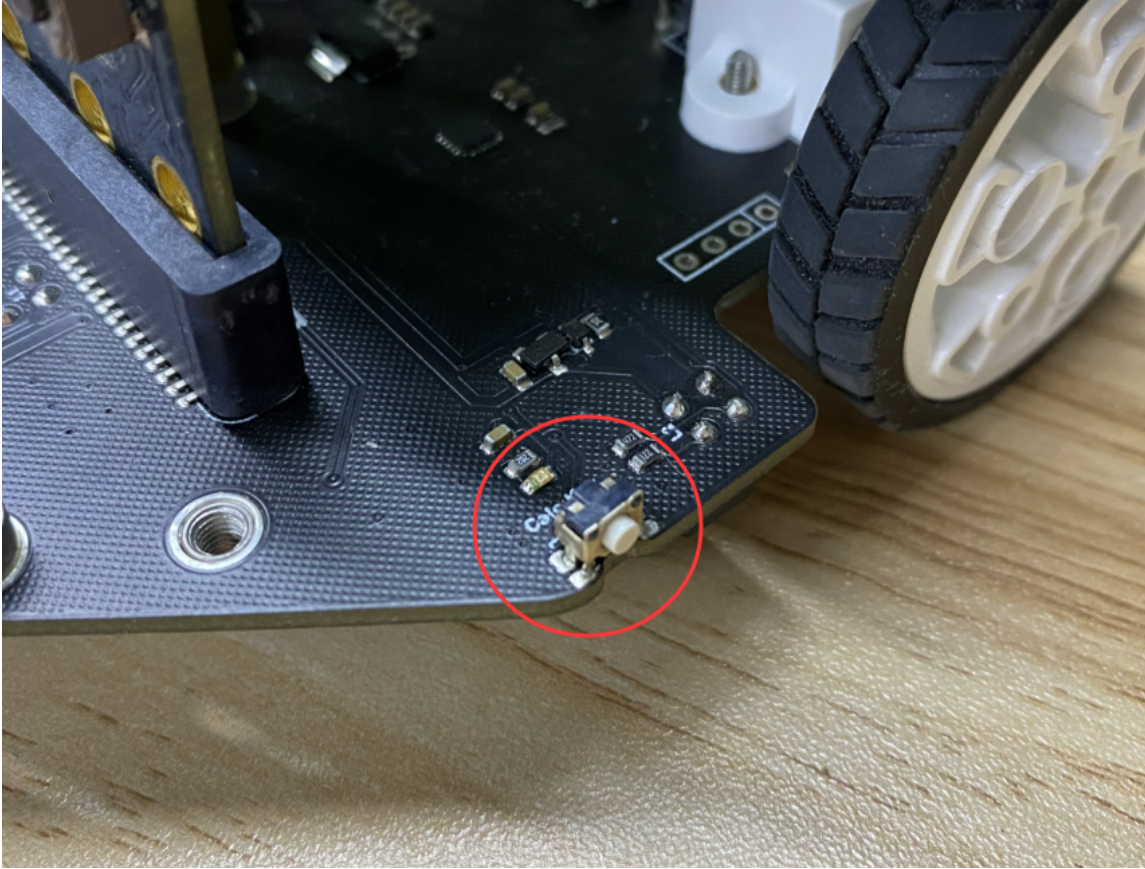


The line-tracking sensor has been calibrated before leaving the factory, and you do not need to calibrate it again. Just like the reset button of digital products, you don't need to use it in most cases. Incorrect calibration methods can also cause the line-tracking sensor to fail.

If you find that the line-tracking sensor does not recognize the black lines that can be recognized normally, then you can try to calibrate it. Methods as below:

1. Place the car on the black block of the map which delivered with the product, and make sure that the 5 sensors are in the black area. as the picture shows:

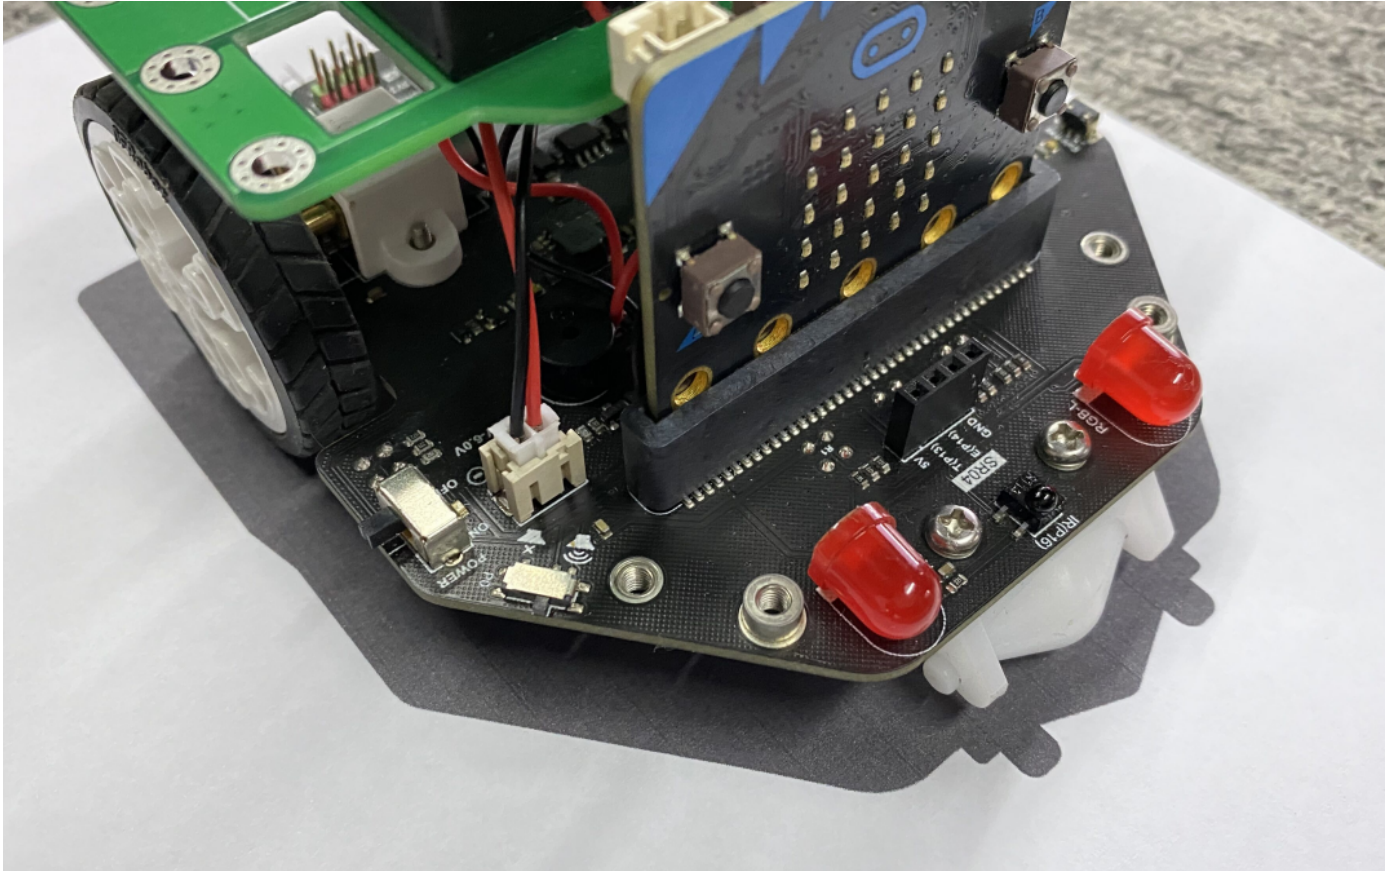


2. Long press the calibration button for about 1 second. At this time, the car lights flash and the calibration is completed.

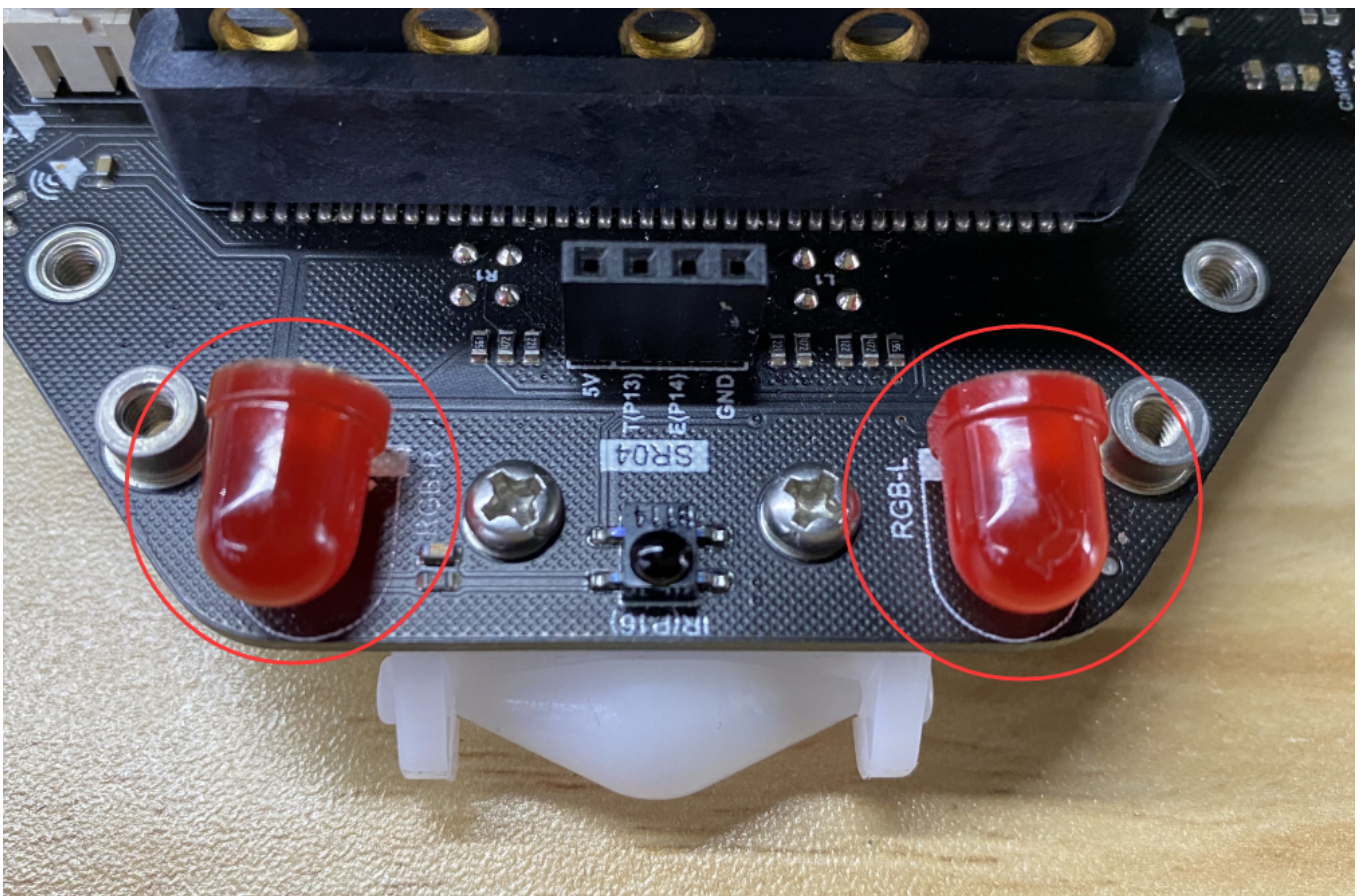

3. Check the calibration result: when the calibration done, place the line-tracking sensor in the black area, the line-tracking indicator is on, and the indicator is off in the white area, indicating that the calibration is correct.


6. Buzzer Switch for Maqueen V2.0


When you don't need to use the buzzer, but you want to use the P0 port, or use the micro:bit V2 motherboard, you can use this switch to turn off the buzzer. The picture shows the state of turning on the buzzer. Flick to the other side to turn off the buzzer sound.

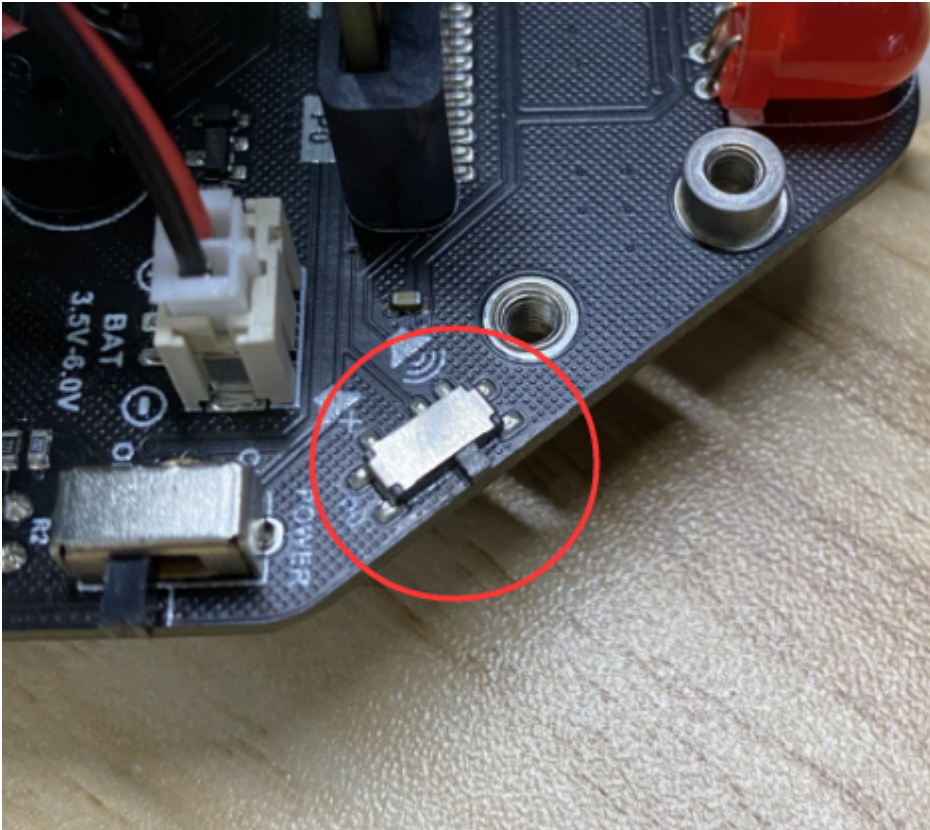


7. Install HuskyLens Camera for Maqueen V2.0

1. Install the two copper pillars delivered by the product in the position as shown in the figure.

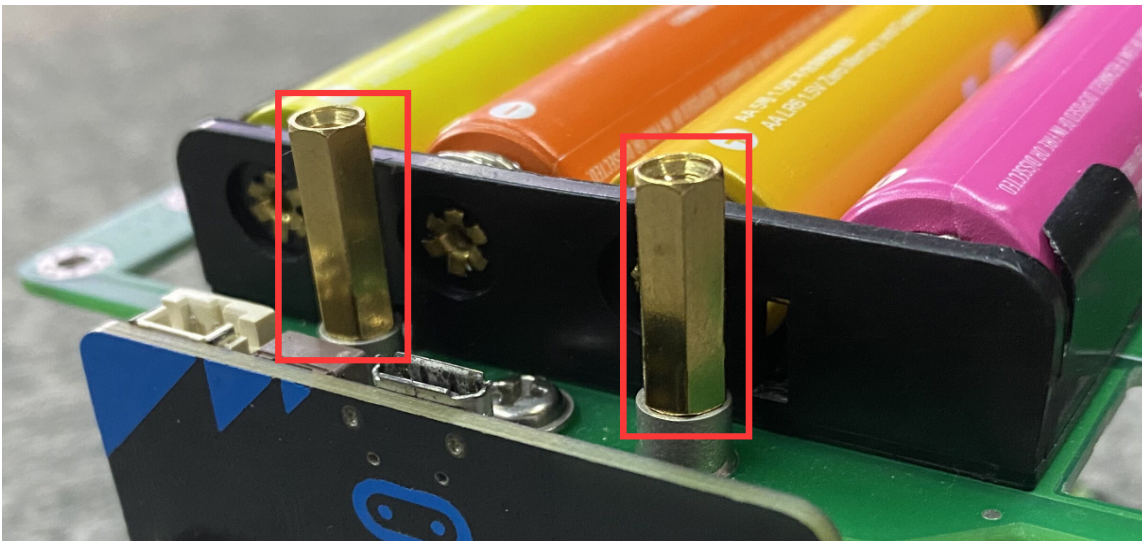


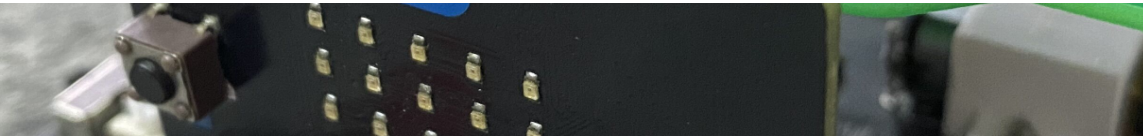


2. Fix the arc-shaped bracket (the bracket and mounting screws are provided with the HuskyLens product) on the copper column with screws.

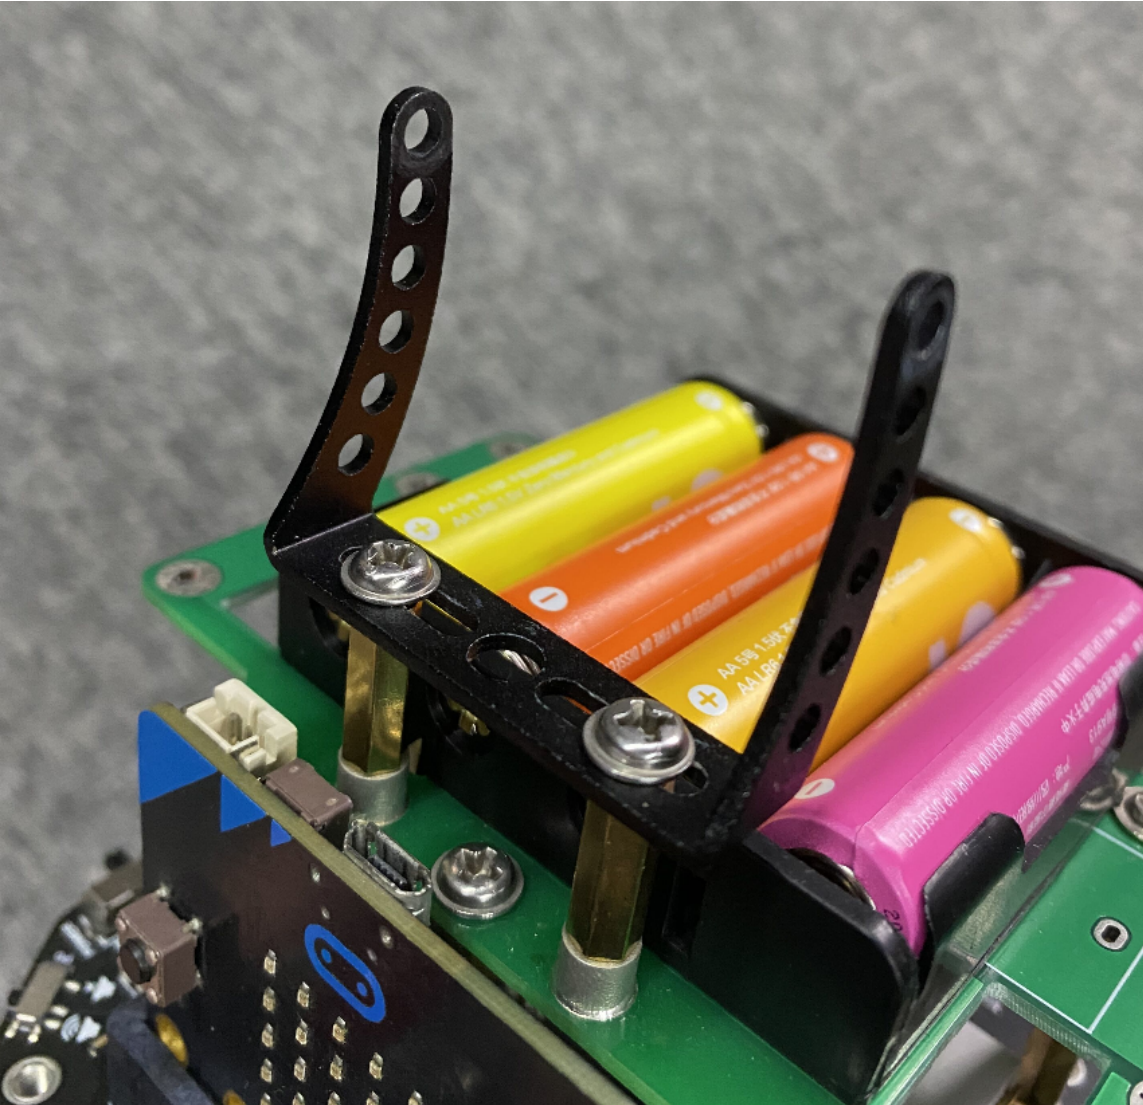




3. Install the other bracket (the bracket and mounting screws are provided with the HuskyLens product)

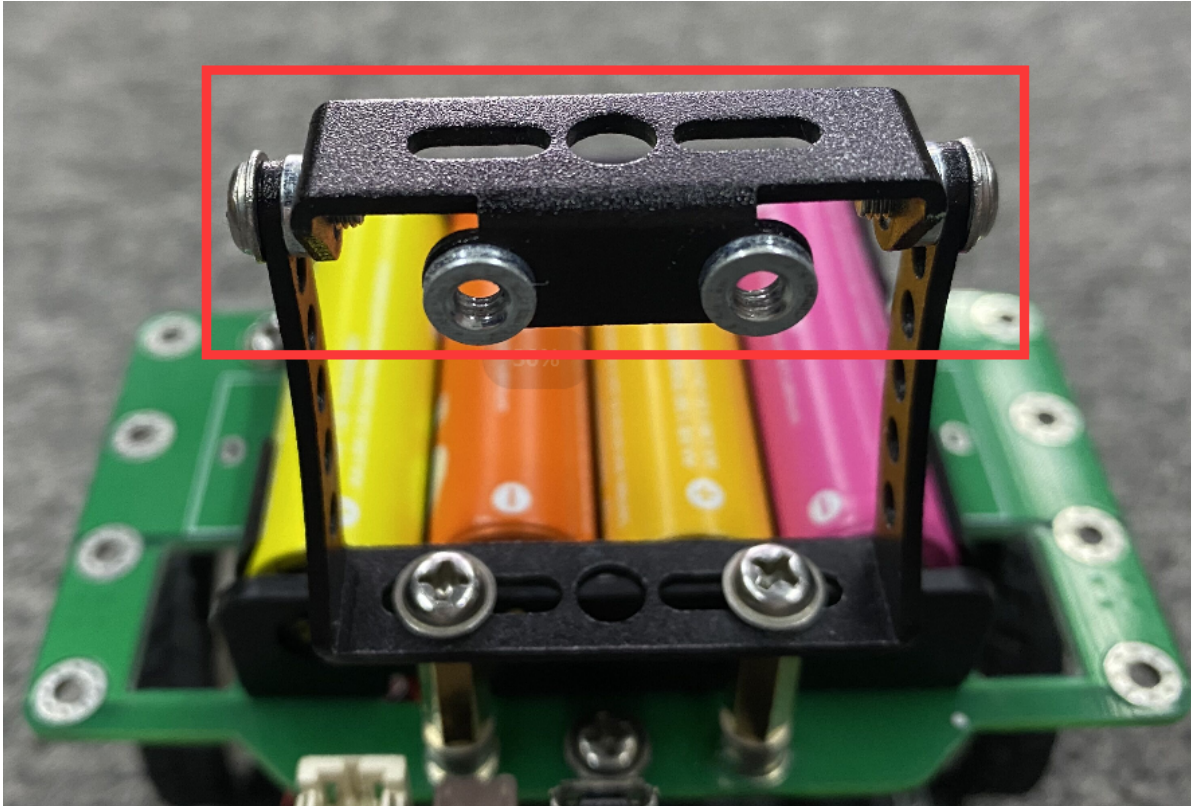


4. Install HuskyLens AI camera

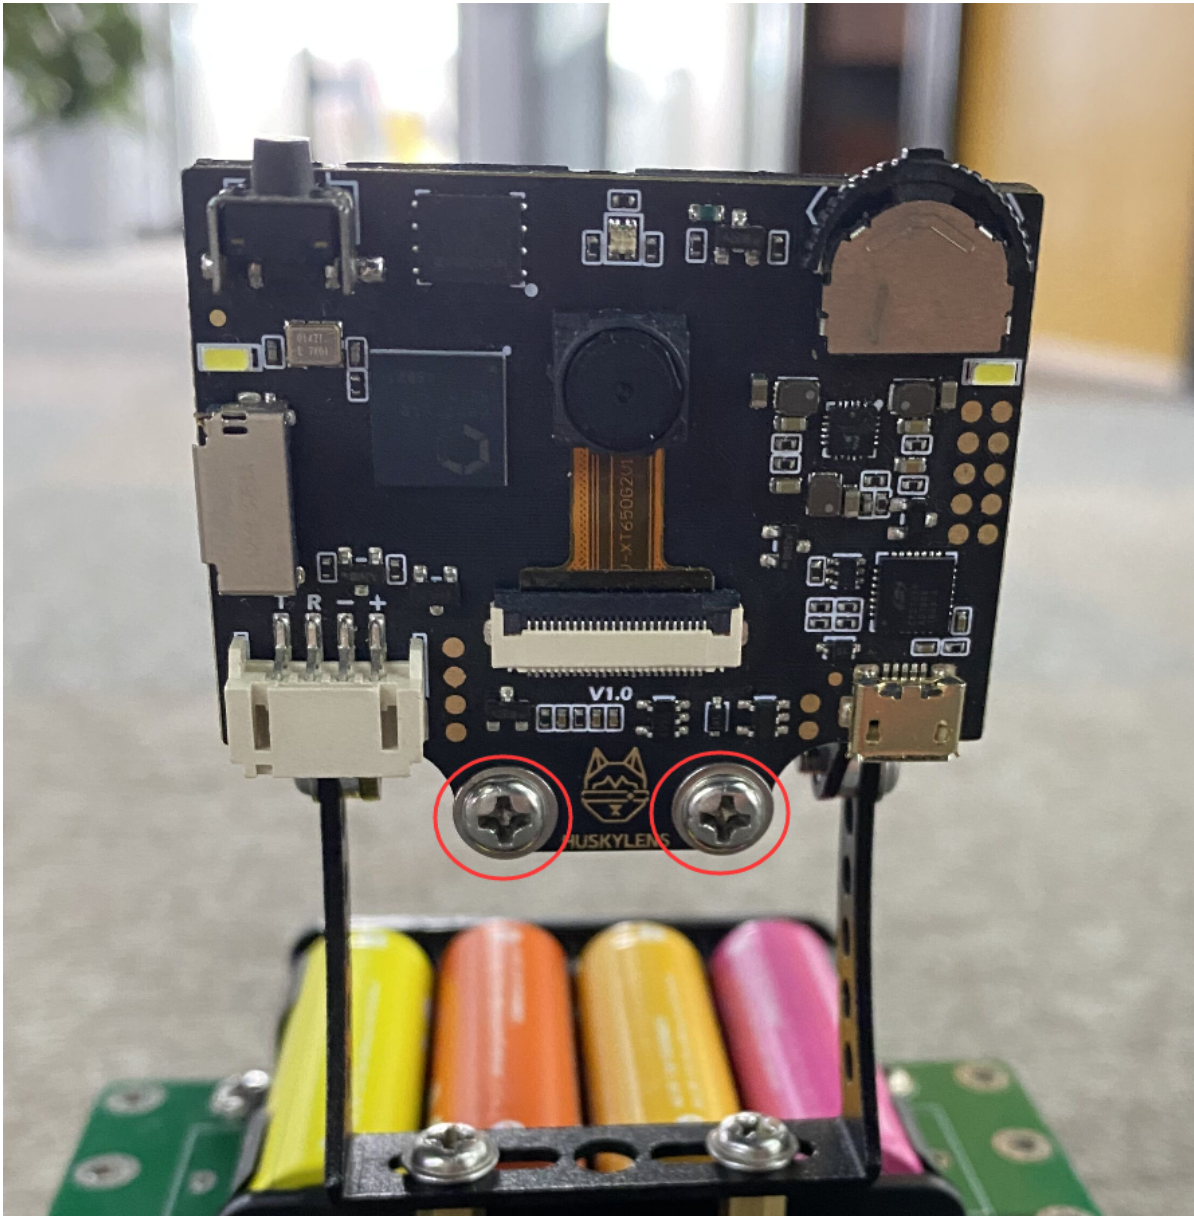

5. Plug in the AI camera connection

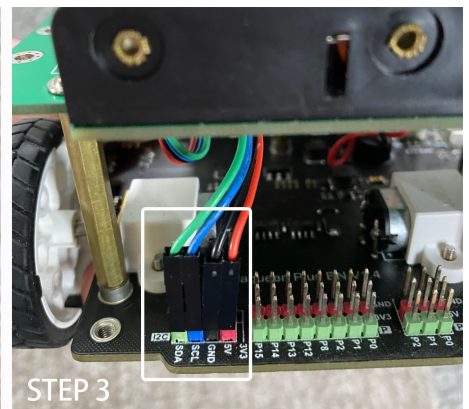
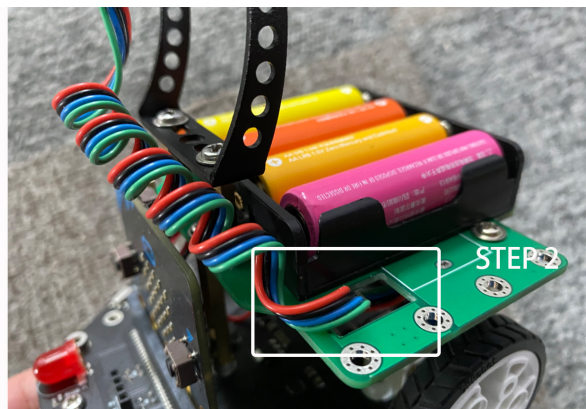
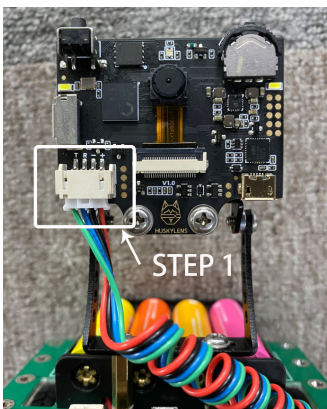


6. Installation done.

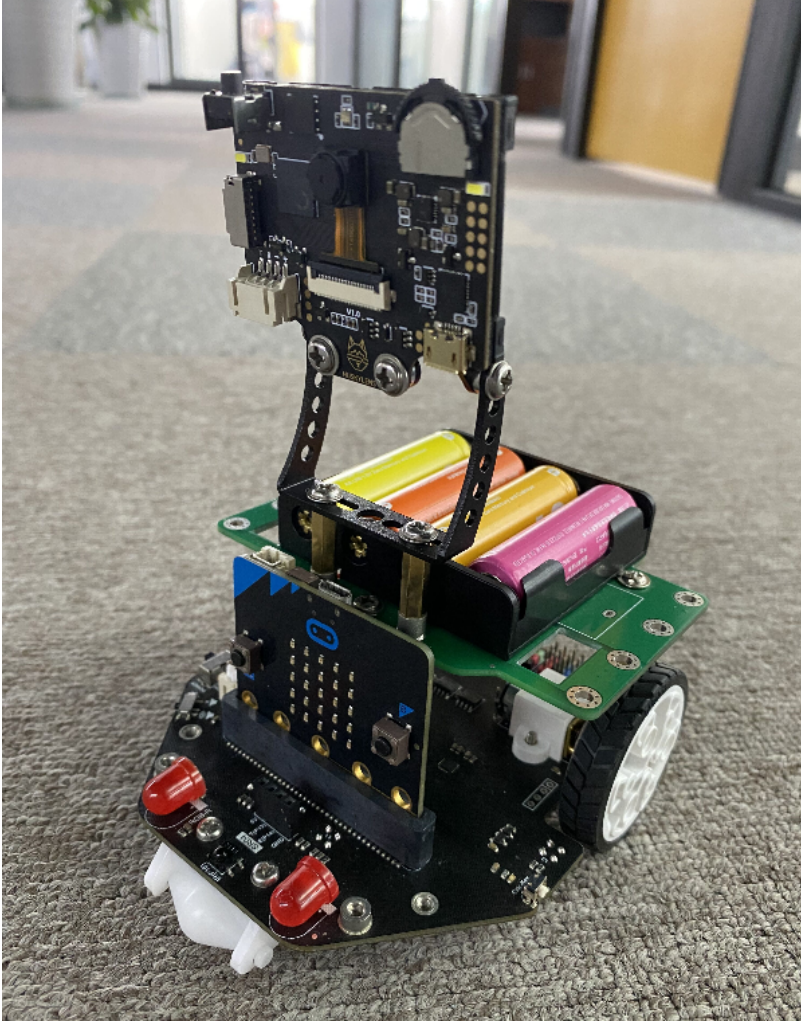


8. Install Maqueen Mechanic Kit for Maqueen V1.0 and V2.0

1. Install the delivered copper pillar at the position shown in the figure.
2. Install the assembled Maqueen Mechanic on the copper column with screws.
3. Plug the connecting wire of the servo into any 5V port of P0 or P1 or P2 on the back, and be careful not to plug it in the reverse direction.

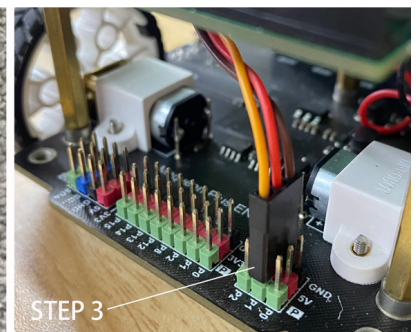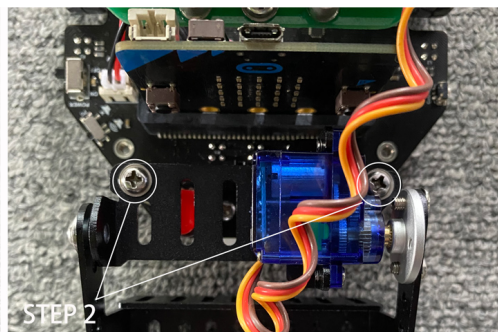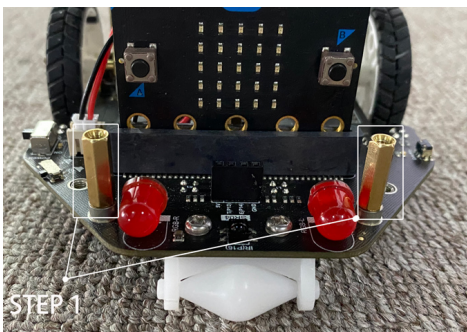

9.Product Configuration List for Maqueen V2.0

Image	List
	<ol style="list-style-type: none"> 1.Maqueen Plus V2 (AA battery) Vehicle body x 1 (Note: the motor, vehicle wheel, support wheel, and battery panel have been installed before delivery) 2.H-SR04 Ultrasonic Sensor x 1 3.Line-tracking Map x 1

More Documents

Documents for micro:Maqueen Plus V1

<p>Click to view online tutorial</p>	<p>https://edu.dfrobot.com/course-655.html (https://edu.dfrobot.com/course-655.html)</p>
<p>Click to download the tutorial</p>	<ol style="list-style-type: none"> 1. Maqueen Plus V1 Getting Started Tutorial-MakeCode-EN-V1.0 (https://dfimg.dfrobot.com/nobody/wiki/66f1eee56981e065131faba60a73a6f9.p) & Maqueen Plus V1 Getting Started Tutorial-Mind+-EN-V1.0 (https://dfimg.dfrobot.com/nobody/wiki/9452afa67059f576c85b345bd385a06) 2.Maqueen Plus V1 Advanced Tutorial-MakeCode-EN (https://dfimg.dfrobot.com/nobody/wiki/bd912488b7ef682c089df9dd1936f751) & Maqueen Plus V1 Advanced Tutorial-Mind+-EN (https://dfimg.dfrobot.com/nobody/wiki/4483a0f9f4bc6a2a5c7803b8429538d) 3.maqueen Plus V1 AI vision Getting Started Tutorial-Makecode-EN (https://dfimg.dfrobot.com/nobody/wiki/ca7e2d62510ec9b2e76b50200d39b5a) & maqueen Plus V1 AI vision Getting Started Tutorial-Mind+-EN (https://dfimg.dfrobot.com/nobody/wiki/4599d7c2468b40cd14e01df0b3ba1ac6) 4.Manual Maqueen Plus V1+ HaskyLens-mind+(Spanish) (https://dfimg.dfrobot.com/nobody/wiki/f27adefa5a09f88ec15ff796c3542e0c.p) maqueen plus V1 -makecode (Korean) (https://github.com/DFRobot/maqueen-p-V1-Tutorial)
<p>Product Pictures</p>	<p>MBT0021-EN V1 product pictures.rar (https://dfimg.dfrobot.com/nobody/wiki/0111afafd860e461458ea0ff30a43b24.r)</p>

Documents for micro:Maqueen Plus V2

Product Pictures: MBT0021-EN V2 product pictures.rar

(<https://dfimg.dfrobot.com/nobody/wiki/e05ce5e5f101d1519774d809a0bb615c.rar>)



Get **micro:Maqueen Plus V2** (<https://www.dfrobot.com/product-2027.html>) from DFRobot Store or **DFRobot Distributor**. (<https://www.dfrobot.com/distributor>)

FAQ

For any questions, advice or cool ideas to share, please visit the **DFRobot Forum** (<https://www.dfrobot.com/forum/>).

Turn to the Top