

EVERLIGHT ELECTRONICS CO,,LTD.

Device Number: DLE-026-315 REV: 1.0

3mm Round Small Flange Without stand-off LEDs, T-1


MODEL NO: 264-7SYGC/S530-E1 ECN: Page: 1/4

Features:

- High luminous power.
- Can be driven at low current.
- 2.54mm lead spacing.
- Available on tape and reel.

Descriptions:

- The series is specially designed for applications require higher brightness than that achievable with standard lamps.
- The LED lamps are available with different colors, intensities, epoxy colors, etc.

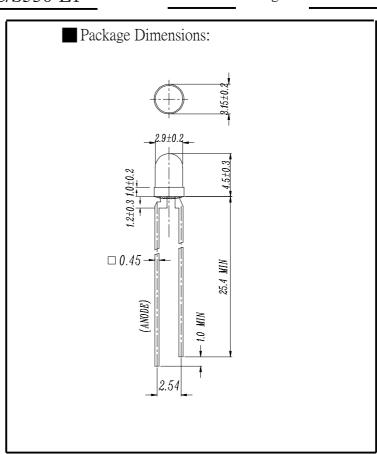

Applications:

TV Set

Monitor

TelephoneComputer

Notes:

1.All dimensions are in millimeters.

2. An epoxy meniscus may extend about

1.5mm(0.059") down to the lead.

PART NO	Chip		Chip		Lens Color
	Material	Emitted Color			
264-7SYGC/S530-E1	AlGaInP	Super Yellow Green	Water Clear		

B991732,990905

OFFICE: NO. 25, Lane 76, Sec. 3, Chung Yang Rd., Tucheng 236, Taipei, Taiwan, R.O.C.

TEL: 886-2-2267-2000,2267-9936

FAX: 886-2-2267-6244,22676189,22676306

http://www.everlight.com



EVERLIGHT ELECTRONICS CO.,LTD.

3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO: 264-7SYGC/S530-E1 ECN: 2/4 Page:

Absolute Maximum Ratings at $Ta = 25^{\circ}C$

Trosolute Waximum Raings at 1a – 25 C					
Parameter	Symbol	Rating	Unit		
Forward Current	If	25	mA		
Operating Temperature	Topr	-40 to +85	$^{\circ}\!\mathbb{C}$		
Storage Temperature	Tstg	-40 to +100	$^{\circ}\! \mathbb{C}$		
Soldering Temperature	Tsol	260 ± 5	$^{\circ}\! C$		
Electrostatic Discharge	ESD	2000	V		
Power Dissipation	Pd	60	mW		
Peak Forward Current(Duty 1/10 @ 1KHZ)	If(Peak)	160	mA		
Reverse Voltage	Vr	5	V		

Electronic Optical Characteristics:

Parameter	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Luminous intensity	Iv	 40	3.0 50		mcd	If=2mA If=20mA
Viewing Angle	2 θ 1/2		40		deg	If=20mA
Peak Wavelength	λp		575		nm	If=20mA
Dominant Wavelength	λd		573		nm	If=20mA
Spectrum Radiation Bandwidth	Δλ		20		nm	If=20mA
Forward Voltage	Vf		2.0	2.4	V	If=20mA
Reverse Current	Ir			10	μΑ	Vr=5V




EVERLIGHT ELECTRONICS CO.,LTD.


Device Number: DLE-026-315 REV: 1.0


3mm Round Small Flange Without stand-off LEDs, T-1


MODEL NO: 264-7SYGC/S530-E1 ECN: Page: 3/4


■ Typical Electro-Optical Characteristic Curves




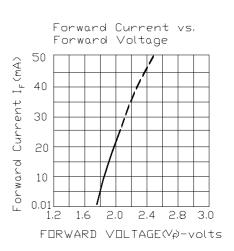



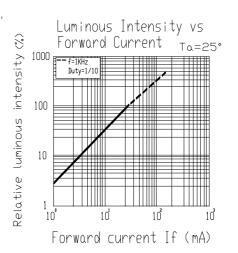







EVERLIGHT ELECTRONICS CO.,LTD.

Device Number:	DLE-026-315	REV:	1.0

3mm Round Small Flange Without stand-off LEDs, T-1

MODEL NO: 264-7SYGC/S530-E1 ECN: Page: 4/4

■ Reliability test items and conditions

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Soldering Heat	TEMP : 260°C ± 5 °C	5 SEC	76 Pcs	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLE	76 Pcs	0/1
3	Thermal Shock	$H: +100^{\circ}C$ 5min $\int 10 \sec L: -10^{\circ}C$ 5min	50 CYCLE	76 Pcs	0/1
4	High Temperature Storage	TEMP: 100°C	1000 HRS	76 Pcs	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 Pcs	0/1
6	DC Operating Life	If = 20 mA	1000 HRS	76 Pcs	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 Pcs	0/1