

SILIZED FUSE LINK 400 V
GR,SEMICOND.PROTECT.GR.D02 35 A



Figure similar

Model		
product brand name		SENTRON
Product designation		Semiconductor fuse
General technical data		
Size of fuse system / acc. to DIN EN 60269-1		D02
Operating class of the fuse link		gR (complete converter protection)
Dissipation		
Active power loss		
<ul style="list-style-type: none"> for rated value of the current / with AC / in hot operating state / per pole 	W	16.7
Main circuit		
Operating voltage / Rated value	V	400
Operating current / Rated value	A	35
Appearance		
Color coding of the fuse link		others
Certificates		
Equipment marking		
<ul style="list-style-type: none"> acc. to DIN EN 61346-2 		F
<ul style="list-style-type: none"> acc. to DIN EN 81346-2 		F



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SE1335>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SE1335/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5SE1335

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

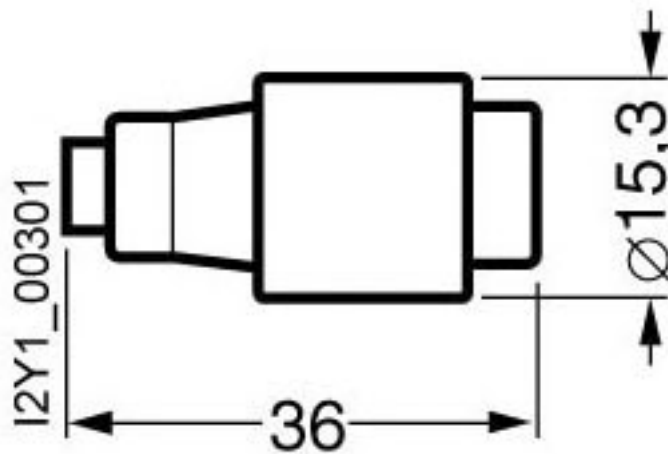

last modified:

11.03.2015