



Product Change Notification

From:	ept GmbH
PCN:	1852/2019
Date:	16.08.2019

Related Products:

One27 – Male connectors, straight

Article numbers:

Article number	Description
403-53012-51	One27 male straight 3.25mm 12p PL1
403-53016-51	One27 male straight 3.25mm 16p PL1
403-53020-51	One27 male straight 3.25mm 20p PL1
403-53026-51	One27 male straight 3.25mm 26p PL1
403-53032-51	One27 male straight 3.25mm 32p PL1
403-53040-51	One27 male straight 3.25mm 40p PL1
403-53050-51	One27 male straight 3.25mm 50p PL1
403-53068-51	One27 male straight 3.25mm 68p PL1
403-53080-51	One27 male straight 3.25mm 80p PL1
403-52012-51	One27 male straight 1.75mm 12p PL1
403-52016-51	One27 male straight 1.75mm 16p PL1
403-52020-51	One27 male straight 1.75mm 20p PL1
403-52026-51	One27 male straight 1.75mm 26p PL1
403-52032-51	One27 male straight 1.75mm 32p PL1
403-52040-51	One27 male straight 1.75mm 40p PL1
403-52050-51	One27 male straight 1.75mm 50p PL1
403-52068-51	One27 male straight 1.75mm 68p PL1
403-52080-51	One27 male straight 1.75mm 80p PL1

ept GmbH
Bergwerkstr. 50
86971 Peiting, Germany
Tel. +49 (0) 88 61/25 01-0
Fax +49 (0) 88 61/700
E-Mail: sales@ept.de
http://www.ept.de

Legal Form: GmbH
Registered Office: Peiting, Germany
Register Court:
AG Munich, HRB 151797
Managing Director:
Bernhard Guglhoer, Thomas Guglhoer

Bank details:
Sparkasse Allgäu
Bank code 733 500 00
Account No. 310 512 744
DE84 7335 0000 0310 5127 44
BIC BYLADEM1ALG

Deutsche Bank Augsburg
Bank code 720 700 01
Account No. 0 468 447
DE50 7207 0001 0046 8447 00
BIC DEUTDEM720

Kreissparkasse Schongau
Bank code 734 514 50
Account No. 100 909
DE79 7345 1450 0000 1009 09
BIC BYLADEM1SOG

Commerzbank Memmingen
Bank code 731 400 46
Account No. 730 3837
DE23 7314 0046 0730 3837 00
BIC COBADEFF


DG Bank Muenchen
Bank code 701 600 00
Account No. 151 095
DE89 7016 0000 0000 1510 95
BIC GENODEFF701

VAT ID No.DE 267 715 283
Tax No. 125/115/30065




Description of change: Change of pick & place pad, cut out in insulation body

Old version: One cap for all pin counts, length = 6,25 mm

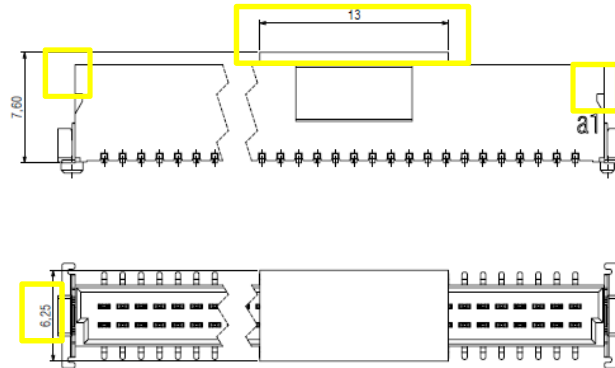

New version: two different caps for all pin counts, length = 5 mm

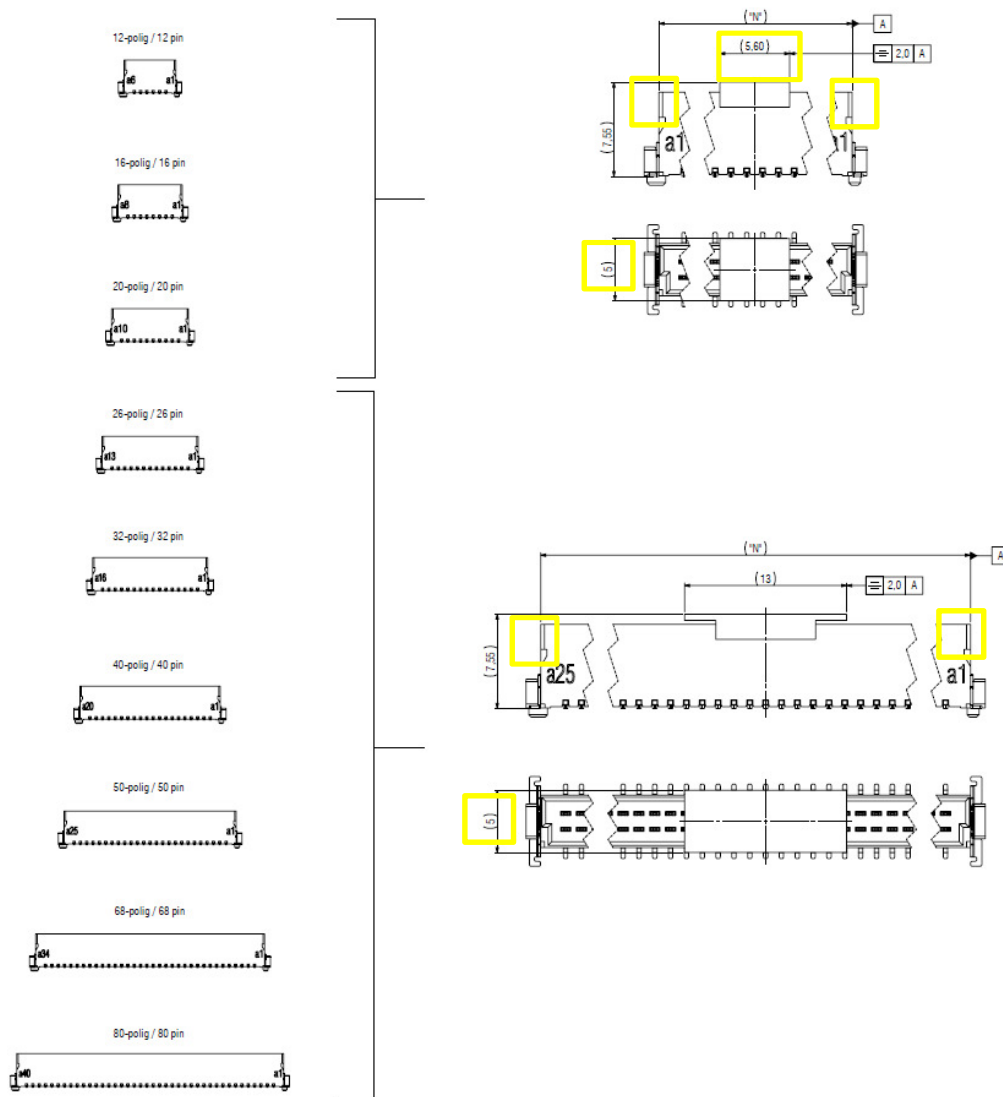

Reason for Changes:

Pick and place pad: Optimization automated optical inspection (AOI) for contacts & anti twist safe guard

Cut out in insulation body: prevents collision with right angled female connector

Effects on function:

/

Compatibility: 100% compatible to market standard

Effective:

01.06.2020