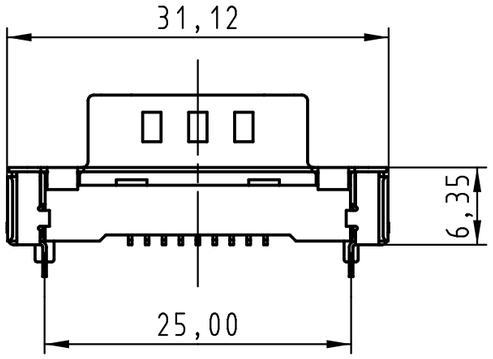

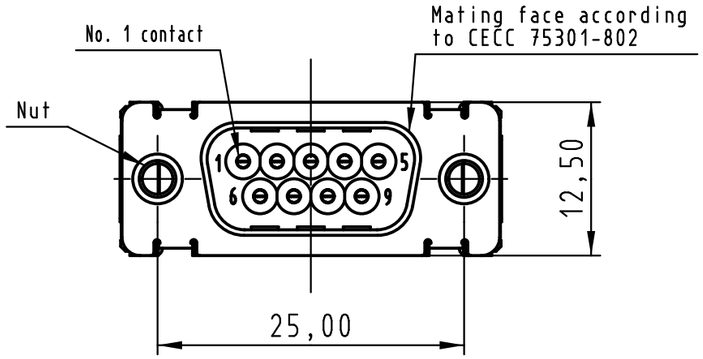

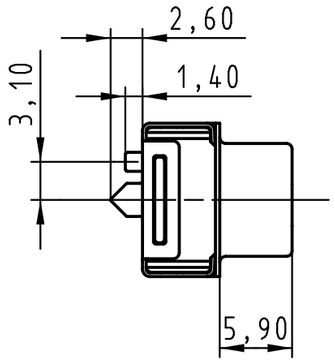

Load vacuum cover

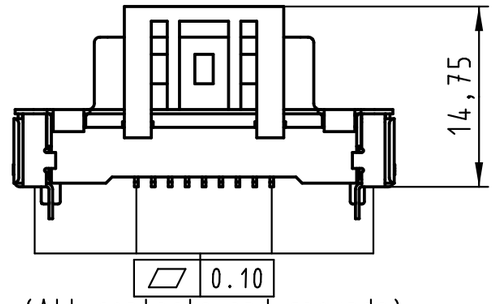

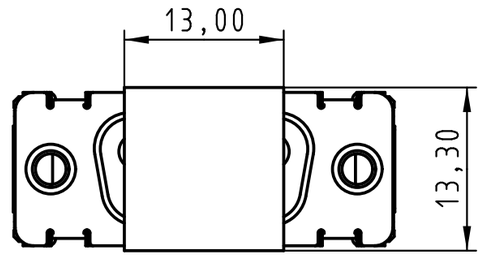

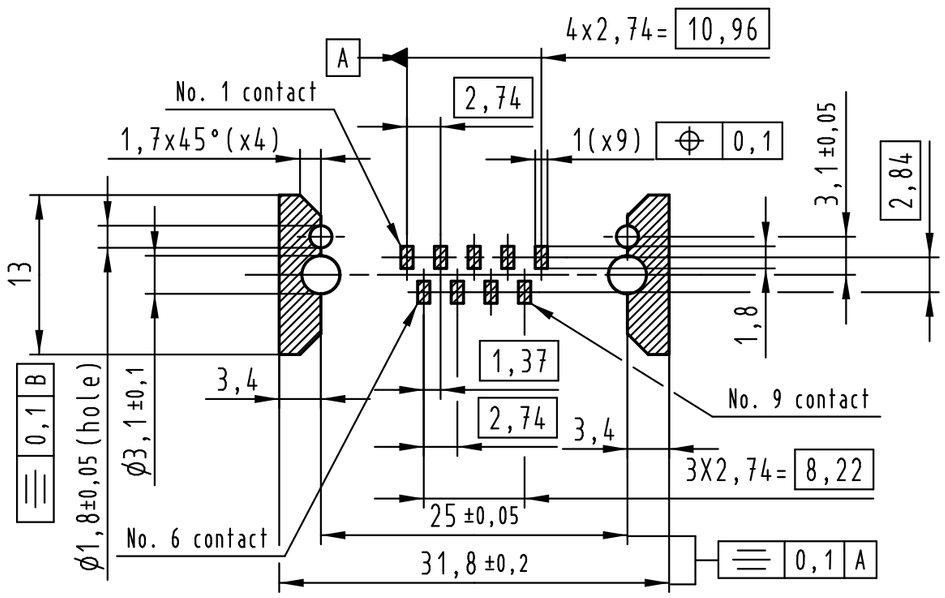

PCB layout, component side

Max. Temperature: 260° during 10 seconds.

Part number	PL	Nut	Index designation
0955 169 3811 741	1	M3	Black insulator
0955 169 3812 741	1	4-40 UNC	
0955 169 6811 741	2	M3	
0955 169 6812 741	2	4-40 UNC	
0955 169 7811 741	3	M3	
0955 169 7812 741	3	4-40 UNC	

Reel Packaging:
140 connectors
(See details on page2/2)

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

Free size tolerances

	Dat.	Name	Scale
Detail.	14-Sep-11	Johnson.S	2 : 1
Insp.	17-Nov-11	Steven.W	
Stand.	17-Nov-11	Steven.W	

Mod.	Dat.	Name
EC04070	17-Nov-11	Johnson.S

Zhuhai HARTING Limited

D-Sub SMT, 9 poles
Male, Straight
with nuts and ground pins

TB 09 55 169 x81x

Sub.

All rights reserved

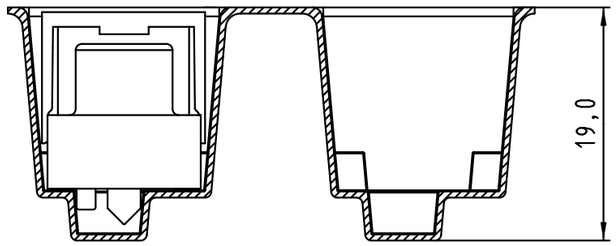

Detail A

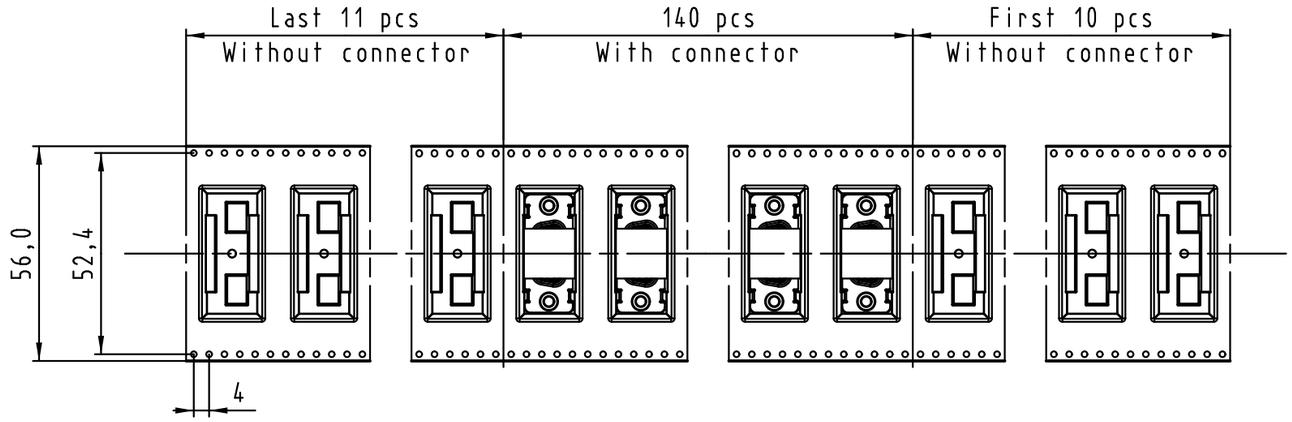

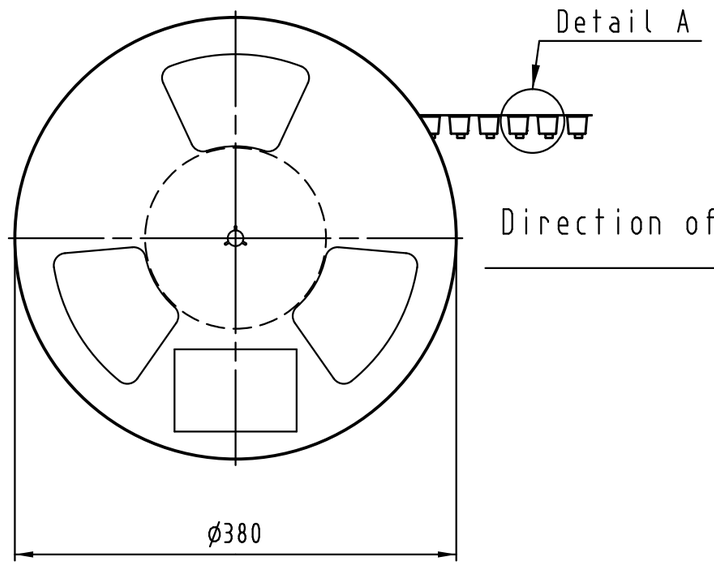

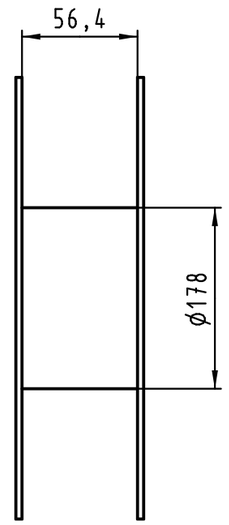

See TB 09 55 169 x81x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

Part number	PL	Nut	Index designation	
0955 169 3811 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 169 3812 741	1	4-40 UNC		
0955 169 6811 741	2	M3		
0955 169 6812 741	2	4-40 UNC		
0955 169 7811 741	3	M3		
0955 169 7812 741	3	4-40 UNC		

Mod.	Dat.	Name
EC04070	17-Nov-11	Johnson.S

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

Free size tolerances

	Dat.	Name	Scale
Detail.	14-Sep-11	Johnson.S	
Insp.	17-Nov-11	Steven.W	
Stand.	17-Nov-11	Steven.W	

Zhuhai HARTING Limited

D-Sub SMT, 9 poles
Male, Straight
with nuts and ground pins

TB 09 55 169 x81x

Sub.

All rights reserved