

GX14

12 to 750 Vdc/Vac

EPIC® Hermetic Sealed DC and AC Contactor - 350+ Amp Power Switching

RoHS Compliant, all date codes



Patent Pending



File E320908

All contact ratings and coil versions may not be UL recognized.

Contact GIGAVAC for a copy of the applicable sections of the test report.

| FEATURES |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Chassis level UL508 sized power terminals – No need for specially routed power cables, special bus bars, or special lugs. • Rugged EPIC® Seal rated to 175°C – Reduced risk of fire or meltdown in over current conditions. The same technology used for advanced aerospace programs. • Hermetically Sealed – Designed to meet: UL1604 for Class I & II, Div 2 and Class III for use in hazardous locations, IP67 for temporary water immersion for 30 min, SAE J1171 - external ignition protection, and ISO8846 for protection against ignition around flammable gasses. • High Efficiency Dual DC Coils – Very low 12 or 24 VDC continuous coil power with no EMI emissions or cross-talk on your system control power. Ideal for battery powered systems or where low power is needed. • Built-in coil suppression for all DC coils – Saves you engineering time and parts cost to add external coil suppression. • Stainless steel hardware and mounting inserts, for years of corrosion free service. • UL508 ambient compliant to 75°C but can operate continuously at 85°C with a higher terminal temperature rise of 60°C. Can also operate up to 125°C in special cases - contact GIGAVAC for details. • Not position sensitive – can be mounted in any position for ease of installation |

| UL COMPLIANT DC & AC ESTIMATED CONTACT POWER SWITCHING RATINGS | | | | | | |
|--------------------------------------------------------------------------------|---------------------------------------------------------|---------|---------|---------|--------|-------|
| Make & Break Resistive Current with 400 KCmil cable and 50° terminal temp rise | Contact Voltages & Life Cycle Ratings DC or 50/60 Hz AC | | | | | |
| | 24 V | 48 V | 72 V | 120 V | 350 V | 750 V |
| 350A - (75° C Ambient) 1/ | 112,500 | 75,000 | 37,500 | 15,000 | 3,000 | 750 |
| 225A - (75° C Ambient) 1/ | 150,000 | 100,000 | 50,000 | 20,000 | 4,000 | 1,000 |
| 150A - (75° C Ambient) 1/ | 180,000 | 120,000 | 60,000 | 24,000 | 4,800 | 1,200 |
| 125A - (75° C Ambient) 1/ | 225,000 | 150,000 | 75,000 | 30,000 | 6,000 | 1,500 |
| 100A - (75° C Ambient) 1/ | 300,000 | 200,000 | 100,000 | 40,000 | 8,000 | 2,000 |
| 75A - (75° C Ambient) 1/ | 435,000 | 290,000 | 145,000 | 58,000 | 11,600 | 2,900 |
| 50A - (75° C Ambient) 1/ | 750,000 | 500,000 | 250,000 | 100,000 | 20,000 | 5,000 |
| 30A - (75° C Ambient) 1/ | 900,000 | 600,000 | 300,000 | 120,000 | 24,000 | 6,000 |
| 20A - (75° C Ambient) 1/ | 1,000,000 | 700,000 | 350,000 | 140,000 | 28,000 | 7,000 |
| 400A - (50° C Ambient) 2/ | 90,000 | 60,000 | 30,000 | 12,000 | 2,400 | 600 |
| Max Break A, 2 cycles (75° C Ambient) 1/ | 2,500A | 2,300A | 2,100A | 1,900A | 1,700A | 990A |
| Max Make, 10 cycles (75° C Ambient) 1/ | 1,000A | 900A | 800A | 700A | 600A | 500A |

Electrical life rating is based on resistive load with 27µH maximum inductance in circuit. Because your application may be different, we suggest you test the contactor in your circuit to verify life is as required.

End of life is defined as when the dielectric, insulation resistance or contact resistance exceeds the specifications listed.

1/ Assumes UL508 ratings with 400 KCmil cables, UL508 max ambient temperature of 75°C as shown, and max. UL508 terminal temperature rise of 50°C.

At 85°C ambient, contactor can also meet all of its 75°C specifications but the terminal temperature can rise can be up to 60°C, which is higher than the 50°C rise allowed by UL508 and can be higher than some cable insulation ratings.

2/ Assumes UL508 ratings with 400 KCmil cables, at a lower 50°C UL508 ambient temperature, and max. UL508 terminal temperature rise of 50°C.

| UL COMPLIANT DC & AC CONTACT CURRENT CARRY RATINGS | | |
|-----------------------------------------------------------|------------|------------------|
| | | 75°C / 50°C |
| Cable size 1/ | KCmil | 400 |
| Continuous, UL508 Max 1/ | Amp | 350 / 400 |
| 10 seconds (1 time) | Amp | 525 / 710 |
| 100 Seconds (1 time) | Amp | 390 / 510 |
| 300 Seconds (1 time) | Amp | 350 / 400 |
| Starter Carry – Inrush 250 ms (10 repeats 1/ 2/) | Amp | NA / 2,000 |
| Starter Carry - Cranking 10 sec (10 repeats 1/ 2/) | Amp | NA / 500 |
| Maximum terminal Temp, Continuous | Deg C | 175 |
| Maximum terminal Temp, Intermittent | Deg C | 225 |

1/ Assumes UL508 ratings with 400 KCmil cables, ambient max. UL508 temperature of 75°C, and max. UL508 terminal temperature rise of 50°C. Contactor can also carry the higher currents shown on page 2 at 50°C ambient, and meet all of the UL508 requirements.

Contactors meet all of its published specifications at 85°C ambient, but terminal temperature can rise 60°C, which is higher than the 50°C allowed by UL508.

The maximum terminal temperature rating is 175°C, which means much higher currents than shown on page 2 can be carried and switched. However, this temperature is much higher than most cable insulation ratings, which mean busbars must be used. Contact GIGAVAC for assistance for higher current applications.

2/ Rating consists of combined inrush + cranking current at the times specified, with 2 seconds off between cycles. This is higher current than is required for UL1107 for marine battery switches.

| COIL RATINGS | | | |
|----------------------------------------------------|-------|-------|-------|
| Coil Voltage (Nominal) | 12Vdc | 24Vdc | 48Vdc |
| Coil P/N Designation | B | C | F |
| Coil Voltage (Max) 1/ | 15 | 30 | 60 |
| In-Rush Current Max (75 ms) – Amps 2/ 3/ | 4.0 | 1.7 | 0.9 |
| Hold Current after in-rush (Avg.) - Amps 3/ | 0.30 | 0.12 | 0.06 |
| Hold Power after in-rush (Avg.) – Watts 3/ | 3.6 | 3.0 | 2.9 |
| Pick-up, Volts, Max 2/ 4/ 5/ | 7.5 | 15.0 | 40 |
| Hold, Volts, Min 5/ | 5.0 | 10.0 | 22 |
| Drop-Out, Volts, Min 5/ | 0.5 | 2.0 | 2 |
| Coil Back EMF (volts) 6/ | 45 | 45 | 110 |

Ratings are at 25°C. For specific values at other temperatures, please [contact GIGAVAC](#).

1/ Because the contactor is operated by a coil that changes resistance with temperature, the maximum coil voltage will be lower than indicated at temperatures above 25C, and higher than indicated at temperatures below 25C.

2/ Contactor has two coils. Both are used for pull-in, and then in approximately 75 milliseconds, one coil is electronically removed from the coil drive circuit. The remaining coil supplies low continuous hold power sufficient for the contactor to meet all of its specified performance specifications. This provides the lowest coil power possible without the use of PWM electronics that have been known to cause EMI emissions and/or cross-talk on your system control power.

3/ Because the contactor is operated by a coil that changes resistance with temperature, and because Nominal Coil voltage has been assumed for the In-Rush, Hold Current and Hold Power specifications, Current/Wattage will be lower than indicated at temperatures above 25C and higher than indicated at temperatures below 25C.

4/ For Pick-up testing of contactors with dual coils, the voltage can not be ramped up slowly, but must be applied instantly to at least the maximum pull-in voltage or current. Otherwise, the contactor will not pick-up.

5/ Because the contactor is operated by a coil that changes resistance with temperature, Pick-up Voltage, Hold Voltage, and Drop Out Voltage will be lower than indicated at temperatures below 25C and higher than indicated at temperatures above 25C.


6/ These DC coils have built-in coil suppression. The use of additional external coil suppression can slow the release time and invalidate the life cycle ratings, or can cause the contactor not to be able to interrupt the maximum current specified. If lower coil back EMF is required, please [contact GIGAVAC](#) for assistance.

| PRODUCT SPECIFICATIONS | | |
|--------------------------------------------------------|----------|----------------------|
| Specifications | Units | Specifications |
| Contact Arrangement (main) | Form X | SPST-NO |
| Contact Arrangement (Auxiliary) 1/ | Form A | SPST-NO |
| Mechanical Life | cycles | 1 million |
| Contact Resistance | | |
| Max @ rated carry current | mohms | .4 |
| Typical @ rated carry current | mohms | .15 to .3 |
| Operate time, 25°C | | |
| Close (includes bounce) Max | ms | 20 |
| Close (includes bounce) Typical | ms | 13 |
| Bounce on close, Max | ms | 7 |
| Release time (includes arc time at max. break current) | ms | 12 |
| Insulation Resistance | Mohms | 100 2/ |
| Dielectric at sea level (leakage < 1mA) | VRMS | 2,500 |
| Shock | G's peak | 20 |
| Vibration, Sinusoidal (500-2000 Hz peak) | G's | 15 |
| Operating ambient Temp Range | °C | -55 to +85 3/ |
| Storage ambient Temp Range | °C | -70 to +175 |
| Weight, Typical | Kg (Lb) | 0.50/(1.1) |

1/ Auxillary contact rating - 2A, 24Vdc Resistive load, 100,000 cycles. Minimum current is 1mA, 5V. The auxiliary contact is mechanically linked to the main power contacts.

2/ 50 Mohms after life.

3/ Contactor can operate up to 125°C in special cases - contact GIGAVAC for details.

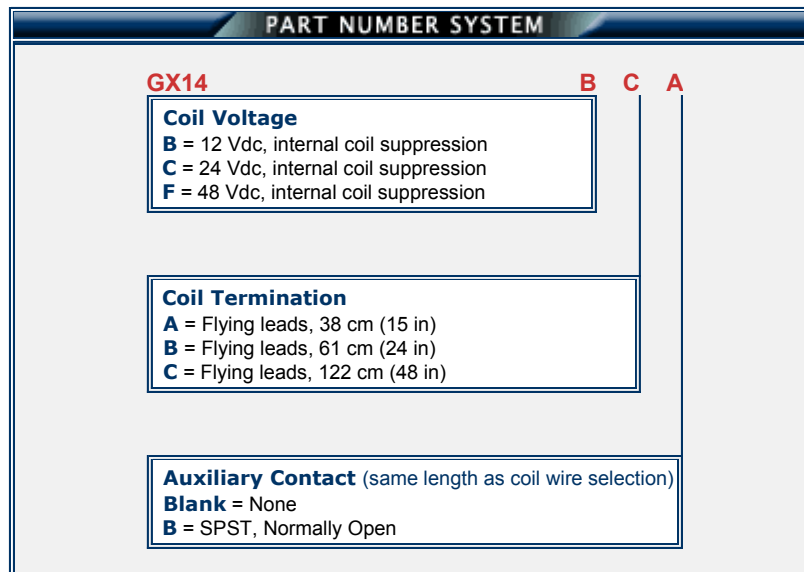


MOUNTING

M5 or NO.10 SCREWS

TORQUE 1.7-4Nm [15-35in-lb]

CASE MATERIAL


40-50% GF Nylon 6/6
UL94 V-0

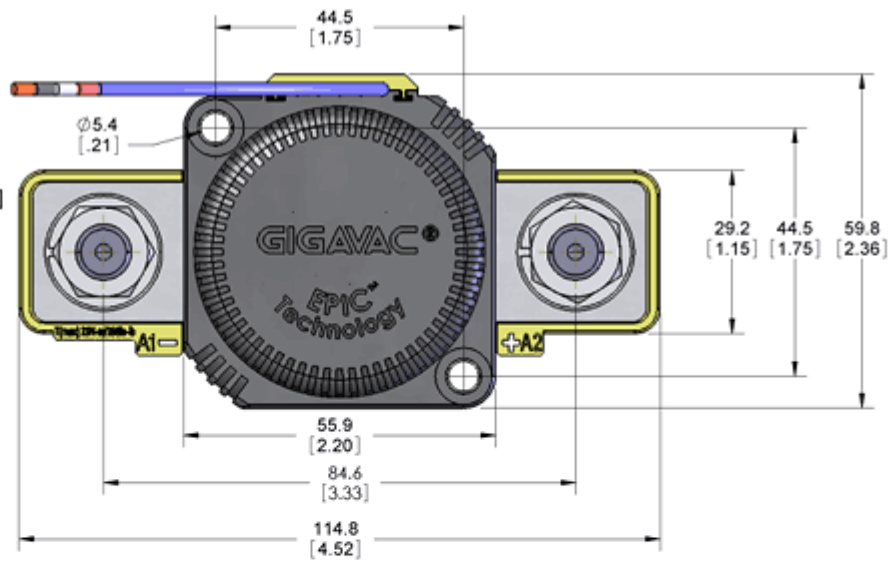

POWER CONNECTION

HARDWARE INCLUDED:
STAINLESS M10X1.5 BOLT
STAINLESS M10X1.5 NUT
STAINLESS LOCK WASHER
STAINLESS FLAT WASHER

TORQUE 11-23Nm [100-200 in-lb]

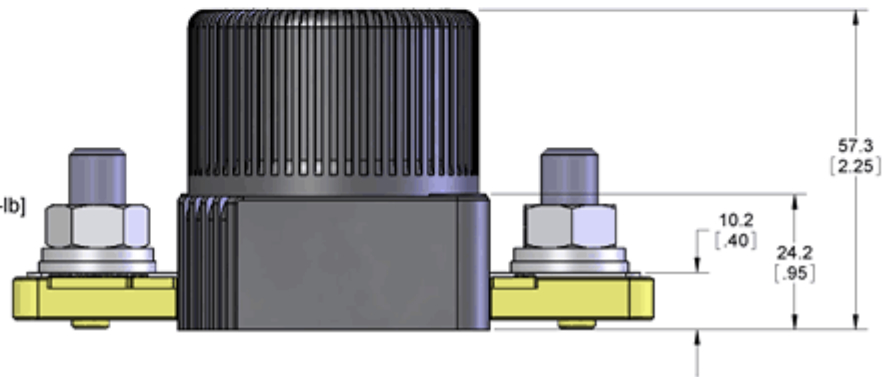


DC COIL SUPPRESSION



A/C COIL




AUXILIARY OPTION

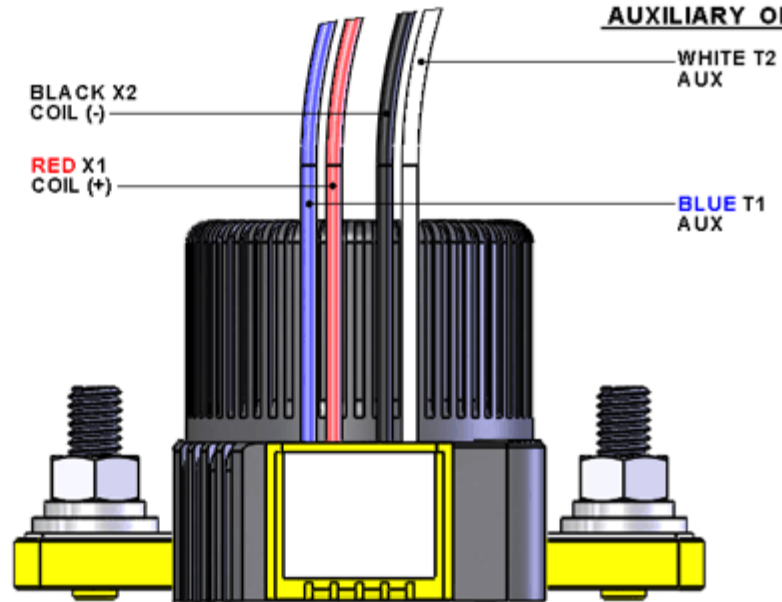


WIRE SPEC: SILICONE, 20AWG, -40C-150C, UL: VW-1

Power contacts

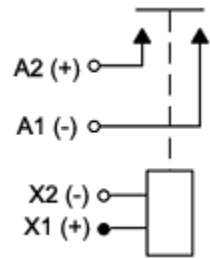

Auxiliary contacts (optional)



Application Information:

1. **WARNING** - When using more than one lug on a power terminal, make sure the primary power is closest to the contactor busbar, with the lower current lug on top, then the washer, then the lock washer, then the nut. **Improper order can cause severe over-heating resulting in the possible melting of the connecting cable insulation.**

2. EPIC[®] sealing technology

3. Relay Schematics and Forms

06/24/11



GIGAVAC[®] - P.O. Box 4428 - Santa Barbara, CA 93140-4428 - ph +(805) 684-8401 - +(805) 755-2000
fx +(805) 684-8402 - info@gigavac.com - www.gigavac.com - ©Copyright 2003-2011 GIGAVAC, LLC.