TECHNICAL DATA

D-SUBMINIATURE CONNECTORS

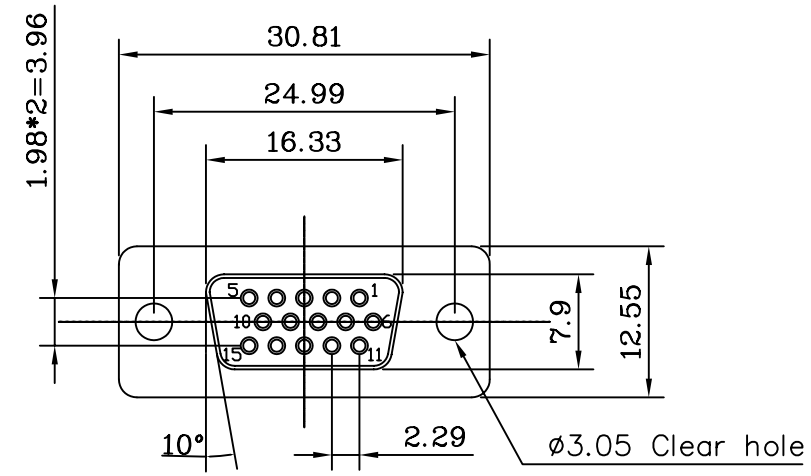

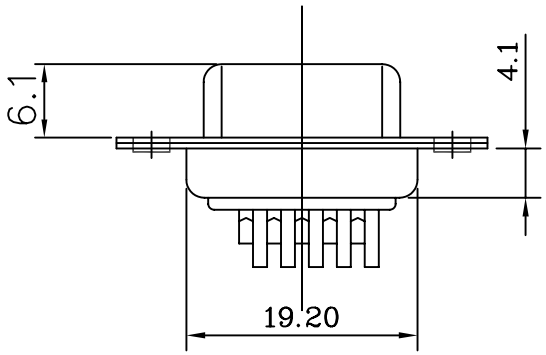

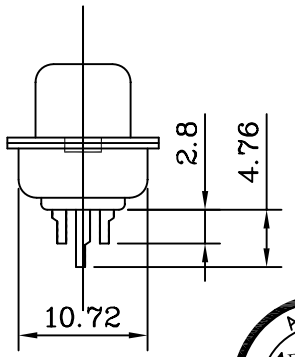

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT,UL94V-0 rated

Contact : Copper alloy

Shell : SPCC

Electrical

Contact Resistance : 20 milliohms Max at 1 AMP DC.

Insulation Resistance : 1000 magohms at 500 VDC

Dielectric Withstanding Voltage : 1000 VAC/rms 60Hz for 1 minute

Current Rating : 1 AMP

Volatge Rating : 250 VAC/rms 60Hz

PRODUCT CODE

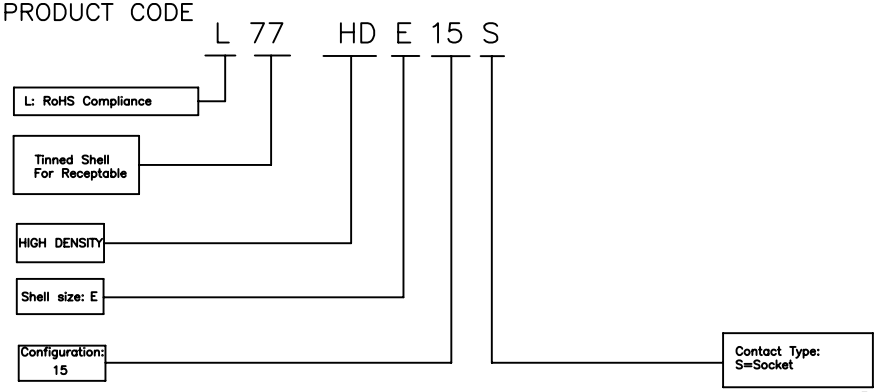

Amphenol	TOL. GEN. : +/-0.30								
	VOLUME:								
	AREA:								
	PLATING:								
SERIES	TREATMENT:								
NUMBER SERIES Solder Cup Series	MATERIAL:			origin drawing	Roger	10/18'06	Lik	A	
	FILE:	CUSTOMER		MODIFICATIONS	DRAW	DATE	APPROVE	IND.	
DATE 2006.10.18	DESIGNATION Solder Cup Type HD 15 Socket D-SUB CONNECOTR	INTERNAL PART NUMBER L77HDE15S							