



**DC COMPONENTS CO., LTD.**

RECTIFIER SPECIALISTS

**GBU4A  
THRU  
GBU4M**

**TECHNICAL SPECIFICATIONS OF SINGLE-PHASE GLASS PASSIVATED BRIDGE RECTIFIER**

**VOLTAGE RANGE - 50 to 1000 Volts**

**CURRENT - 4.0 Amperes**

**FEATURES**


- \* Ideal for printed circuit board
- \* Surge overload rating: 150 Amperes peak
- \* Glass passivated junction

**MECHANICAL DATA**


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Terminals: MIL-STD-202E, Method 208 guaranteed
- \* Polarity: Symbols molded or marked on body
- \* Mounting position: Any

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.



**GBU**

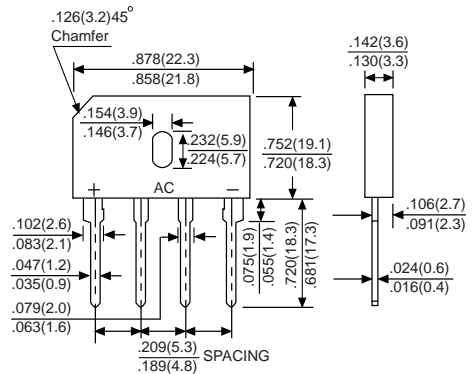

Dimensions in inches and (millimeters)

	SYMBOL	GBU4A	GBU4B	GBU4D	GBU4G	GBU4J	GBU4K	GBU4M	UNITS	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts	
Maximum RMS Bridge Input Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts	
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts	
Maximum Average Forward Rectified Current @T <sub>c</sub> =100°C	I <sub>(AV)</sub>								4.0 2.4	Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>								140	Amps
Maximum Forward Voltage Drop per element at 4.0A DC	V <sub>F</sub>								1.1	Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	@T <sub>J</sub> = 25°C								10	μAmps
	@T <sub>J</sub> = 125°C								500	
I <sup>2</sup> t Rating for Fusing (t<8.3ms)	I <sup>2</sup> t								93	A <sup>2</sup> Sec
Typical Junction Capacitance ( Note1)	C <sub>J</sub>								45	pF
Typical Thermal Resistance (Note 2)	R <sub>θJC</sub>								2.2	°C/W
Operating Temperature Range	T <sub>J</sub>								-55 to +150	°C
Storage Temperature Range	T <sub>STG</sub>								-55 to +150	°C

NOTES : 1. Measured at 1 MHz and applied reverse voltage of 4.0 volts.

2. Thermal Resistance from Junction to Case per element Unit mounted on 50x50x1.6mm Cu plate heat-sink.

# RATING AND CHARACTERISTIC CURVES (GBU4A THRU GBU4M)

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

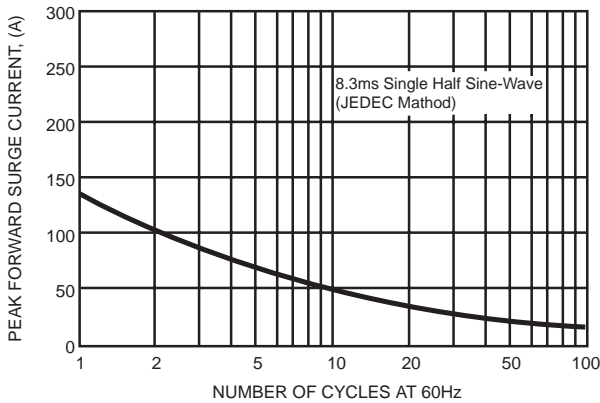


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

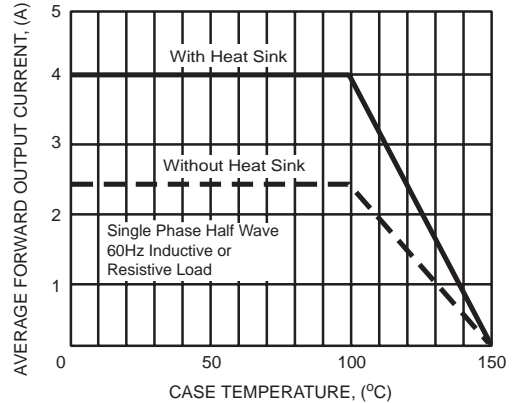


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

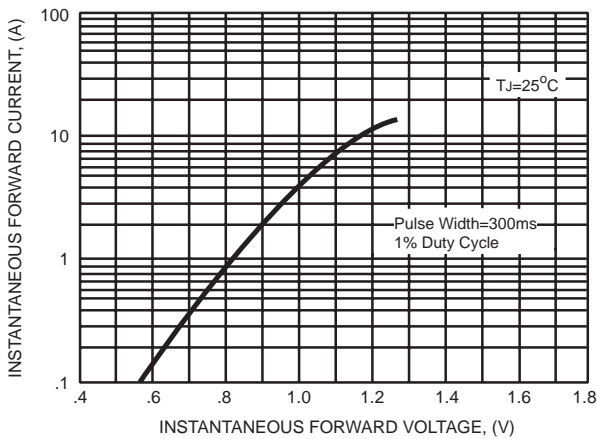


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS


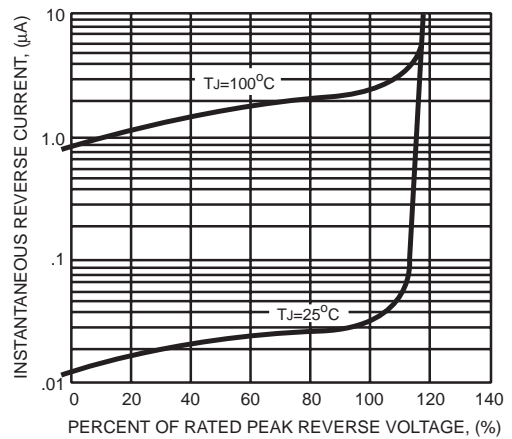


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

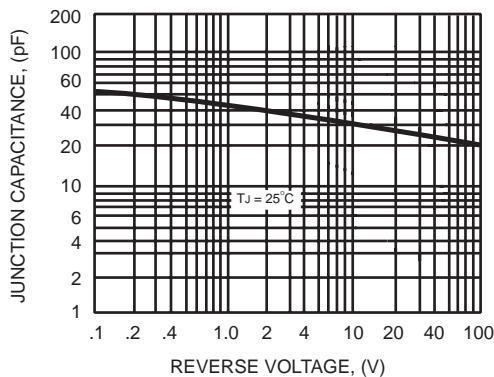

DC COMPONENTS CO., LTD.