


6491B / H07Z-R / BS EN 50525-3-41 Cable

multicomp PRO

**RoHS
Compliant**

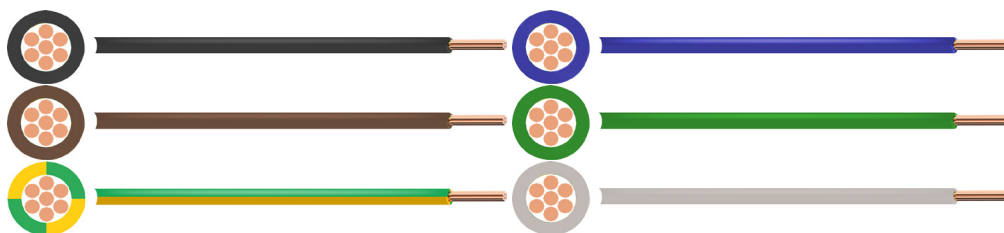

Application:

Suitable for use in conduit and for fixed, protected installation. For installations where fire, smoke emission and toxic fume create a potential risk to life and equipment.

Cable Standards:

BS EN 50525-3-41 (previously BS 7211), BASEC approved

Construction:

Conductor : Class 2 stranded copper conductor according to BS EN 60228 (previously BS 6360)
Insulation : LSZH (Low Smoke Zero Halogen) Type EI5 according to BS EN 50363

Characteristics:

Voltage Rating (Uo/U) : 450/750V
Temperature Rating : Fixed: 0°C to +90°C
Min. Bending Radius : Up to 10mm²: 4 × overall diameter
Insulation Colour : Blue, Brown, Green/Yellow, Grey & Black
Sheath Colour : White & Black

These product range are available on reels of 100m or per metre

Electrical Characteristics

Current Carrying Capacity and Mass Supportable

Nominal Cross Sectional Area mm ²	Reference Method A (Enclosed in Conduit in Thermally Insulating Wall etc.)		Reference Method B (Enclosed in Conduit on a Wall Or in Trunking etc.)		Reference Method C (Clipped Direct)	
	2 Cables Single-Phase AC or DC Amps	3 or 4 Cables Three-Phase AC Amps	2 Cables Single-Phase AC or DC Amps	3 or 4 Cables Three-Phase AC Amps	2 Cables Single-Phase AC or DC Amps	3 or 4 Cables Three-Phase AC Amps
1.5	19	17	23	20	25	23
2.5	26	23	31	28	34	31
4	35	31	42	37	46	41

Ambient temperature: 30°C

Conductor operating temperature: 90°C

The above table is in accordance with Table 4E1A from the 17th Edition of IEE Wiring Regulations.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

6491B / H07Z-R / BS EN 50525-3-41 Cable

multicomp PRO

Voltage Drop

Nominal Cross Sectional Area mm ²	2 Cables DC mV/A/m	2 Cables Single-Phase AC mV/A/m			3 OR 4 Cables Three-Phase AC mV/A/m			
		Reference Methods A and B (enclosed in conduit or trunking)	Reference Methods C, F and G (clipped direct, on tray or in free air)		Reference Methods A and B (enclosed in conduit or trunking)	Reference Methods C, F and G (clipped direct, on tray or in free air)		
			Cables Touching	Cables Spaced*		Cables Touching, Trefoil	Cables Touching, Flat	Cables Spaced*, Flat
1.5	31	31	31	31	27	27	27	27
2.5	19	19	19	19	16	16	16	16
4	12	12	12	12	10	10	10	10

Conductor operating temperature: 90°C

*Spacings larger than those specified in Method 12 (see table 4A of the 17th Edition of IEE Wiring Regulations) will result in larger volt drop.

The above table is in accordance with Table 4E1B from the 17th Edition of IEE Wiring Regulations.

Conductors

Class 2 Stranded Conductors for Single Core and Multi-Core Cables

Nominal Cross Sectional Area mm ²	Min. No. of Wires in Conductor						Max. Resistance of Conductor at 20°C
	Circular		Circular Compacted		Shaped		Annealed Copper Conductor
	Cu	Al	Cu	Al	Cu	Al	Plain Wires Ω/km
1.5	7	-	6	-	-	-	12.1
2.5	7	-	6	-	-	-	7.41
4	7	-	6	-	-	-	4.61

The above table is in accordance with BS EN 60228 (previously BS 6360)

De-Rating Factors

For Ambient Air Temperatures other than 30°C

Air Temperature	30°C	35°C	40°C	45°C	50°C	55°C	60°C	65°C	70°C
De-Rating Factor	1	0.96	0.91	0.87	0.82	0.76	0.71	0.65	0.58

The above table is in accordance with Table 4B1 of the 17th Edition of IEE Wiring Regulations.

Dimensions

Part Number	Nominal Cross Sectional Area mm ²	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP-6491B-1.50MMBLK	1.5	0.7	3.4	22
PP-6491B-1.50MMBLU				
PP-6491B-1.50MMBRN				

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO

6491B / H07Z-R / BS EN 50525-3-41 Cable

multicomp PRO

Part Number	Nominal Cross Sectional Area mm ²	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP-6491B-1.50MMG/Y	1.5	0.7	3.4	22
PP-6491B-1.50MMGRY				
PP-6491B-2.50MMBLK	2.5	0.8	4.1	35
PP-6491B-2.50MMBLU				
PP-6491B-2.50MMBRN				
PP-6491B-2.50MMG/Y				
PP-6491B-2.50MMGRY				
PP-6491B-4.0MMBLK	4	0.8	4.7	50
PP-6491B-4.0MMBLU				
PP-6491B-4.0MMBRN				
PP-6491B-4.0MMG/Y				
PP-6491B-4.0MMGRY				

Part Number Table

Description	Reel Length (m)	Part Number
6491B / H07Z-R / BS EN 50525-3-41 Cable, 1.5mm ² , Black	100m or per metre	PP-6491B-1.50MMBLK
6491B / H07Z-R / BS EN 50525-3-41 Cable, 1.5mm ² , Blue		PP-6491B-1.50MMBLU
6491B / H07Z-R / BS EN 50525-3-41 Cable, 1.5mm ² , Brown		PP-6491B-1.50MMBRN
6491B / H07Z-R / BS EN 50525-3-41 Cable, 1.5mm ² , Green/Yellow		PP-6491B-1.50MMG/Y
6491B / H07Z-R / BS EN 50525-3-41 Cable, 1.5mm ² , Grey		PP-6491B-1.50MMGRY
6491B / H07Z-R / BS EN 50525-3-41 Cable, 2.5mm ² , Black		PP-6491B-2.50MMBLK
6491B / H07Z-R / BS EN 50525-3-41 Cable, 2.5mm ² , Blue		PP-6491B-2.50MMBLU
6491B / H07Z-R / BS EN 50525-3-41 Cable, 2.5mm ² , Brown		PP-6491B-2.50MMBRN
6491B / H07Z-R / BS EN 50525-3-41 Cable, 2.5mm ² , Green/Yellow		PP-6491B-2.50MMG/Y
6491B / H07Z-R / BS EN 50525-3-41 Cable, 2.5mm ² , Grey		PP-6491B-2.50MMGRY
6491B / H07Z-R / BS EN 50525-3-41 Cable, 4mm ² , Black		PP-6491B-4.0MMBLK
6491B / H07Z-R / BS EN 50525-3-41 Cable, 4mm ² , Blue		PP-6491B-4.0MMBLU
6491B / H07Z-R / BS EN 50525-3-41 Cable, 4mm ² , Brown		PP-6491B-4.0MMBRN
6491B / H07Z-R / BS EN 50525-3-41 Cable, 4mm ² , Green/Yellow		PP-6491B-4.0MMG/Y
6491B / H07Z-R / BS EN 50525-3-41 Cable, 4mm ² , Grey		PP-6491B-4.0MMGRY

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

multicomp PRO