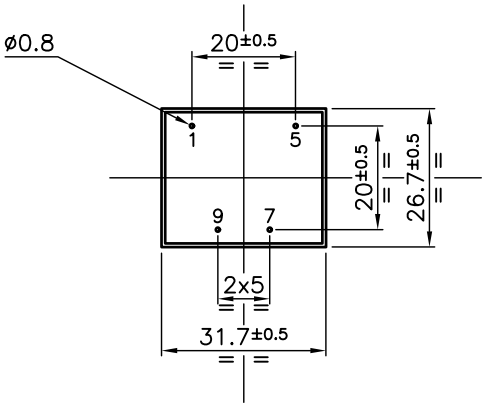



SAFETY ISOLATING TRANSFORMER

POWER : 2VA
INPUT VOLTAGE : 230V
FREQUENCY : 50/60Hz
NOMINAL OUTPUT VOLTAGE : 18V

INHERENTLY SHORT CIRCUIT PROOF TRANSFORMER
IP00
UL94V0
OPERATING TEMPERATURE : −25°C to 70°C
STORAGE TEMPERATURE : −25°C to 85°C
INSULATION CLASS (IEC85) : B
INHERENT PROTECTION

STANDARDS :
UL506 (File E111078)
CSA 22−2 (File E111078)
UL1585 (File E240724)
VDE (File Ref:1398300)
EN60950 (File Ref:1398300)
EN61558−1 (File Ref:1398300)
EN61558−2−6 (File Ref:1398300)
CE









N°28

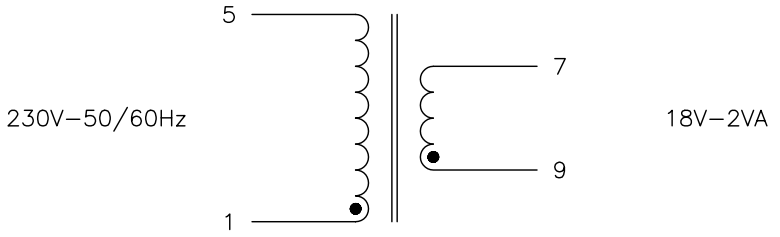

Finition:			Tolérance générale:	
Finition:			General tolerance:	
Ech: 1:1	Matière:			
	Material:			
Dessiné par:	ROUSSEL.Ch	Date: 27/05/2004	Visa:	J.P.M.

Rev	Date	Modification	Dessiné	Visa
D				
C				
B				
A				

DATA SHEET 44125
EI 30x15.5

myrra
22 Allée du Clos des Charmes
Z.A. Les Portes de la Forêt
77090 COLLEGIEN
Tel : 01−60−37−55−55
Fax : 01−60−17−12−00

DS44125