


PS4607



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 1BAR 30M FEP CABLE

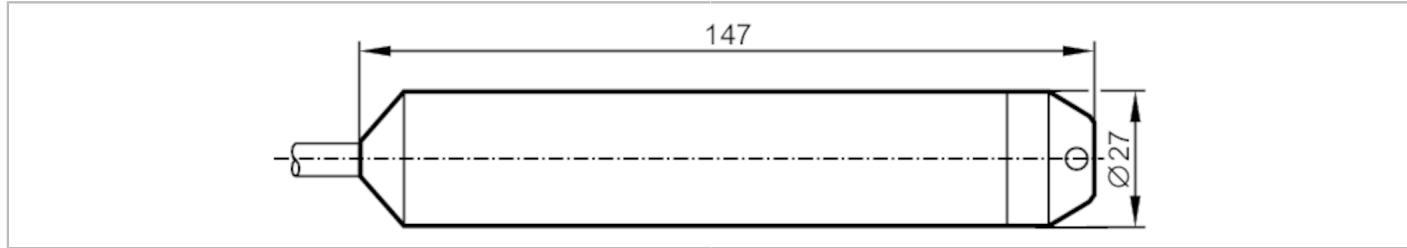

CE

Product characteristics

Output signal	analogue signal			
Measuring range	0...1 bar	0...1000 mbar	0...14.5 psi	0...100 kPa

Application

Design	with capillary tube for pressure compensation			
Application	for industrial applications			
Media	Liquids			
Medium temperature [°C]	-10...85			
Pressure rating	5 bar	72.5 psi	500 kPa	
Min. bursting pressure	6 bar	87 psi	600 kPa	
Type of pressure	relative pressure			

Electrical data

Operating voltage [V]	10...30 DC			
Protection class	III			
Reverse polarity protection	yes			

Inputs / outputs

Number of inputs and outputs	Number of analogue outputs: 1			
------------------------------	-------------------------------	--	--	--

Outputs

Total number of outputs	1			
Output signal	analogue signal			
Number of analogue outputs	1			
Analogue current output [mA]	4...20			
Max. load [Ω]	700; ($U_b = 24 \text{ V}; (U_b - 10 \text{ V}) / 20 \text{ mA}$)			
Short-circuit protection	yes			

Measuring/setting range

Measuring range	0...1 bar	0...1000 mbar	0...14.5 psi	0...100 kPa
-----------------	-----------	---------------	--------------	-------------

Accuracy / deviations


Repeatability [% of the span]	< 0,1; (with temperature fluctuations < 10 K)			
Characteristics deviation [% of the span]	< 0,25 (BFSL) / 0,5; (incl. linearity, zero and span error (limit value setting))			
Linearity deviation [% of the span]	< 0,2 (BFSL)			
Long-term stability [% of the span]	< 0,2; (per year)			
Temperature coefficient zero point	< ± 0,2; (0...50 °C)			

PS4607



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 1BAR 30M FEP CABLE

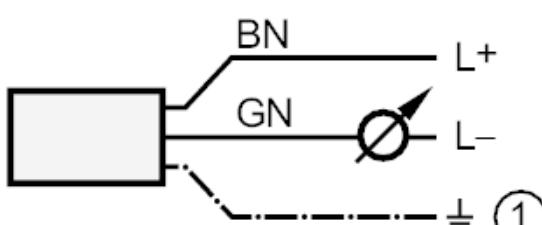[% of the span / 10 K]				
Temperature coefficient span [% of the span / 10 K]	< ± 0,2; (0...50 °C)			
Operating conditions				
Ambient temperature [°C]		-10...85		
Storage temperature [°C]		-30...80		
Protection		IP 68		
Tests / approvals				
MTTF [years]		403		
Pressure Equipment Directive	Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request			
Mechanical data				
Weight [g]		2376		
Materials	stainless steel (1.4571/316Ti); PA			
Remarks				
Pack quantity		1 pcs.		
Electrical connection				
Cable: 30 m, FEP, Ø 7.5 mm				
Connection				
				
1:	screen (connected to the housing)			
	Core colours :			
BN =	brown			
GN =	green			