Note: This datasheet may be out of date.

Please download the latest datasheet of LQH44PH3R3MPR# from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LQH44PH3R3MPR%23

"#" indicates a package specification code.

LQH44PH3R3MPR#

Size Code 4040 (1515) in mm (in inch), 1.8mm max. Thickness. Low DC resistance design




















< List of part numbers with package codes > LQH44PH3R3MPRL



Appearance & Shape

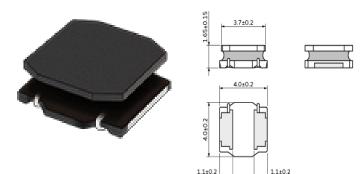

(in mm)

References

Packaging	Specifications	Standard Packing Quantity
L	180Embossed Tape	1000

Mass (typ.)	
1 piece	0.105g



Notices

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max (ambient temperature 85 °C to 105°C).

1 of 2

Attention

- 1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2. This datasheet has only typical specifications because there is no space for detailed specifications
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



LQH44PH3R3MPR#

Note: This datasheet may be out of date. Please download the latest datasheet of LQH44PH3R3MPR# from the official website of Murata $\,$ Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LQH44PH3R3MPR%23

"#" indicates a package specification code.



Specifications

L size	4.0±0.2mm	
W size	4.0±0.2mm	
T size	1.65±0.15mm	
Size code inch (mm)	1515 (4040)	
Inductance	3.3µH±20%	
Inductance Test Frequency	100kHz	
Rated current (Isat) (Based on Inductance change)	2300mA	
Rated current (Itemp) (Based on Temperature rise)	2000mA(Ambient temp.85°C) 1250mA(Ambient temp. 105°C)	
Max. of DC resistance	0.066Ω	
Operating Temperature Range (Self-temperature rise is included)	-40°C to 125°C	
Class of magnetic shield	Magnetic Resin	
Self resonance frequency (min.)	40MHz	
Operating Temperature Range(Self-temperature rise is not included)	-40°C to 105°C	
DC Resistance Intermediate Values	0.055Ω±20%	
Series	LQH44PH_PR	

2 of 2

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

