

CONTEMPORARY



1-4



1-4



1-4



1-4

Bole

high-grade steel/white plastic

1. G96131/82 ⊕ IP44

LED, 12 x 0,07W

A60, E27 max 1 x 60W

↓ 350mm ↔

→ 150mm ∅ 60mm



4 004353 110221

2. G46798/82 ⊕ IP44

LED, 12 x 0,07W

A60, E27 max 1 x 60W

↓ 450mm ↔

→ 240mm ∅ 75mm



4 004353 133749

3. G46789/82 ⊕ IP44

LED, 12 x 0,07W

A60, E27 max 1 x 60W

↓ 500mm ↔

→ 75mm



4 004353 133732

4. G46799/82 ⊕ IP44

LED, 12 x 0,07W


A60, E27 max 1 x 60W

↓ 770mm ↔

→ 75mm



4 004353 133756

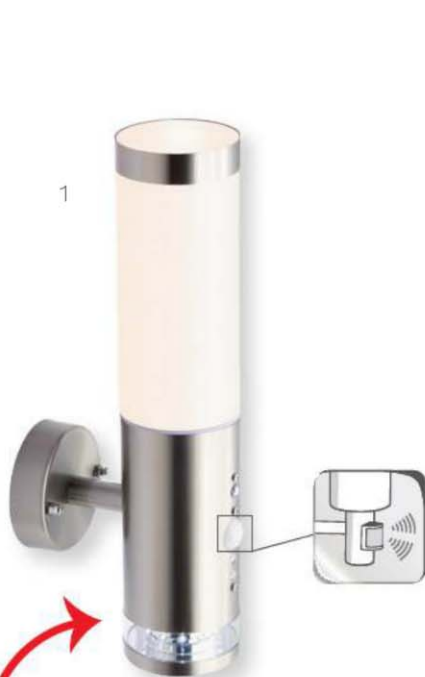

LED schaltet sich bei Dämmerung und Dunkelheit automatisch ein.

LED Daylight sensor turns on automatically by darkness.

Le cercle LED s'allume automatiquement dans l'obscurité.

Accensione LED con sensore crepuscolare.