


A range of diecast boxes in various sizes, manufactured in a robust aluminium alloy. These lightweight enclosures provide excellent screening against EMI/RFI and are therefore ideal housing for electronic components and circuits.

The close fitting lid is secured using countersunk screws. The box also incorporates integral PCB guides, and comes in a plain finish.

Material : Aluminium Alloy
 Box & Lid : LM24
 Screws : Stainless Steel
 : M3.5x9

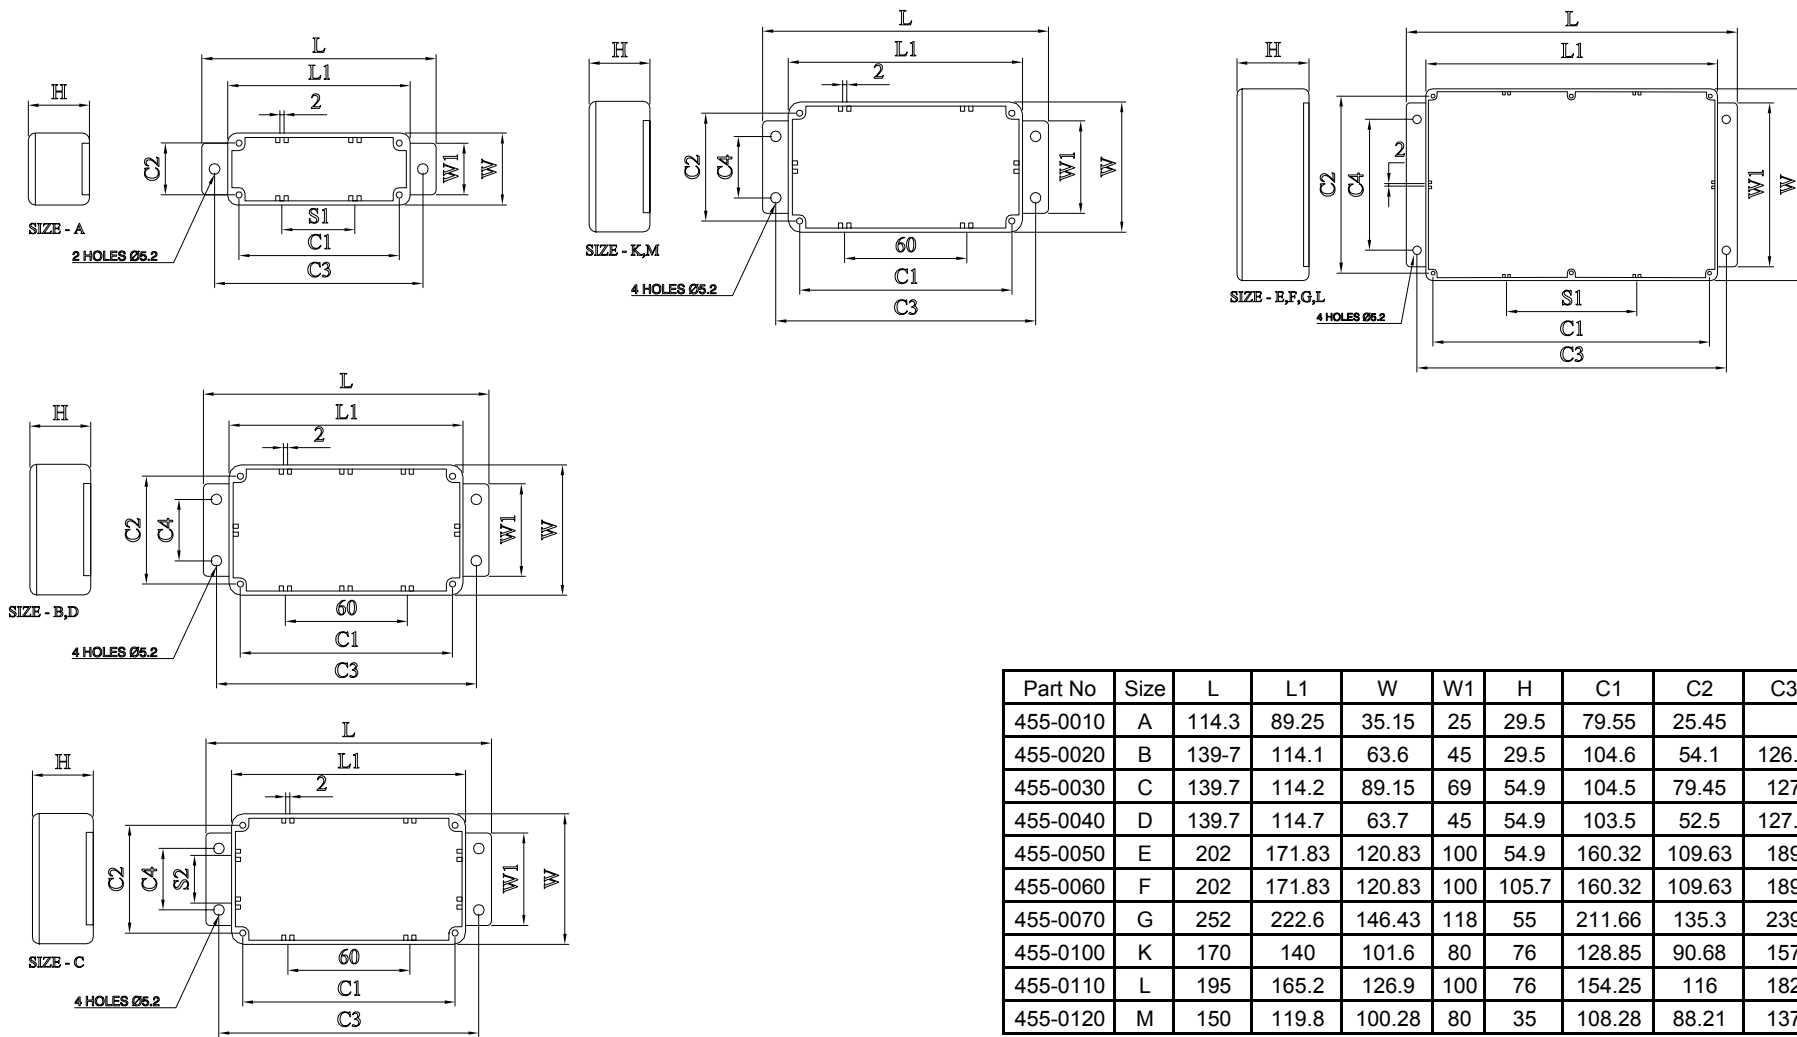

TAPER 1.5° PER SIDE
 BASE TO LID

Part No	Size	L	L1	W	W1	H	C1	C2	C3	C4	S1	S2	Wall Thickness
455-0010	A	114.3	89.25	35.15	25	29.5	79.55	25.45			36		1.5mm
455-0020	B	139.7	114.1	63.6	45	29.5	104.6	54.1	126.9	30	60		1.5mm
455-0030	C	139.7	114.2	89.15	69	54.9	104.5	79.45	127	50	50	36	1.5mm
455-0040	D	139.7	114.7	63.7	45	54.9	103.5	52.5	127.2	30	60		2.0mm
455-0050	E	202	171.83	120.83	100	54.9	160.32	109.63	189	80	80		2.0mm
455-0060	F	202	171.83	120.83	100	105.7	160.32	109.63	189	80	80		2.0mm
455-0070	G	252	222.6	146.43	118	55	211.66	135.3	239	98	100		2.0mm
455-0100	K	170	140	101.6	80	76	128.85	90.68	157	60	64.35		2.0mm
455-0110	L	195	165.2	126.9	100	76	154.25	116	182	80	77		2.0mm
455-0120	M	150	119.8	100.28	80	35	108.28	88.21	137	60	50		2.5mm

DrgNo 455 SERIES

TITLE FLANGED DIECAST BOX

ALL DIMENSIONS IN MM
 ANGLES IN DECIMAL DEGREES



ISSUE 1

GENERAL SPECIFICATION
 FOR 455 SERIES

CUSTOMER		FILTER REF	
Aprvd Date 10/02/03	Aprvd By MC	Drwn by BFS	Scale: NTS
			Sheet 1 / 1

