

## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 600LM 830 36 SL

0029118



### Product features

- Premium performance professional LED GU10 range with the same look and feel of traditional halogen GU10 lamp
- Recreates backlight effect similar to halogen dichroic lamps
- Full glass design - means no colours clashing between lamp and fixture
- Very long lifetime of up to 25,000 hours
- COOLFIT functionality - ensures overheat and over temperature protection
- High switching cycles: >100,000
- High colour rendering: CRI80
- Non dimmable
- Warranty: 5 Years



## PRODUCT OVERVIEW

Product name	RefLED Superia Retro ES50 V3 600LM 830 36 SL
Technology	LED
Watt (Rated) (W)	6
Type	LED exchangeable
Cap/Base	GU10
Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
ETIM Class	EC001959
E-number FI	4741047
Warranty	5 years
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	6
Product Voltage (V)	230
Dimmable	No
Average life (Nominal) (h)	25000
Product EAN number	5410288291185

## DATA TABLE

### General data

Product name	RefLED Superia Retro ES50 V3 600LM 830 36 SL
Technology	LED
Watt (Rated) (W)	6
Type	LED exchangeable
Cap/Base	GU10

## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 600LM 830 36 SL

0029118

Fixture rating	Open
General application	Office, Hospitality, Retail, Education, Residential & Consumer, Museums & Galleries
Operating temperature range (°C)	-20°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741047
Warranty	5 years

### Optical data

Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	1000
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

### Electrical data

Wattage (W)	6
Equivalent watt (W)	80
Product Voltage (V)	230
Control gear required	No
No. Of switching cycles before premature failures	>100000
Transformer required	No
Dimmable	No
Inrush Current (A)	5.12
Inrush Duration (µs)	328
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 16A C Breaker	141
Max. Luminaires per 16A B Breaker	84

### Lifetime data

Lifespan L70 B50	25000
Average life (Nominal) (h)	25000
Average life (Rated) (h)	25000

### Physical data

Nominal Product Height (mm)	54
Nominal Product Diameter (mm)	50
Weight (kg)	0.05

### Packaging

Single packaging type	Carton
-----------------------	--------

## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 600LM 830 36 SL


0029118

Product EAN number	5410288291185
Packaging single length / height (cm)	8.2
Packaging single width (cm)	6.1
Packaging single depth (cm)	5.1
DUN14 (inner)	25410288291189
Units per inner package	6
Packaging inner length / height (cm)	9.2
Packaging inner width (cm)	16.4
Packaging inner depth (cm)	13.1
DUN14 (outer)	15410288291182
Units per outer package	60
Packaging outer length / height (cm)	20.8
Packaging outer width (cm)	17.8
Packaging outer depth (cm)	68.5


### Safety data

Optimal operating condition (°C)	-20-50
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	None

## PHOTOMETRY

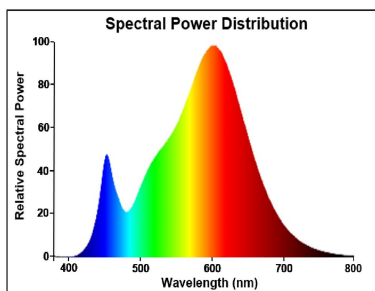

## TECHNICAL DRAWINGS



# SYLVANIA

## RefLED Superia Retro ES50


RefLED Superia Retro ES50 V3 600LM 830 36 SL

0029118



### SYLVANIA

0029118

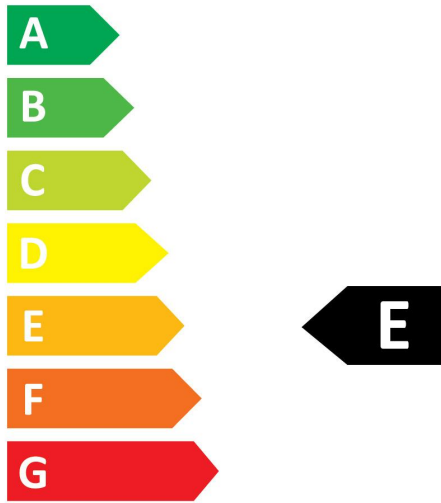

**6**  
kWh/1000h




2019/2015

## RefLED Superia Retro ES50

RefLED Superia Retro ES50 V3 600LM 830 36 SL  
0029118



0029118

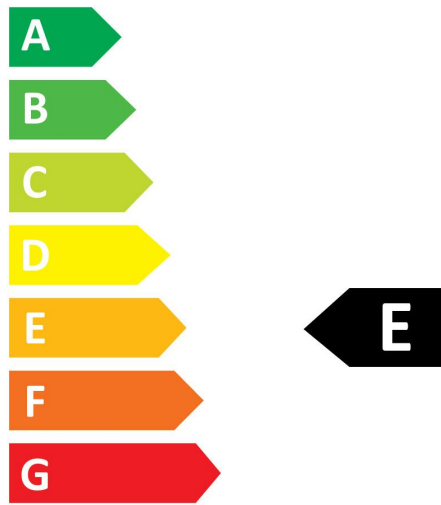

**6**  
kWh/1000h



2019/2015