External Plug In Adapter
90W
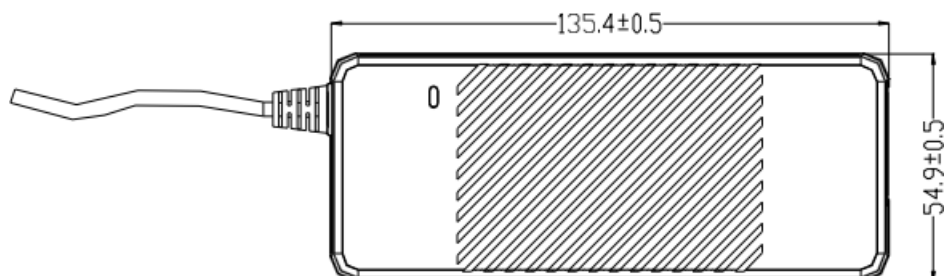
multicomp PRO

RoHS Compliant

Features

- C14 Input
- DOE Level V Efficiency
- Overcurrent Protection
- Short Circuit Protection
- 1 Year Warranty
- EN62368 Approved

Model		MP010267	MP010268
Output	DC Voltage	12V DC	24V DC
	Rated Current	7.5amp	3.75amp
	Current Range	0-7.5amp	0-3.75amp
	Rated Power	90 Watt	
	Ripple & Noise	200m Vp-p max	
	Output Regulation	±5%	
	Output Connector	4 Pin Din	
Input	Voltage Range	90 - 264V AC	
	Frequency Range	47 -63Hz	
	Input Current	1.5amp Max	
	Inrush Current	80amp Max	
	Standby Power	<0.21watt Max	
	Leakage Current	0.25amp Max	
	Efficiency	88%	
	Input Connector	C14	
Environment	Operating Temp	0°C to 40°C	
	Cooling	Convection	
	Temperature Coefficient	0.05%/°C	
	Humidity	5~95%RH(non-condensing)	
	Storage Temp	-20°C to +80%°C	
Safety & EMC	Safety Standards	UL/CuL 62368-1, GS/TUV EN62368-1, UKCA	
	EMC Emissions	EN550022,EN61000-3-2, FCC Part 15 Class B	

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

Page <1>   06/07/22   V1.0

External Plug In Adapter
90W

Mechanical Specification

Dimensions : Millimetres

Part Number Table

Description	Part Number
External Plug In Adapter, 12VDC, 7.5A, C14 Desktop, 4 Pin DIN	MP010267
External Plug In Adapter, 24VDC, 3.75A, C14 Desktop, 4 Pin DIN	MP010268

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO